



Welcome to Novy

For over 50 years, Novy has approached each project with the same goal: to combine quality, craftsmanship and design with the finest materials and expertise to bring silence to your kitchen. Creating enduringly beautiful appliances that perform day after day, year after year, all Novy products are supplied with a full five year parts and labour warranty.

Enhanced by the trend for open plan living, extraction and surface cooking itself has become a defining feature of the modern kitchen. Novy provides subtle, elegant and high design statement products that always complement the architectural character of the space.

We believe a beautifully designed and crafted kitchen is a statement of quality and there is no better way to make a lasting impression than with Novy. Novy is for every kitchen where performance matters, whether your home is a rural retreat or modern city sleek.

5 years warranty

Complementary 5 year warranty
on cooker hoods, worktop extractors,
induction hobs and gas burners.

Register on www.novy.co.uk/warranty and take advantage of a free 5 year warranty* that covers all the costs of any repair (parts, call out fees and labour) on Novy cooker hoods, worktop extractors and induction hobs. You do not need to sign a maintenance agreement or contract for this, all you have to do is register.

* The warranty period begins on the date of purchase (billing date).

You can find the full terms and conditions on www.novy.co.uk. Novy Ltd does not cover expenses or consequential losses that may incur. The warranty provision excludes accidental damage and misuse.

Cooker hood guidelines

20

Venting hobs

28

Ceiling units

68

Built-in cooker hoods for deep cabinets

116

Built-under cooker hoods for shallow cabinets

140

Wall-mounted cooker hoods

162

Island cooker hoods

192

Cooker hood accessories

212

Hobs

222

Info

254

Power, silence and connectivity.

We are the secret ingredient in your kitchen. The silent power of our expertise is incorporated in everything we make. Our cooker hoods and hobs are extremely silent in use and minimalistic in design, created to bring peace to the heart of your kitchen. Powerful too, built with an eye for precision and perfection. And designed so that you can comfortably cook, thanks to smart technology that lets your kitchen appliances communicate. Power, silence and connectivity. And all this behind the scenes.



ABOUT
NOVY

Novy, your kitchen's secret ingredient



POWER

Power is driven by passion. As pioneers, we use this unadulterated energy to push our boundaries further and further. This will to improve, to continue to refine, is for us the basis of everything we create. Every cooker hood and hob is the result of avant-garde technology and years of craftsmanship. Because pure power is what drives us. And that's no different for our appliances.



VER

Novy, your kitchen's secret ingredient



Novy, your kitchen's secret ingredient

The power you feel but don't see

Performance is always our first goal. Our relentless search for how things can be done differently and better led Novy us to pioneer perimeter extraction. This innovative technology immediately captures all cooking vapours where they originate. Faster, and therefore better, because the combination of a powerful motor with grease and carbon filters guarantees that all unpleasant elements are immediately removed from the air.



- High-quality materials and workmanship
- Integrated motor or remote motor
- Innovative extraction
- Multi-layer grease filter
- Extraction or recirculation





Novy, your kitchen's secret ingredient

Craftsmanship with a soul

Our strength lies in solid and well-considered work. In extremely silent, but high-performance motors. In technology, driving to the limit. In wanting to excel. In commitment. But also in our hands.

For us, craftsmanship is the starting point for delivering quality. We share this knowledge and form the connecting factor between pure design, a well-considered choice of materials and perfect execution. Our thinking is reflected in every cooker hood and hob developed and produced in Belgium.

Because that finesse in actions is what makes cooking into an art.







SILE

Silence is what you need to achieve perfection. That's why, at best, there's a whisper in the wings, and why the finishing touch is added to the board with the utmost precision. It's also why our cooker hoods and hobs are remarkably discreet, shrouded in minimalism and visual tranquillity. We carefully eliminate any frivolity or disturbing noise. The result is a design that is pure - nothing but the essence - and a cooker hood that is always quieter than what you cook.



NICE

Novy, your kitchen's secret ingredient



Novy, your kitchen's secret ingredient

We bring silence to your kitchen

We bring peace to your kitchen, so you can put passion in your cooking. We polish our designs to pure lines that combine subtlety with performance. Discreet, silent and strong in their abstraction. Because for us, every detail is a consideration, every choice made to give you freedom.

We understand the power of subtlety. That is why our designs are resolutely geared towards a calm interplay of lines and an eye for detail. Sophisticated design leads the way, combined with comfort in every action.



Strikingly inconspicuous


Our cooker hoods are designed to be quieter than what you are cooking. We've developed an advanced noise reduction system and a double-walled base plate: optimised aerodynamics that reduce resistance. Therefore: less noise, less distraction and also energy efficient.

- Quiet motor
- Advanced silencing system
- Double-walled insulated base plate
- Ventilation tower with adjustable heights
- Recirculation or ducted to the outside
- Adjustable lighting

Visual perfection

Our desire for perfection translates into appliances that blend in seamlessly with their surroundings. We extend this visual tranquillity into every detail to create the timeless elegance.





CON

Intuition is the guiding principle in the kitchen. Our smart technology is designed to let you cook comfortably and to follow your own intuition. By simplifying your life, we give you the freedom to create, to improvise. That's why we continue to refine our technology so that your cooking becomes an experience, a combination of elegance and delicacy. For us, it's all about connection: between people, but also between the cooker hood and hob. Because working together is simply stronger.



NECT

Novy, your kitchen's secret ingredient




Novy, your kitchen's secret ingredient

Connect in a snap

Our smart features let you become one with your kitchen. Thanks to innovative technology, your pots and pans no longer threaten to boil over. Moreover, they always stay at the right temperature, even when you move them. And now you're even alerted when your filters need maintenance so you can continue to enjoy optimum performance. That's how Novy becomes the secret ingredient in your kitchen: a smart tool that makes cooking easier for you.

As a specialist, we've developed a new generation of cooker hoods and hobs. Efficient and designed with the desire to take your cooking to the next level. Above all, it's intuitive, so that every command is at your fingertips.



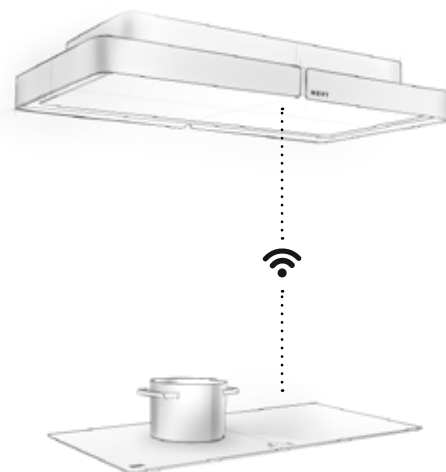

Connectivity matters to us:
between people around the
cooking island, and between the
cooker hood and the hob.



Novy, your kitchen's secret ingredient

Pure technology

Using technology to make your life easier, that's our goal. That's why we develop practical applications that immediately improve the quality of your cooking experience. Smart technology knows when you put a pot on the hob, and even when you move it.

Temperature settings ensure that the water does not boil over. This way, cooking becomes pure intuition, a mix of creativity and freedom.

Our recirculation systems are as durable as they are effective. They eliminate the strongest odours from your kitchen without extracting hot air to the outside. This allows you to recover heat and save energy. And it doesn't stop there, a hood with recirculation provides greater flexibility and is easier to install.



- **Intuitive operation**
- **Combined smart technology**
- **Convenient flex zones**
- **Pot Move function**
- **InTouch technology**
- **Pleasant indoor climate**




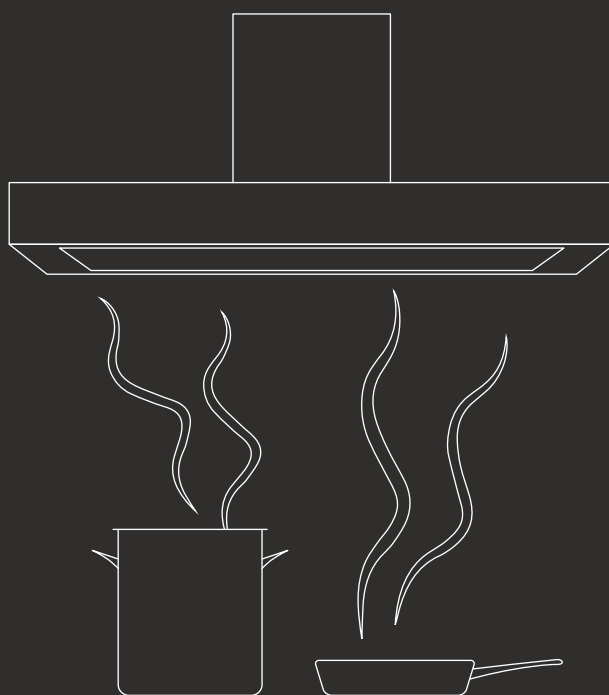


Cooker hood guidelines

The best extraction solution for your kitchen often depends on the architecture of the property you live in, and the style of cooker hood that suits you and your requirements. The following step-by-step plan will help you select the correct kitchen ventilation solution for you.

Step 1 **How wide should your cooker hood be?**

Cooking vapours do not rise straight up, but at an angle between 10 and 15 degrees. For proper operation, the cooker hood must be at least the full width of the hob. For an island arrangement, choose a wider model for efficient extraction. The maximum height of your cooker hood also plays a role. These can be found via the symbol  on the product pages.




Step 2

Extraction to the outside or recirculation?

The choice between extraction to the outside or recirculation depends on the architecture of your property, your wishes and possibilities. It has a major impact on the installation of the kitchen.

Is extraction to the outside (via the roof or facade) possible?

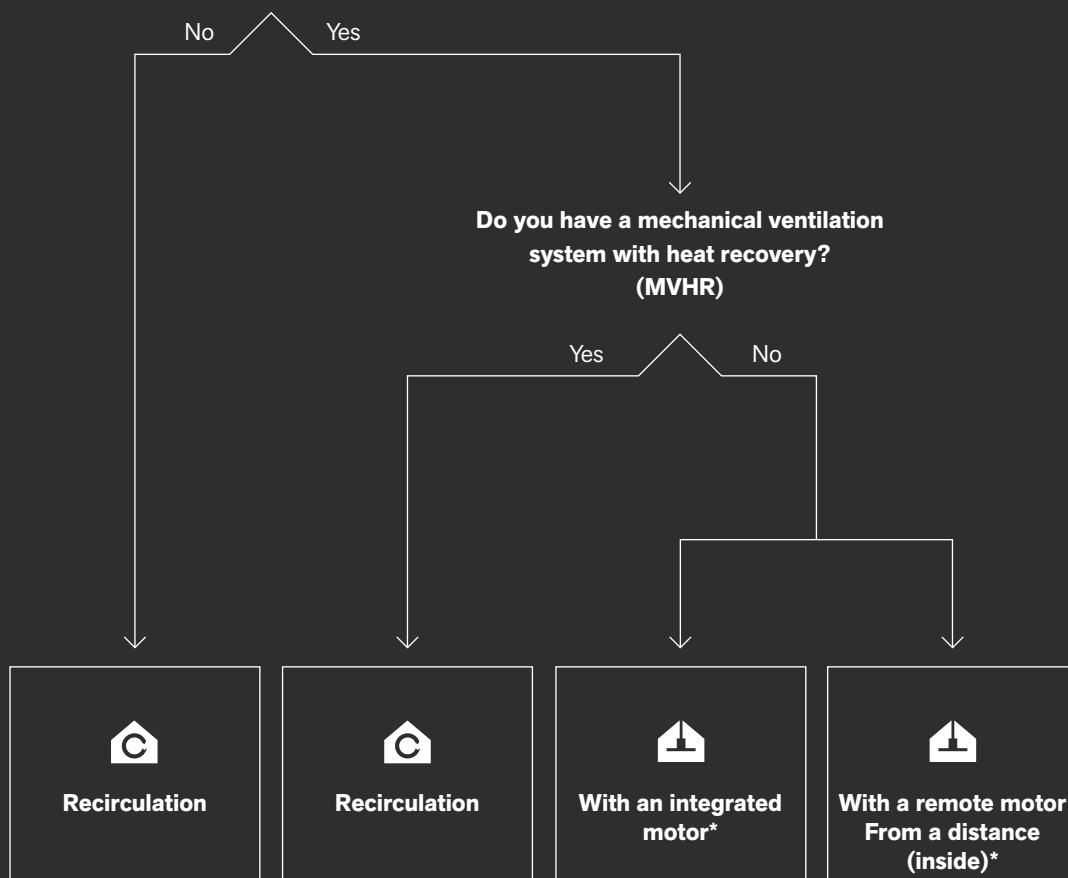

Extraction to the outside is the best solution, but recirculation is an option provided there is sufficient ventilation (to be provided by the customer).

A remote motor enables a limited built-in height for the Pureline and Mini Pureline.

* No outlet without an inlet

A cooker hood works optimally when the extracted air is replaced with fresh air. An insufficient air inlet leads to a loss of efficiency. It is therefore best to provide a sufficient air inlet (via a window extractor, an open door or window, or from another room).



Step 3



Where should you place the cooker hood?



How wide is your hob?



In the worktop



Above a cooking island

65 cm

Select a cooker hood of at least 90 cm

Ceiling units, see p. 68

Cloud
Maxi Pureline
Pureline Pro (Compact)
Pureline (Compact)

Island cooker hoods, see p. 192

Mood
Zen
Flatline

80 cm

Venting hobs, see p. 28

Novy One
Novy Easy

Select a cooker hood of at least 90 cm

Ceiling units, see p. 68

Cloud
Maxi Pureline
Pureline Pro (Compact)
Pureline (Compact)

Island cooker hoods, see p. 192

Mood
Zen
Flatline

90 cm

Venting hobs, see p. 28

Novy Panorama 90
Novy Up

Select a cooker hood of at least 100 cm

Ceiling units, see p. 68

Cloud
Maxi Pureline
Pureline Pro (Compact)
Pureline (Compact)

Island cooker hoods, see p. 192

Mood
Zen
Flatline

100 cm

Select a cooker hood of at least 120 cm

Ceiling units, see p. 68

Maxi Pureline
Pureline Pro (Compact)
Pureline (Compact)

Island cooker hoods, see p. 192

Zen
Flatline

≤ 120 cm

Venting hobs, see p. 28

Novy Panorama 120

Select a cooker hood of at least 150 cm

Ceiling units, see p. 68

Maxi Pureline



Integrated in a ceiling or recess

Select a cooker hood of at least 60 cm

Ceiling units, see p. 68

Pureline Pro (Compact)
Pureline (Compact)

Built-in cooker hoods, see p. 116

Mini Pureline
Crystal
Glass
Essence stainless steel



Telescopic built-in or under the cabinet

Select a cooker hood of at least 60 cm

Built under cooker hoods, see p. 140

Fusion
Fusion Pro
Telescopic stainless steel
Telescopic Essence



Wall-mounted with a decorative cooker hood

Select a cooker hood of at least 75 cm

Wall-mounted cooker hoods, see p. 162

Vision
Headline
Flatline
Proline
Salsa

Select a cooker hood of at least 90 cm

Ceiling units, see p. 68

Pureline Pro (Compact)
Pureline (Compact)

Built-in cooker hoods, see p. 116

Mini Pureline
Crystal
Glass
Essence stainless steel

Select a cooker hood of at least 90 cm

Built under cooker hoods, see p. 140

Fusion
Fusion Pro
Telescopic stainless steel
Telescopic Essence

Select a cooker hood of at least 90 cm

Wall-mounted cooker hoods, see p. 162

Vision
Headline
Flatline
Proline
Salsa

**Select a cooker hood of
at least 100 cm**

Ceiling units, see p. 68

Pureline Pro (Compact)
Pureline (Compact)

Built-in cooker hoods, see p. 116

Mini Pureline
Crystal
Glass
Essence stainless steel

Select a cooker hood of at least 90 cm

Built under cooker hoods, see p. 140

Fusion
Fusion Pro
Telescopic stainless steel
Telescopic Essence

Select a cooker hood of at least 90 cm

Wall-mounted cooker hoods, see p. 162

Vision
Headline
Flatline
Proline
Salsa

**Select a cooker hood of
at least 120 cm**

Ceiling units, see p. 68

Pureline Pro (Compact)
Pureline (Compact)

**Select a cooker hood of
at least 100 cm**

Built under cooker hoods, see p. 140

Fusion Pro

**Select a cooker hood of
at least 120 cm**

Wall-mounted cooker hoods, see p. 162

Vision
Flatline
Proline

**Select a cooker hood of
at least 150 cm**

Ceiling units, see p. 68

Maxi Pureline

**Select a cooker hood of
at least 120 cm**

Built under cooker hoods, see p. 140

Fusion Pro

**Select a cooker hood of
at least 120 cm**

Wall-mounted cooker hoods, see p. 162

Vision
Flatline
Proline



COOKER HOOD NOVY

Silent power in the kitchen



The best cooker hood is one that does not attract unnecessary attention. Its inconspicuousness is what turns it into a small secret. Cleanly designed, quiet, and technologically advanced. Tranquillity itself.

- Silent motor
- Extensive soundproofing
- Purified indoor air



NOVY

Progressive design

The ultimate package for the best results. That's the Novy cooker hood. It's high-performance technology ensures efficient extraction of cooking fumes and odours. The motor is also equipped with a sound-absorbing system and the finish is the highest quality. Most of all, the design is discreet and beautiful.

Smart functions



InTouch

Operate your cooker hood from your hob with wireless RF communication.

Variable lighting

Customise the lighting: vary between warm and cold tones and dim when you want. The soft on/off button gradually turns the light on or off.





Pure kitchen air

Our **Novy Pure 3.0** technology ensures a pleasant indoor climate. You can count on effective recirculation that keeps even the strongest odours out of your kitchen, without unnecessarily extracting warm, purified air to the outside.

Easy maintenance

Under normal cooking conditions, the carbon filter must be replaced after 3-5 years or 900 hours of cooking (depending on the models). This makes the replacement cost minimal compared to other systems.

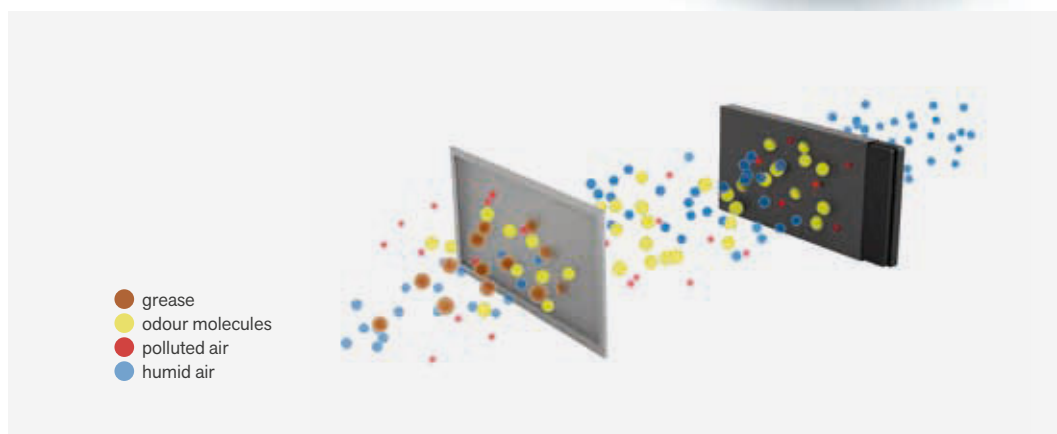

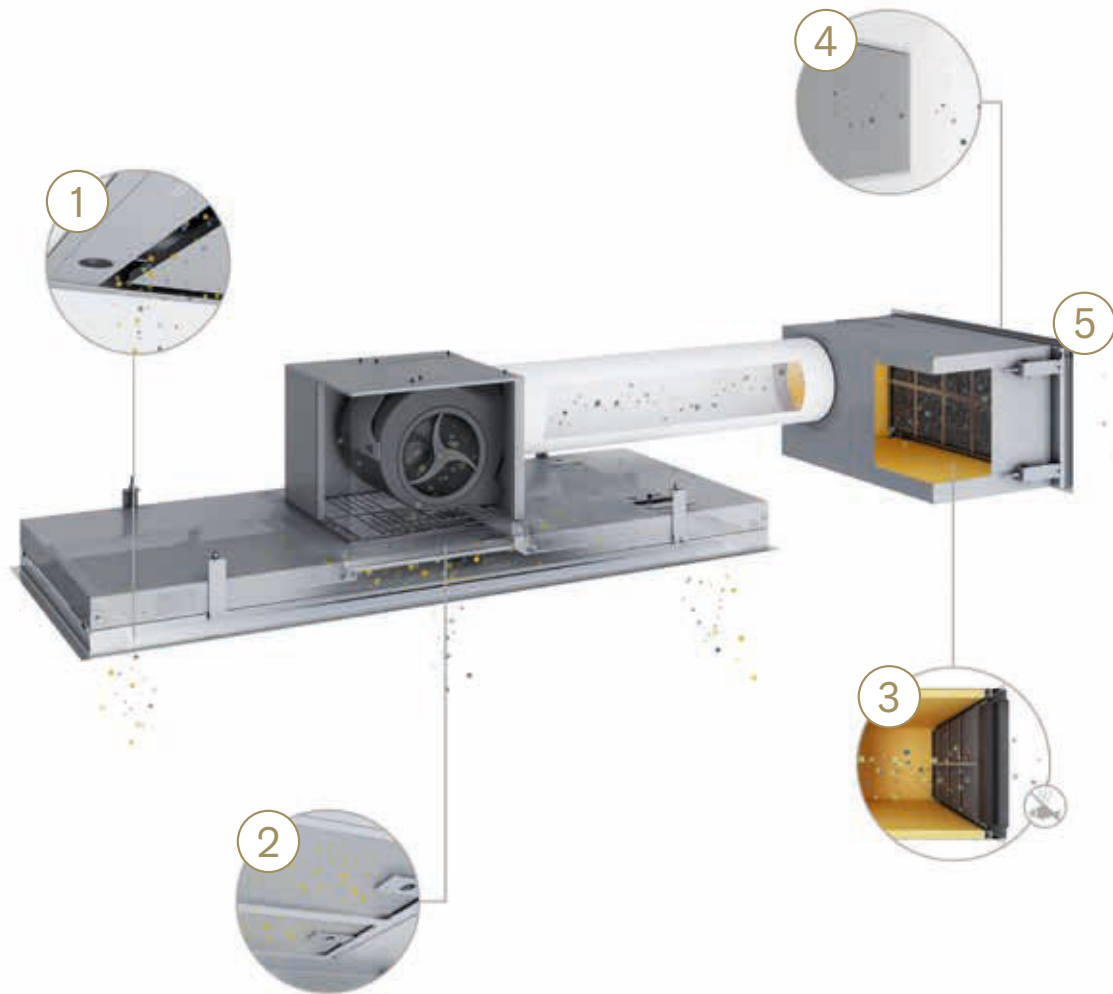

1

Cooking vapours are immediately extracted thanks to the **high-performing, silent motor**.

2

The efficient **multilayer grease filter** captures all the grease particles that are released during cooking.

3

The carbon particles in the **monoblock filter** have a natural coating, exclusively made by Novy. This neutralises the strongest odours - even fish - from 95% up to 100%.

4

The **closed, sound-absorbing airflow system** accompanies the hot cooking fumes and prevents moisture from accumulating in the ceiling or cabinet.

5

The purified hot air is reintroduced into the kitchen, which guarantees **perfect recirculation** and heat recovery.

Video
Why choose Novy Pure
recirculation technology?





Venting hobs

Novy Panorama 90

Novy Panorama 120



Cooking profile

Use



Width (incl. hob) (cm)

Dimensions

88

118

Number of cooking zones

2

3

4

5

6

8



Adjustable height of the extraction tower

Height

10 / 20 / 30

10 / 20 / 30

p. 32

p. 38

Normal use, basic cooking functions, casseroles/
low pots/high pots with lids

Normal use, extensive cooking functions,
casseroles/low pots and high pots with lids

Intensive use, extensive cooking functions,
casseroles/low pots/high pots



Novy One

Novy Up

Novy Easy



	78	49 (incl. 1 Domino hob) 87 (incl. 2 Domino hobs) 136 (incl. 3 Domino hobs) 174 (incl. 4 Domino hobs)	80
	7 / 11	0 / 10	0

p. 44

p. 52

p. 62



DOWNDRAFT
EXTRACTION



CEILING
UNITS



BUILT-IN
COOKER
HOODS



BUILT-
UNDER
COOKER
HOODS



WALL-
MOUNTED
COOKER
HOODS



ISLAND
COOKER
HOODS



COOKER
HOOD
ACCESSORIES



HOBS



INFO



NOVY DOWNDRAFT EXTRACTION

Opting for freedom of movement

Space in the kitchen is a luxury. Imagine that you can make optimum use of every surface, without disturbing visual elements. Our worktop extraction system rises to capture fumes immediately at the source, and is concealed back within the surface after use. For those who appreciate both refinement and efficiency.

- Extraction at the source with adjustable heights
- Recirculation or ducted to the outside
- Visually incorporated





Special ventilation tower

The most effective way to capture odours and fumes is to catch them directly as they arise. A ventilation tower with an adjustable height is our advanced solution, so that cooking vapours are extracted at source – directly next to the pans.

Recirculation or extraction to the outside

There are two options for extracting fumes and odours: a traditional outlet ducted to the outside or recirculation of the purified air.

The latter option is ideal for energy-efficient homes, or in kitchens where it is not possible to extract the air outside. The built-in recirculation box is equipped with a monoblock filter. This slows down the airflow, which ensures the maximum time for unpleasant odours to be absorbed.





red dot design award
winner 2018



Novy Panorama 90

- Direct extraction at source, thanks to the adjustable height: 10, 20 and 30 cm
- Preset extraction function
- Semi-transparent extraction tower disappears invisibly into the hob
- 3 or 4 cooking zones + bridging functions
- Unique and elegant design
- Easy to maintain
- Surface and flush installation possible



DOWNDRAFT
EXTRACTION



Premium
Product distributed
through a selection of
partners.



Novy Connect
Operation and settings
possible via smartphone
or tablet



3 adjustable positions
10, 20 & 30 cm; depending
on the height of the
cooking pots.



Recirculation
Recirculation is optional.



1821



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob Pro	88×52	4	4 × 200×240	4 × 3700	7680	1821	£ 3,899
Venting induction hob Power	88×52	3	Ø280, 2 × 200×240	2 × 3000, 1 × 1850	6980	1831	£ 3,499
Venting induction hob Power	88×52	4	Ø185, Ø210 2 × 200×240	1 × 1400, 2 × 3000, 1 × 1850	7680	1841	£ 3,599

	Motor	Colour	Width (cm)	EEI	Maximum flow rate (m³/h)	Sound level during normal use in dB(A) (re 1 pW)	
						Minimum	Maximum
Extraction	Integrated	Black	81	B	691	37	57




Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video
Panorama





Technical specifications

	Novy Panorama 90 1821	Novy Panorama 90 1831	Novy Panorama 90 1841
Controls			
Type of controls	Slider touch control	Touch control	Touch control
Control Colour	White	Red	Red
Glass built-in / Finish			
Finish	Round border	Round border	Round border
Surface / Flush	▪ / ▪	▪ / ▪	▪ / ▪
Black opaque glass	▪	▪	▪
Induction hob functions			
Number of power levels	9 + Power + Super Power	9 + Power	9 + Power
Automatic pot detection	▪		
Flexzones	▪ (2×)	▪ (1×)	▪ (1×)
Automatic flexzone bridge function	▪		
Manual flex zone bridge function	▪	▪	▪
Stop & Go	▪		
Safety lock hob	▪	▪	▪
Timer on each zone	▪	▪	▪
Count-up timer	▪	▪	▪
Automatic cooking	▪		
Keep-warm function	42, 70 and 94°		
Grill function	▪		
Cooking zones			
Cooking zone 1	Left	Left	Left
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)	Ø 280 / 2300 (3000)	Ø 185 / 1100 (1400)
Cooking zone 2	Left central	Central	Left central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)	200×240 / 2100 (3000)	Ø 210 / 2300 (3000)
Cooking zone 3	Right central	Right	Right central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)	200×240 / 1600 (1850)	200×240 / 2100 (3000)
Cooking zone 4	Right		Right
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)		200×240 / 1600 (1850)
			
Cooker hood functions			
Preset extraction function	▪	▪	▪
Manual suction function	▪	▪	▪
Number of speed settings	5+ 3 intensive	5+ 3 intensive	5+ 3 intensive
Run-on timer (min.)	10-30 (default setting)	10-30 (default setting)	10-30 (default setting)
Cleaning indicator for grease filter	▪	▪	▪
Cleaning indicator for recirculation filter	▪	▪	▪
Safety lock cooker hood	▪	▪	▪
Extraction height tower (cm)	10, 20, 30	10, 20, 30	10, 20, 30
Extraction height tower freely adjustable	▪	▪	▪
Collection container for cleaning	2 up, 2 downwards	2 up, 2 downwards	2 up, 2 downwards
Dimensions (mm)			
Dimensions device (W×D×H)	880×520×65	880×520×65	880×520×65
Dimensions cooker hood (W×D×H)	818×165×760–840	818×165×760–840	818×165×760–840
Exhaust opening diameter	89×222	89×222	89×222
Exhaust position	Central under (rear/front)	Central under (rear/front)	Central under (rear/front)
Opening	See p. 252-253	See p. 252-253	See p. 252-253
Technical characteristics			
Integrated motor	▪	▪	▪
Weight cooker hood / motor casing (kg)	50.1	50.1	50.1
Electrical connection value (W)	7680	6980	7680
Cooker hood supply voltage	230 V	230 V	230 V
Induction hob supply voltage	230 V / 400 V - 1N / 2N / 3N	230 V / 400 V - 1N / 2N / 3N	230 V / 400 V - 1N / 2N / 3N



Air quantity and sound level

Type	Maximum free flow rate (m ³ /h)	Air quantity (m ³ /h) / pressure (Pa)			Noise level dB(A) sound pressure (re20μPa) / sound power (re 1pW)		
		Minimum	Continuous	Power setting	Minimum	Continuous	Power setting
1821 Integrated motor	1160	193 / 40	475 / 204	691 / 443	27 / 37	46 / 57	56 / 65
1831 Integrated motor	1160	193 / 40	475 / 204	691 / 443	27 / 37	46 / 57	56 / 65
1841 Integrated motor	1160	193 / 40	475 / 204	691 / 443	27 / 37	46 / 57	56 / 65



Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical drawing

Novy Panorama

1821 / 1831 / 1841

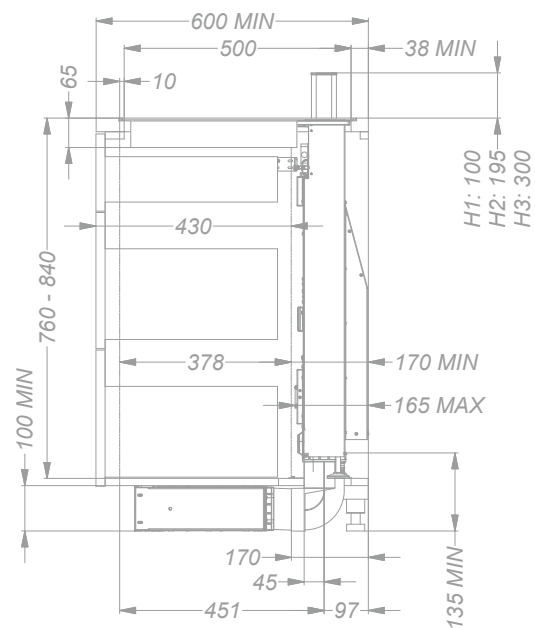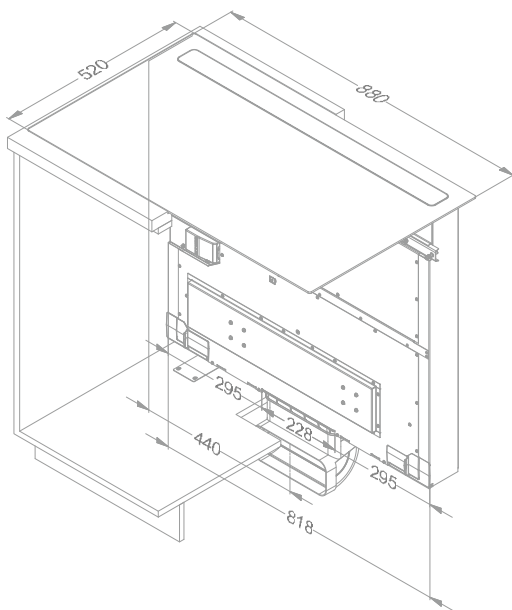

Comment

Built-in lower cabinet from 90 cm without post and with removable back plate.

If the cabinet height is less than 76cm, always order the installation kit for cabinet with article number: 1821.400.

Video
Installation video



Accessories


	Reference	Price/pc	1821	1831	1841
Miscellaneous					
Grease filter left	1821.020	£ 59	•	•	•
Grease filter right	1821.134	£ 59	•	•	•
Side profiles kit for hob	1700.092	£ 51	•	•	•
Grill plate	1700.093	£ 249	•		
Teppanyaki plate	1700.095	£ 249	•		
Installation kit for cabinet	1821.400	£ 129	•	•	•
Input / output module	990.036	£ 169	•	•	•





Accessories

	Reference	Price/pc	1821	1831	1841
Recirculation					
Built-in box (98 mm high) with monoblock filter (98×818×290 mm)					
White (≈RAL 9003)	7921.400	£ 379	▪	▪	▪
Black (≈RAL 9005)	7922.400	£ 379	▪	▪	▪
Grey (≈RAL 7030)	7923.400	£ 379	▪	▪	▪
Monoblock replacement filter (2 pcs to order)	7910.055	£ 129	▪	▪	▪



Video
Video recirculation





Novy Panorama 120

- Direct extraction at source, thanks to the adjustable height: 10, 20 and 30 cm
- Preset extraction function
- Semi-transparent extraction tower disappears invisibly into the hob
- 3 or 4 cooking zones + bridging functions
- Unique and elegant design
- Easy to maintain
- Surface and flush installation possible



DOWNDRAFT
EXTRACTION



Premium
Product distributed
through a selection of
partners.



Novy Connect
Operation and settings
possible via smartphone
or tablet



3 adjustable positions
10, 20 & 30 cm; depending
on the height of the
cooking pots.



Recirculation
Recirculation is optional.



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob Pro	118×52	4	Ø280, Ø230, 2× 200×240	4× 3000	7400	42110	£ 4,399
Venting induction hob Pro	118×52	5	Ø280, 4× 200×240	5× 3000	10400	42120	£ 4,599

	Motor	Colour	Width (cm)	EEI	Maximum flow rate (m³/h)	Sound level during normal use in dB(A) (re 1 pW)	
						Minimum	Maximum
Extraction	Integrated	Black	110	B	1051	41	60

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Video

Panorama 120 Teaser video







Technical specifications

	Novy Panorama 120 42110	Novy Panorama 120 42120
Controls		
Type of controls	Slider touch control	Slider touch control
Control Colour	White	White
Glass built-in / Finish		
Finish	Round border	Round border
Surface / Flush	• / •	• / •
Black opaque glass	•	•
Induction hob functions		
Number of power levels	9 + Power + Super Power	9 + Power + Super Power
Automatic pot detection	•	•
Flexzones	• (1 ×)	• (2 ×)
Automatic flexzone bridge function	•	•
Manual flex zone bridge function	•	•
Stop & Go	•	•
Safety lock hob	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Automatic cooking	•	•
Keep-warm function	70°	70°
Count-up timer	•	•
Chef function	•	•
Grill function	•	•
Cooking zones		
Cooking zone 1	Left	Left
Dimensions (mm) / Power (Boost) W	Ø 280 / 2100 (3000)	200×240/ 2100 (3000)
Cooking zone 2	Left central	Left central
Dimensions (mm) / Power (Boost) W	Ø 230 / 2100 (3000)	200×240/ 2100 (3000)
Cooking zone 3	Right central	Central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3000)	Ø 280 / 2100 (3000)
Cooking zone 4	Right	Right central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3000)	200×240/ 2100 (3000)
Cooking zone 5		Right
Dimensions (mm) / Power (Boost) W		200×240/ 2100 (3000)
		
Cooker hood functions		
Preset extraction function	•	•
Manual suction function	•	•
Number of speed settings	5+ 3 intensive	5+ 3 intensive
Run-on timer (min.)	10-30 (default setting)	10-30 (default setting)
Cleaning indicator for grease filter	•	•
Cleaning indicator for recirculation filter	•	•
Safety lock cooker hood	•	•
Extraction height tower (cm)	10, 20, 30	10, 20, 30
Extraction height tower freely adjustable	•	•
Collection container for cleaning	2 up, 2 downwards	2 up, 2 downwards
Dimensions (mm)		
Dimensions device (W×D×H)	1180×520×65	1180×520×65
Dimensions cooker hood (W×D×H)	1100×162×760–840	1100×162×760–840
Exhaust opening diameter	89×222	89×222
Exhaust position	2×Central under (rear/front)	2×Central under (rear/front)
Opening	See p. 252-253	See p. 252-253
Technical characteristics		
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	56.0	56.4
Electrical connection value cooker hood (W)	450	450
Electrical connection value induction hob (W)	7400	10400
Cooker hood supply voltage	230 V	230 V
Induction hob supply voltage	230 V / 400 V - 1N / 2N	230 V / 400 V - 1N / 2N / 3N

		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
			Minimum	Continuous	Power setting	Minimum	Continuous	Power setting
42110	Integrated motor	1530	243 / 32	649 / 199	1051 / 525	28 / 41	48 / 60	58 / 71
42120	Integrated motor	1530	243 / 32	649 / 199	1051 / 525	28 / 41	48 / 60	58 / 71

Technical drawing

42110 / 42120

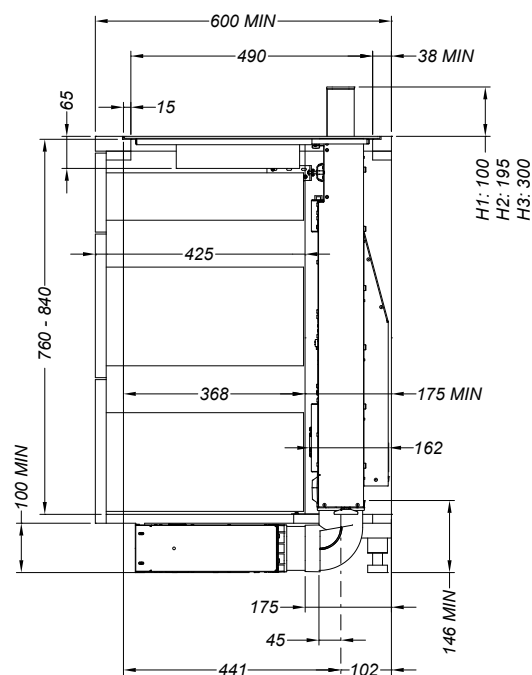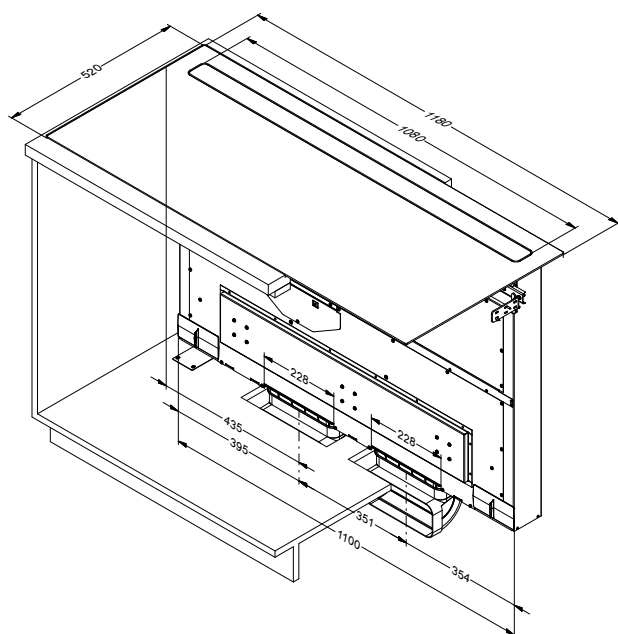

If the cabinet height is less than 76cm, always order the installation kit for cabinet with article number: 1821.400.


Accessories

	Reference	Price/pc	42110	42120
Miscellaneous				
Grease filter left	42120.020	£ 79	▪	▪
Grease filter right	42120.134	£ 79	▪	▪
Side profiles kit for hob	1700.092	£ 51	▪	▪
Grill plate	1700.093	£ 249	▪	▪
Teppanyaki plate	1700.095	£ 249	▪	▪
Installation kit for cabinet	1821.400	£ 129	▪	▪
Input / output module	990.036	£ 169	▪	▪



Accessories

	Reference	Price/pc	42110	42120
Recirculation				
Built-in box (98 mm high) with monoblock filter (98×818×290 mm)				
White (≈RAL 9003)	7941.400	£ 579	▪	▪
Black (≈RAL 9005)	7942.400	£ 579	▪	▪
Grey (≈RAL 7030)	7943.400	£ 579	▪	▪
Monoblock replacement filter (set)	98.001	£ 389	▪	▪





Novy One

- Direct extraction where the vapour is generated thanks to the central extraction tower
- Optimised airflow due to elegant grille finish
- Discreet tilt flap for directional extraction
- Extraction tower disappears almost invisibly into hob
- 4 cooking zones and useful functions
- Surface-mounting and flush-mounting possible



DOWNDRAFT
EXTRACTION



Premium
Product distributed
through a selection of
partners.



Flex zones
Automatic or manual
bridge function of 2
cooking zones.



Recirculation
Recirculation is optional.



1801



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob Power	78×52	4	4× 240×200	2×3000 + 2×1850	7560	1801	£ 2,799
Venting induction hob Pro	78×52	4	4× 240×200	4× 3700	7560	1811	£ 3,299

					Sound level during normal use in dB(A) (re 1 pW)		
Motor	Colour	Width (cm)	EEI	Maximum flow rate (m³/h)	Minimum	Maximum	
Extraction	Integrated	Black	11	B	563	51	70



Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video
One





Technical specifications

	One Power 1801	One Pro 1811
Controls		
Type of controls	Touch control	Slider touch control
Control Colour	Red	White
Glass built-in / Finish		
Finish	Round border	Round border
Surface / Flush	▪ / ▪	▪ / ▪
Black opaque glass	▪	▪
Induction hob functions		
Number of power levels	9 + Power	9 + Power + Super Power
Automatic pot detection		▪
Flexzones	▪ (2×)	▪ (2×)
Automatic bridge function flexzones		▪
Manual bridge function flexzones	▪	▪
Stop & Go		▪
Safety lock hob	▪	▪
Timer on each zone	▪	▪
Independent cooking timer	▪	▪
Automatic cooking		▪
Keep-warm function		42, 70 and 94
Grill function		▪
Cooking zones		
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (Boost) W	240×200 / 1600 (1850)	240×200 / 2100 (3700)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (Boost) W	240×200 / 2100 (3000)	240×200 / 2100 (3700)
Cooking zone 3	Right front	Right front
Dimensions (mm) / Power (Boost) W	240×200 / 2100 (3000)	240×200 / 2100(3700)
Cooking zone 4	Back right	Back right
Dimensions (mm) / Power (Boost) W	240×200 / 1600 (1850)	240×200 / 2100 (3700)
		
Cooker hood functions		
Number of speed settings	Continuous	Continuous
Run-on timer (min.)	10–30 (default setting)	10–30 (default setting)
Cleaning indicator for grease filter	▪	▪
Cleaning indicator for recirculation filter	▪	▪
Venting valve for aspiration direction	▪	▪
Extraction height tower (cm)	7, 11	7, 11
Collection container for cleaning	3 –fold	3 –fold
Dimensions (mm)		
Dimensions appliance (W×D×H)	780×520×192	780×520×180
Exhaust opening diameter	89×222	89×222
Exhaust position	Rear left / left downwards	Rear left / left downwards
Opening (B×D)	See p. 252-253	See p. 252-253
Technical characteristics		
Integrated motor	▪	▪
Weight cooker hood / motor casing (kg)	21	21
Electrical connection value (W)	7560	7560
Multiphase supply voltage	230 V / 400 V - 2N / 3N	230 V / 400 V - 2N / 3N
Single-phase supply voltage	230 V	230 V





Air quantity and sound level

Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)		Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)	
			Minimum	Continuous	Minimum	Continuous
1801	Integrated motor	1063	224 / 111	563 / 617	40 / 51	60 / 70
1811	Integrated motor	1063	224 / 111	563 / 617	40 / 51	60 / 70

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical drawing

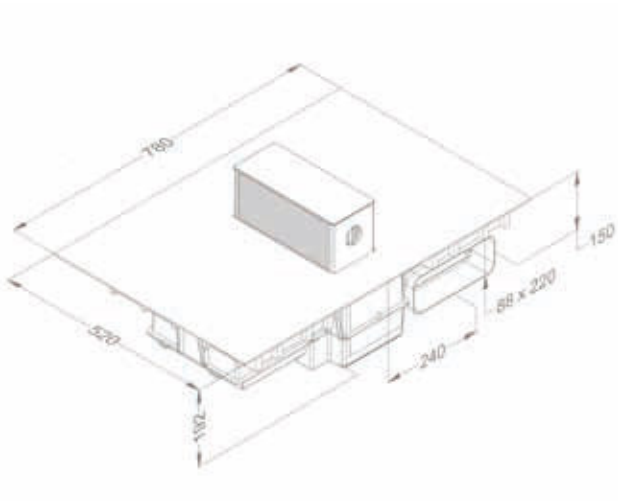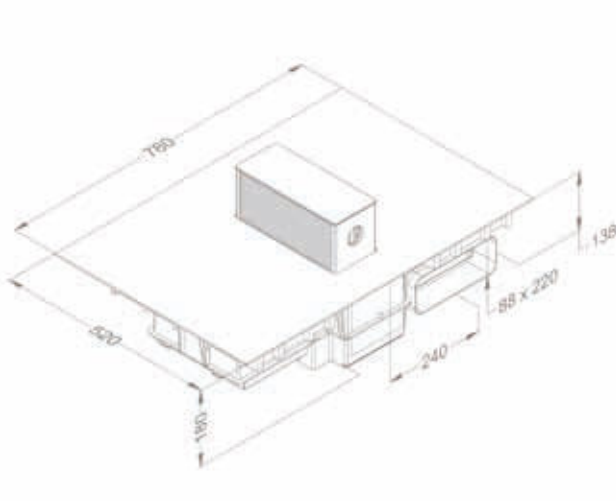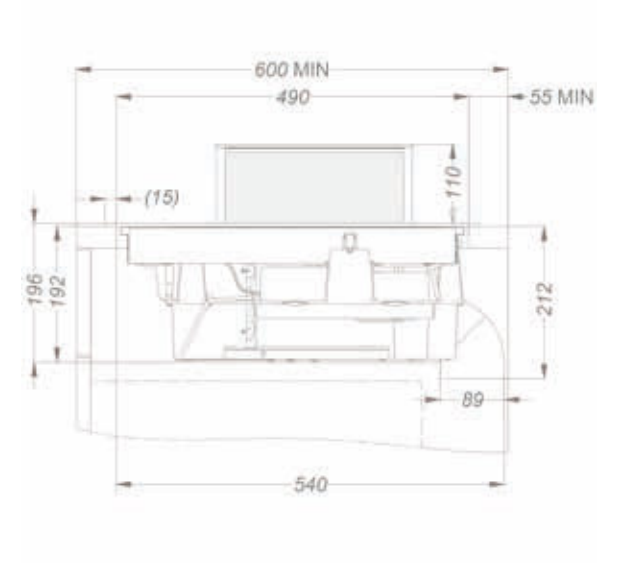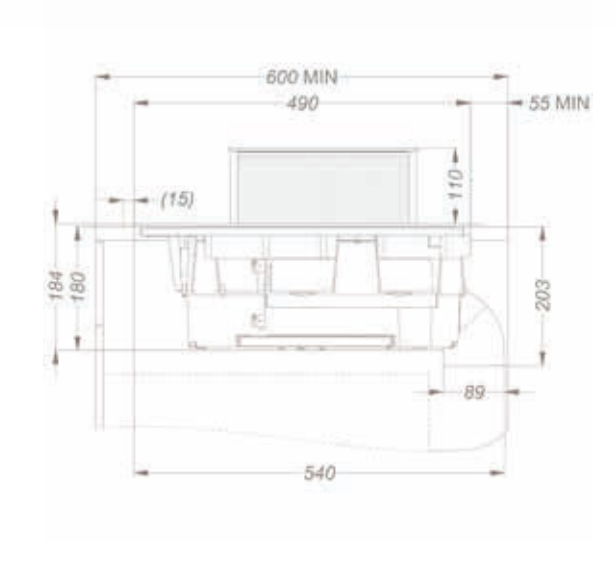One Power	One Pro
1801	1811
	
	

Accessories

	Reference	Price/pc	1801	1811
Miscellaneous				
Grease filter (2 pcs to order)	99.001	£ 99	▪	▪
Side profiles kit for hob	1700.092	£ 51	▪	▪
Input / output module	990.034	£ 169	▪	▪
Grill plate	1700.093	£ 249		▪
Teppanyake plate	1700.095	£ 249		▪






Accessories

	Reference	Price/pc	1801	1811
Recirculation				
Built-in box (98 mm high) with monoblock filter (98×818×290 mm)				
White (≈RAL 9003)	7921.400	£ 379	▪	▪
Black (≈RAL 9005)	7922.400	£ 379	▪	▪
Grey (≈RAL 7030)	7923.400	£ 379	▪	▪
Monoblock replacement filter (2 pcs to order)	7910.055	£ 129	▪	▪
Installation kit with monoblock filter (98x818x290mm) incl. Ref 906.401 + 2x 906.402 + 906.404				
White (≈RAL 9003)	1811.821	£ 449	▪	▪
Black (≈RAL 9005)	1811.822	£ 449	▪	▪
Grey (≈RAL 7030)	1811.823	£ 449	▪	▪
Monoblock replacement filter (2 pcs to order)	7910.055	£ 129	▪	▪



DOWNDRAFT
EXTRACTION

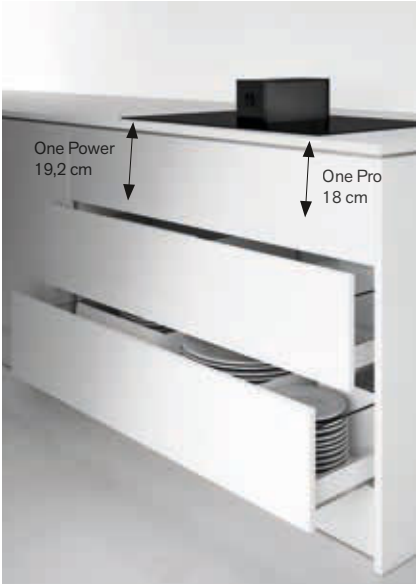









Novy Up

- Direct extraction of cooking vapours thanks to the adjustable flap and central extraction tower
- Manual operation of the extraction tower
- Adjustable flap with adjustable height for directional extraction
- Extraction tower disappears in between the domino hobs
- Choice of various cooking setups
- Surface and flush installation possible



DOWNDRAFT
EXTRACTION



Recirculation

Recirculation is optional.




	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob Power	49×52	2	2× 240×200	3000 + 1850	3700	40 000	£ 2,299
Venting induction hob Comfort	87×52	4	2× ø175, 2× ø210	2x 3000 + 2x 1400	7400	40 002	£ 2,999
Venting induction hob Power	87×52	4	2× 240×200	2x 3000 + 2x 1850	7400	40 004	£ 3,199
Venting induction hob Power + Teppan	87×52	4	2× 240×200	3000 + 1850 + 2800	6500	40 006	£ 4,599
Venting induction hob Power + Wok	87×52	3	2× 240×200	3000 + 1850 + 3200	6900	40 008	£ 4,499

Sound level during normal use in dB(A) (re 1 pW)



	Motor	Colour	Width (cm)	EEI	Maximum flow rate (m³/h)	Minimum	Maximum
Extraction	Integrated	Black	11	B	537	57	61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.




Video
Up



**Technical specifications**

	Novy Up 40 000	Novy Up 40 002
Controls		
Type of controls	Touch control	Touch control
Control colour	Red	Red
Glass built-in / Finish		
Finish	Round border	Round border
Surface / flush	▪ / ▪	▪ / ▪
Black opaque glass	▪	▪
Induction hob functions		
Number of power levels	9 + Power	9 + Power
Flexzones	▪ (1 ×)	
Manual bridge function flexzones	▪	
Stop & Go		
Safety lock hob	▪	▪
Timer on each zone	▪	▪
Independent cooking timer	▪	▪
Keep-warm function		
Cooking zones		
Number of cooking zones	2	4
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (BOOST) (W)	240×200 / 1600 (1850)	175 / 1100 (1400)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (BOOST) (W)	240×200 / 2100 (3000)	210 / 2300 (3000)
Cooking zone 3		Front right
Dimensions (mm) / Power (BOOST) (W)		175 / 1100 (1400)
Cooking zone 4		Rear right
Dimensions (mm) / Power (BOOST) (W)		210 / 2300 (3000)
		
Cooker hood functions		
Number of speed settings	3 + power	3 + power
Run-on timer (min)	10-30 (default setting)	10-30 (default setting)
Clearing indicator for grease filter	▪	▪
Clearing indicator for recirculation filter	▪	▪
Venting valve for aspiration direction	▪	▪
Extraction height tower (cm)	0, 10	0, 10
Collection container for cleaning	Fixed	Fixed
Tower operation	Manual	Manual
Dimensions (mm)		
Dimensions appliance (WxDxH)(mm)	491×520×228	872×520×228
Exhaust opening diameter (mm)	89×222	89×222
Exhaust position	Rear left / left downwards	Rear left / left downwards
Opening (WxD)	See p. 252-253	See p. 252-253
Technical characteristics		
Integrated motor	▪	▪
Weight cooker hood / motor casing (kg)	20,4	27,4
Electrical connection value cooker hood (W)	155	155
Electrical connection value induction hob (W)	3700	7400
Cooker hood supply voltage	230 V	230 V
Induction hob supply voltage	230 V - 1N	230 V - 1N / 2N



Novy Up 40 004	Novy Up 40 006	Novy Up 40 008
Touch control	Touch control + slider	Touch control + slider
Red	Red	Red
Round border	Round border	Round border
▪ / ▪	▪ / ▪	▪ / ▪
▪	▪	▪
9 + Power	9 + Power	9 + Power
▪ (2×)	▪ (1×)	▪ (1×)
▪	▪	▪
▪	▪ (teppan)	▪ (wok)
▪	▪ (teppan)	▪ (wok)
▪	▪	▪
▪	▪	▪
▪	▪ (teppan)	▪ (wok)
4	4	3
Front left	Front left	Front left
240×200 / 1600 (1850)	240×200 / 1600 (1850)	240×200 / 1600 (1850)
Rear left	Rear left	Rear left
240×200 / 2100 (3000)	240×200 / 2100 (3000)	240×200 / 2100 (3000)
Front right	Front right	Front right
240×200 / 1600 (1850)	1400	360 / 2000 (3200)
Rear right	Rear right	
240×200 / 2100 (3000)	1400	
		
3 + power	3 + power	3 + power
10-30 (default setting)	10-30 (default setting)	10-30 (default setting)
▪	▪	▪
▪	▪	▪
▪	▪	▪
0, 10	0, 10	0, 10
Fixed	Fixed	Fixed
Manual	Manual	Manual
872×520×228	872×520×228	872×520×228
89×222	89×222	89×222
Rear left / left downwards	Rear left / left downwards	Rear left / left downwards
See p. 252-253	See p. 252-253	See p. 252-253
▪	▪	▪
27,4	30,4	31,6
155	155	155
7400	6500	6900
230 V	230 V	230 V
230 V - 1N / 2N	230 V - 1N / 2N	230 V - 1N / 2N

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
			Minimum	Continuous	Power setting	Minimum	Continuous	Power setting
40 000	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40 002	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40 004	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40 006	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40 008	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64




Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawing

Novy Up

40 000

40 002 / 40 004 / 40 006 / 40 008

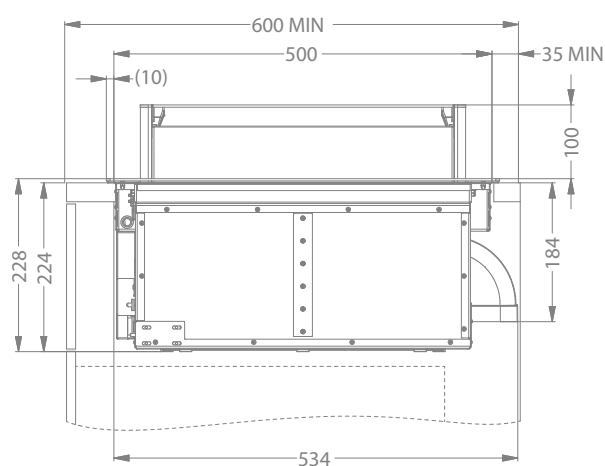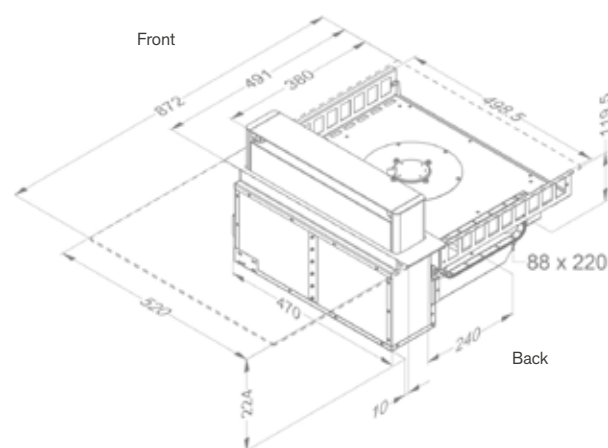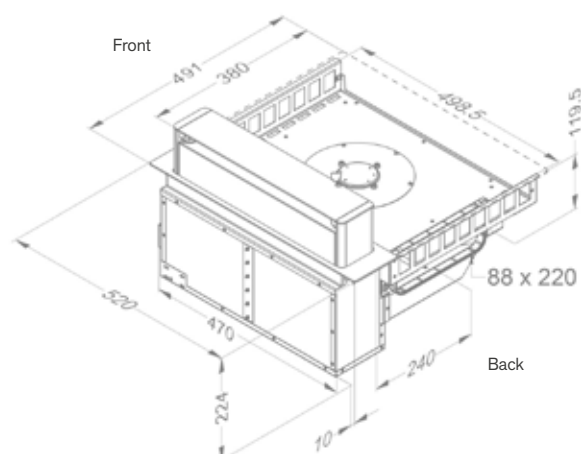

Video
Installation video



Installation options

	Type	Cooking zone	Total width (mm)
	40 000	2	491
	40 002 to 40 008	4	872
	40 000 + 40 002 to 40 008	6	1364
	40 002 to 40 008 + 40 002 to 40 008	8	1745

* Wok or Teppan Yaki should always be positionned to the right.


DOWNDRAFT
EXTRACTION






Accessories

	Reference	Price/pc	40 000-8
Miscellaneous			
Grease filter	99.002	£ 99	▪
Cabelset windowsswitch	990.037	£ 59	▪
Recirculation			
Built-in box (98 mm high) with monoblock filter (98×818×290 mm)			
White (≈RAL 9003)	7921.400	£ 379	▪
Black (≈RAL 9005)	7922.400	£ 379	▪
Grey (≈RAL 7030)	7923.400	£ 379	▪
Monoblock replacement filter (2 pcs to order)	7910.055	£ 129	▪
Installation kit with monoblock filter* (98×818×290 mm) (at a minimum cabinet depth of 60 cm)			
White (≈RAL 9003)	1811.821	£ 449	▪
Black (≈RAL 9005)	1811.822	£ 449	▪
Grey (≈RAL 7030)	1811.823	£ 449	▪
Monoblock replacement filter (2 pcs to order)	7910.055	£ 129	▪

* Built-in box with monoblock filter (98x818x290 mm) incl. references 906.401, 906.402 (2x) & 906.404











Novy Easy

- Optimised airflow due to elegant finish
- Easy maintenance
- Extra large cooking surface
- 4 cooking zones and useful functions
- Surface-mounting and flush-mounting possible
- Monoblock filter with a life span of up to 450 cooking hours



Premium
Product distributed
through a selection of
partners.





Flex zones
Automatic or manual
bridge function of 2
cooking zones.



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Ref.	Price/pc
Venting induction hob Pro with extraction	80×52	4	4× 240×210	4× 3000	7525	1851	£ 2,599
Venting induction hob Pro - recirculation model (incl. Monoblock filter)	80×52	4	4× 240×210	4× 3000	7527	1861	£ 2,749
Sound level during normal use in dB(A) (re 1 pW)							
Motor	Colour	Width (cm)	EEl	Maximum flow rate (m³/h)	Minimum	Maximum	
Extraction	Integrated	Black	10	A	540,4	50	68

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical specifications

	Novy Easy 1851 (extraction)	Novy Easy 1861 (recirculating)
Controls		
Type of controls	Slider touch control	Slider touch control
Control Colour	Red	Red
Glass built-in / Finish		
Finish	Round border	Round border
Surface / Flush	▪ / ▪	▪ / ▪
Black opaque glass	▪	▪
Induction hob functions		
Number of power levels	9 + Power + Super Power	9 + Power + Super Power
Automatic pot detection	▪	▪
Flexzones	▪ (2×)	▪ (2×)
Automatic bridge function flexzones	▪	▪
Manual bridge function flexzones	▪	▪
Stop & Go	▪	▪
Safety lock hob	▪	▪
Timer on each zone	▪	▪
Independent cooking timer	▪	▪
Automatic cooking	▪	▪
Keep-warm function	70°	70°
Count-up timer	▪	▪
Chef function	▪	▪
Grill function	▪	▪
Cooking zones		
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)
Cooking zone 3	Right front	Right front
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)
Cooking zone 4	Back right	Back right
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)
		
Cooker hood functions		
Number of speed settings	9 + Power	9 + Power
Automatic speed control	▪	▪
Run-on timer (min.)	30	30
Cleaning indicator for grease filter	▪	▪
Collection container for cleaning	2 –fold	2 –fold
Dimensions (mm)		
Dimensions appliance (W×D×H)	800×520×225	800×520×225
Exhaust opening diameter	89×222	89×222
Exhaust position	Rear left / left downwards	Rear left / left downwards
Opening (B×D)	See p. 252-253	See p. 252-253
Technical characteristics		
Integrated motor	▪	▪
Weight cooker hood / motor casing (kg)	21	21
Electrical connection value (W)	7527	7525
Multiphase supply voltage	230 V / 400 V - 2N / 3N	230 V / 400 V - 2N / 3N
Single-phase supply voltage	230 V	230 V



Air quantity and sound level

Type		Maximum free flow rate (m ³ /h)	Air quantity (m ³ /h) / pressure (Pa)			Noise level dB(A) sound pressure (re20μPa) / sound power (re 1pW)		
			Minimum	Continuous	Power mode	Minimum	Continuous	Power mode
1851, 1861	Integrated motor	1135	240 / 128	531 / 700	540 / 768	39 / 50	57 / 68	58 / 69

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

DOWNDRAFT
EXTRACTION

Technical drawing

Novy Easy	Novy Easy
1851	1861

For more details, please consult our website and/or technical data sheet.

Accessories

	Reference	Price/pc	1851	1861
Miscellaneous				
Grease filter (2 pcs to order)	99.003	£ 169	▪	▪
Side profiles kit for hob	1700.092	£ 51	▪	▪
Grill plate	1700.093	£ 249	▪	▪
Teppanyake plate	1700.095	£ 249	▪	▪



Accessories

	Reference	Price/pc	1851	1861
Recirculation				
Monoblock replacement filter	98.002	£ 123		.





Ceiling units

Cloud



Pureline Pro Compact



Pureline Compact



Width

90 cm		■	■
110 cm	■		
120 cm		■	■
150 cm			

Colour

White	■	■	■
Stainless steel		■	■
Black	■	■	■

Motor

Integrated	■	■	■
From a distance (inside)			
Not included			

Exhaust

To the outside		■	■
Recirculation	■	Optional	Optional

p. 74

p. 80

p. 86




Pureline Pro

Pureline
(with lighting)

Pureline
(without lighting)

Maxi
Pureline

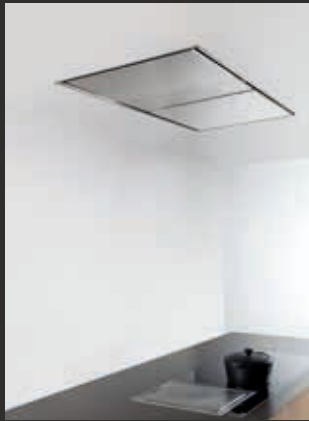

	■	■	■	
	■	■	■	
				■
	■	■	■	■
	■	■	■	■
	■			
	■	■	■	
	■	■	■	■
		■	■	
	■	■	■	■
	Optional	Optional	Optional	Optional

p. 92

p. 98

p. 104

p. 110



CEILING
UNITS



BUILT-
UNDER
COOKER
HOODS



BUILT-
UNDER
COOKER
HOODS



WALL-
MOUNTED
COOKER
HOODS



ISLAND
COOKER
HOODS



COOKER
HOOD
ACCESSORIES



HOB



INFO

Step-by-step plan

The following 5-step plan helps you find your way in choosing the right Novy ceiling unit.

Step 1 Width of the ceiling unit

For a good result the cooker hood must be at least the full width of the hob. Our ceiling units are available in sizes 90, 110, 120 and 150 cm. The following combinations are recommended for the ceiling units (directive):

Width hob	Width ceiling unit	Max. distance between cooker hood and hob
≤ 80 cm ¹	min. 90 cm	160 cm
81 - 109 cm	min. 110 cm	160 cm
110 - 120 cm	min. 120 cm	160 cm
> 120 cm	min. 150 cm	160 cm

¹ For installation in fully suspended ceilings, we recommend a ceiling unit of at least 120 cm for hobs 80 and 90 cm wide.

Step 2 LED lighting

With LED lights

The ceiling unit is equipped with dual LED lighting or a LED strip. The light intensity and colour temperature can be adjusted to your wishes.

Without LED lights

For a minimalistic design. To these ceiling units you can connect external lighting (max. 300 W), which can be operated through the cooker hood, remote control or InTouch technology (not dimmable).

Step 3 Recirculation or exhaust to the outside

Recirculation

If extraction to the outside is not an option, you can choose recirculation instead. For ceiling units it is possible to choose

- 2 types of built-in boxes, each in 3 colours with monoblock filter.
- A basic kit. The basic kit contains a monoblock filter. The monoblock filter is placed directly behind the grease filter. The exhaust grill to let the filtered air back into the kitchen must be provided by you.

Cloud has recirculation as a standard.

With a cooker hood with recirculation, there must be a minimum of ventilation in the room where the cooker hood has been installed. Ventilation can be provided by the overall ventilation in the house or by opening a window and/or door.

Duct out

Novy offers a wide range of installation accessories on p. 220.

A cooker hood works optimally when the extracted air is replaced with fresh air. An insufficient air inlet leads to a loss of efficiency. It is therefore best to provide a sufficient air inlet (via a window extractor, an open door or window, or from another room).

Step 4 Ceiling unit installation options

The Pureline ceiling unit can be installed in 2 ways:

- flush-mounted in the ceiling
- in an alcove or a self-constructed chimney


The Cloud ceiling unit can be mounted directly to the ceiling.

The maximum installation height (between the hob and the underside of the ceiling unit) is 160 cm.

Installation in an alcove or self-constructed chimney




Cooking vapours do not rise straight up, instead they fan out over an angle of between 10° and 15°. For an efficient operation it is important that the whole construction in which the ceiling unit is installed is at least the same width and depth as the hob. Create an overlap of approximately 30 cm around the ceiling unit to prevent cooking vapours from escaping. In addition, edging of 5 to 10 cm high will ensure that fewer vapours can escape.

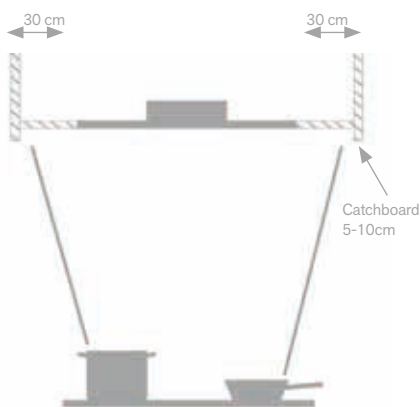

Installation in the ceiling



In this type of installation the ceiling unit is installed in a suspended ceiling and usually covers the entire kitchen. Because the unit is flush with the ceiling, vapours cannot rise higher than the unit itself and are captured along the edges.

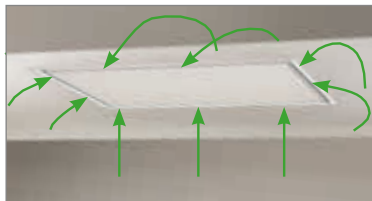

Mounting onto the ceiling



The Cloud ceiling unit only needs to be screwed to the ceiling and does not require any opening in the ceiling. Never before has it been this easy to install a cooker hood. Make sure, however, that your ceiling is sufficiently strong.

Construction of the suspension structure

On the long sides of the Pureline ceiling unit there are mounting clamps that hold the cooker hood in the cut-out opening. For this, the material and thickness must be 18-35 mm.

Never mount directly in the plasterboard, always provide reinforcement (in wood, on the side or by means of a frame) to which the mounting clamps can be clamped.



Adapter for flat duct with limited built-in height

If the built-in depth is limited, it is possible to remove the Cubic motor from the ceiling unit. In this situation, an optional adapter can be ordered. The adapter is placed directly on the ceiling unit and connected to a flat rectangular duct. The motor is then installed in a different location. Please note that the entrance to the motor is round. With adapter 6830.053 the built-in height can be limited to 17,3 cm and with 830.053 to 18,5 cm.

6830.053	Adaptor for Pureline. exhaust direction can be turned to the right, left, front or rear	£ 130
6930.050	Adapter for Pureline Pro. exhaust direction can be turned to the right, left, front or rear	£ 219
830.053	Adaptor for Maxi Pureline (order 2x). Exhaust direction 1x left and 1x right	£ 130



Step 5

Type of motor

Cloud ceiling unit recirculation as standard

This ceiling unit is equipped with recirculation as standard and needs only to be screwed to the ceiling. It is not necessary create an opening in the ceiling.

Ceiling unit motor not included

Models without a motor are combined with an interior motor, wall-mounted motor or flat roof motor

Ceiling unit with compact motor






The ceiling unit, including the compact motor, has a built-in height of only 19.5 cm. The exhaust can be turned to the right, left, front or rear. This motor cannot be removed.

Ceiling unit with a Cubic motor

The integrated Cubic motor offers the necessary flexibility, because the exhaust can be rotated in all directions (right, left, front, rear or above).

The Cubic motor can also be removed and placed elsewhere in the home. The 4 m cable (included) connects the ceiling unit with the motor.

If required, this cable can also be extended (optional). This extension cable is connected to the existing cable and has a length of 5 m.

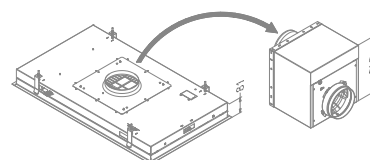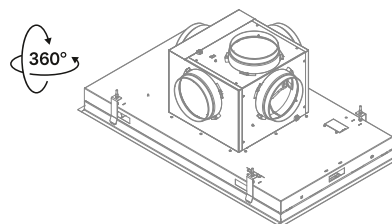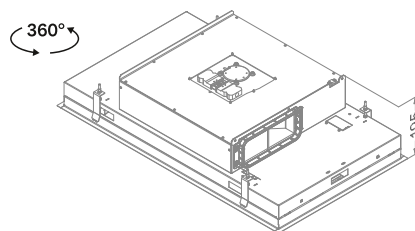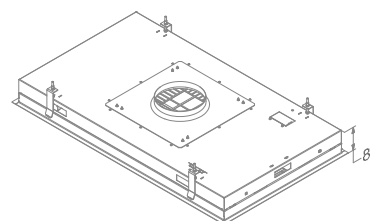

Overview of ceiling units

Step 2

Step 1

		With LED lights		Without LED lights	
Pureline 90 cm	Stainless steel	Compact motor with Novy Sense sensor	6910		
	Stainless steel	Compact motor	6810		
	Stainless steel	Cubic motor with Novy Sense sensor	6930		
	Stainless steel	Cubic motor	6830	Cubic motor	6833
	Stainless steel	Motor not included	6835	Motor not included	6838
	White	Compact motor with Novy Sense sensor	6911		
	White	Compact motor	6811		
	White	Cubic motor with Novy Sense sensor	6931		
	White	Cubic motor	6831	Cubic motor	6834
	White	Motor not included	6836	Motor not included	6839
	Black	Compact motor with Novy Sense sensor	6912		
	Black	Compact motor	6812		
	Black	Cubic motor with Novy Sense sensor	6932		
Pureline 120 cm	Stainless steel	Compact motor with Novy Sense sensor	6920		
	Stainless steel	Compact motor	6820		
	Stainless steel	Cubic motor with Novy Sense sensor	6940		
	Stainless steel	Cubic motor	6840	Cubic motor	6843
	Stainless steel	Motor not included	6845	Motor not included	6848
	White	Compact motor with Novy Sense sensor	6921		
	White	Compact motor	6821		
	White	Cubic motor with Novy Sense sensor	6941		
	White	Cubic motor	6841	Cubic motor	6844
	White	Motor not included	6846	Motor not included	6849
	Black	Compact motor with Novy Sense sensor	6922		
	Black	Compact motor	6822		
	Black	Cubic motor with Novy Sense sensor	6942		
Maxi Pureline 150 cm	Stainless steel			Motor not included	855
	White			Motor not included	856
Cloud 110 cm	White	Motor, recirculation	230		
	Black	Motor, recirculation	232		



Cloud

- Fine lines for pure design
- Adjustable light intensity and colour temperature from 2,700 K to 5,000 K
- Recirculation as standard for additional planning options
- Limited installation height of only 17.6 cm
- Extended lighting function for the right amount of light and atmosphere during and after cooking (cooking mode and mood mode)
- Operation and settings possible via smartphone or tablet, as well as via remote control



CEILING
UNITS



Premium
Product distributed through a selection of partners.



Novy Connect
Operation and settings possible via smartphone or tablet



InTouch
Function for controlling the cooker hood from the hob.



Distance
Maximum distance between cooker hood and hob.



Width (cm)	Motor	Colour	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
				Minimum	Maximum		
110	Integrated	White	504	49	68	230	£ 2,499
	Integrated	Black	504	49	68	232	£ 2,499

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical specifications



Cloud
230 white / 232 black

Functions

Controls	Remote control / Novy Connect
Number of speed settings	4
With noise reduction	▪
Recirculation	▪ (monoblock)
InTouch function for hobs	▪
Auto-Stop, automatic switch-off after 3 hours	▪
Run-on timer (min.)	30
Cleaning indicator for grease filter	▪
Replacement indicator for recirculation filter	▪

Lighting

Type of lighting (W)	LED strip (33) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour ambient mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)

Technical characteristics

Colour	230 white (≈RAL 9003) 232 black (≈RAL 9005)
Integrated motor	▪ (not removable)
Weight cooker hood (kg)	35.5
Mains voltage (V) / Electrical connection value (W)	230 / 175

Dimensions

Dimensions (W×D×H) (mm)	1100×600×176
Exhaust position	Left and right
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600


Air quantity and sound level

		Maximum free flow rate (m ³ /h)	Air quantity (m ³ /h) / pressure (Pa)				Noise level dB(A) sound pressure (re20μPa) / sound power (re 1 pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
230 232	Integrated motor	1010	187	272	343	504	37 / 49	42 / 54	48 / 60	56 / 68

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical drawings

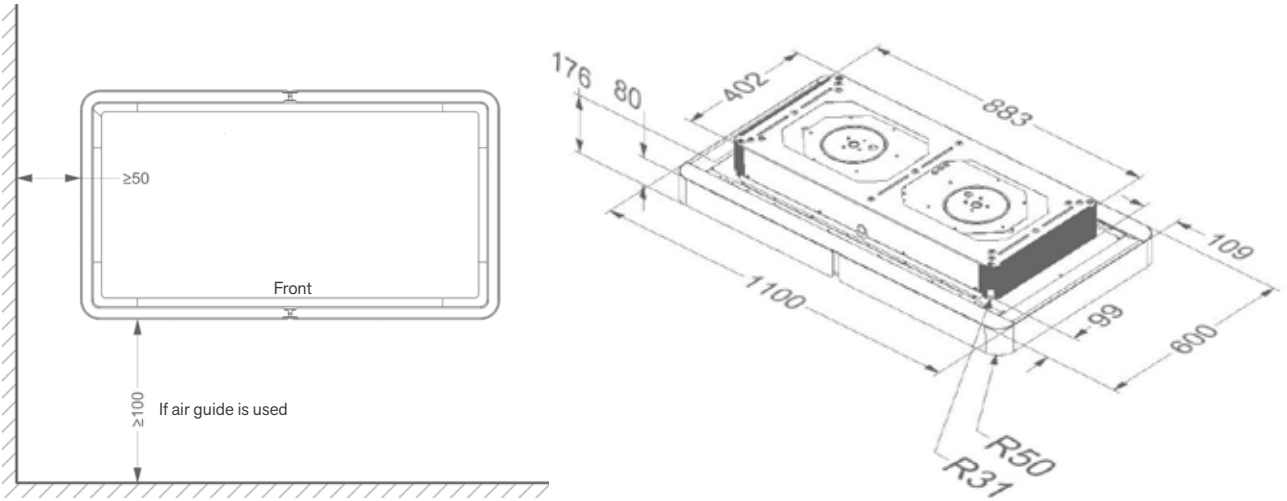

The minimum distance from the left and/or right side of the Cloud to a wall or window may not be less than 50 cm.

Use the supplied air guide if the distance between the left and/or right side of the cooker hood and a wall or window is 50 to 100 cm. At the front of the cooker hood, where the air is blown out, the distance to the wall must then be at least 100 cm.

Accessories

	Reference	Price/pc	230	232
Miscellaneous				
Monoblock replacement filters (set per 4)	230.060	£ 329	•	•
Grease filter (replacement) (2 pcs to order)	230.020	£ 129	•	•
Mounting frame black	230.500	£ 99	•	
Mounting frame white	230.510	£ 99		•










Pureline Pro Compact

- A built-in height of only 19.5 cm thanks to a compact motor
- Flexible installation possibilities due to rotating motor in several directions (left, right, front or rear)
- Maximum efficiency yet extremely quiet
- LED lighting warm white (2,700 K) adjustable to neutral white (5,000 K)
- Ultra slim led strip with extensive lighting function for the right amount of light and atmosphere during and after cooking (cooking mode and ambient mode)
- Automatic speed control with the Novy Sense sensor for detection of cooking vapours and odour
- Operation and settings possible via smartphone or tablet, as well as via remote control or controls on the cooker hood

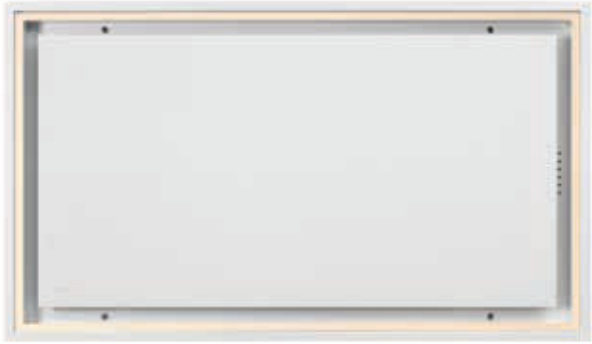

Premium
Product distributed through a selection of partners.



Distance
Maximum distance between cooker hood and hob.



InTouch
Function for controlling the cooker hood from the hob.



Novy Connect
Operation and settings possible via smartphone or tablet



Optional



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated, compact motor	Stainless steel	B	618	41	61	6910	£ 2,099
	Integrated, compact motor	White	B	618	41	61	6911	£ 2,099
	Integrated, compact motor	Black	B	618	41	61	6912	£ 2,099
120	Integrated, compact motor	Stainless steel	B	615	41	61	6920	£ 2,299
	Integrated, compact motor	White	B	615	41	61	6921	£ 2,299
	Integrated, compact motor	Black	B	615	41	61	6922	£ 2,299

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video

Pureline Pro Compact Teaser video



Technical specifications



Pureline Pro Compact 90 cm
6910 stainless steel / 6911 white / 6912 black



Pureline Pro Compact 120 cm
6920 stainless steel / 6921 white / 6922 black

Functions

Controls	Buttons + remote control + Novy Connect	Buttons + remote control + Novy Connect
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
Automatic speed control via Novy Sense sensor	▪	▪
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting

Type of lighting (W)	LED (24) / dimmable	LED (24)) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour ambient mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)	Default setting 2,700 (adjustable between 2,700 and 5,000)

Technical characteristics

Colour	6910 stainless steel 6911 white (≈RAL 9003) 6912 black (≈RAL 9005)	6920 stainless steel 6921 white (≈RAL 9003) 6922 black (≈RAL 9005)
Integrated motor	▪ (not removable)	▪ (not removable)
Weight cooker hood (kg)	29	32
Mains voltage (V) / Electrical connection value (W)	230 / 178	230 / 178

Dimensions

Dimensions (W×D×H) (mm)	868×508×195	1168×508×195
Opening (L×W) (mm)	845×485	1145×485
Exhaust opening diameter (mm)	89×222	89×222
Exhaust position	Right / left / front / rear	Right / left / front / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600



Air quantity and sound level


Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6910, 6911, 6912	Integrated motor	750	262 / 51	481 / 187	558 / 281	618 / 478	29 / 41	44 / 57	50 / 61	51 / 63
6920, 6921, 6922	Integrated motor	750	257 / 50	480 / 187	556 / 291	615 / 499	28 / 41	45 / 57	49 / 61	51 / 64

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings


Pureline Pro Compact 90 cm

6810 / 6811 / 6812

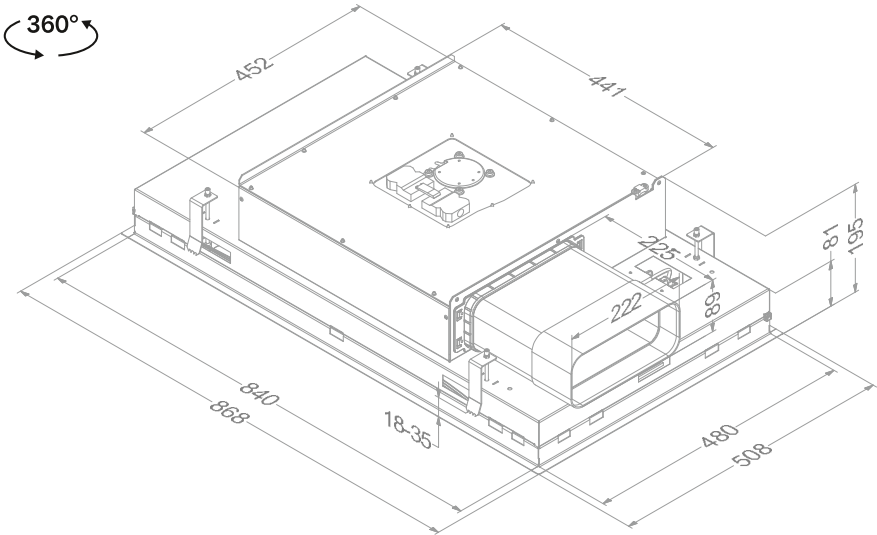

Pureline Pro Compact 120 cm

6820 / 6821 / 6822

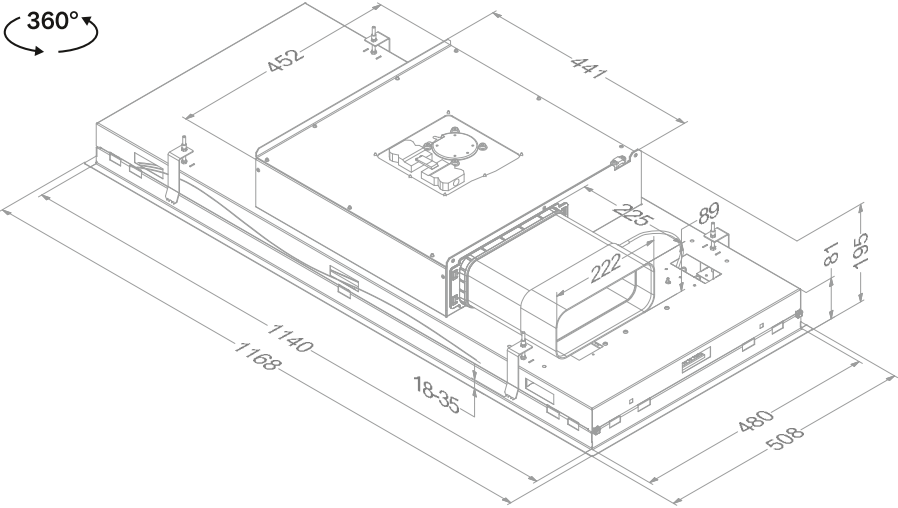

Accessories

	Reference	Price/pc	6910	6911	6912	6920	6921	6922
Miscellaneous								
Grease filter (replacement) (2 pcs to order)	6830.020	£ 49	▪	▪	▪	▪	▪	▪
Input / output module	990.036	£ 169	▪	▪	▪	▪	▪	▪
Flat flexible tube (89×222×750 mm)	906.408	£ 69	▪	▪	▪	▪	▪	▪





Accessories

	Reference	Price/pc	6910	6911	6912	6920	6921	6922
Recirculation								
Low built-in box (140 mm high) with monoblock filter (140×820×292 mm)								
White (≈RAL 9003)	7931.400	£ 399	▪	▪	▪	▪	▪	▪
Black (≈RAL 9005)	7932.400	£ 399	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	7933.400	£ 399	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£ 129	▪	▪	▪	▪	▪	▪
Exhaust box with monoblock filter (270×500×295 mm)								
White (≈RAL 9003)	841.400	£ 399	▪	▪	▪	▪	▪	▪
Black (≈RAL 9005)	842.400	£ 399	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	843.400	£ 399	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£ 137	▪	▪	▪	▪	▪	▪





Pureline Compact

- A built-in height of only 19.5 cm thanks to a compact motor
- Flexible installation possibilities due to rotating motor in several directions (left, right, front or rear)
- Maximum efficiency yet extremely quiet
- LED lighting warm white (2,700 K) adjustable to neutral white (4,000 K)
- Integrated dimmable LED lighting



Premium
Product distributed through a selection of partners.



Distance
Maximum distance between cooker hood and hob.



InTouch
Function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated, compact motor	Stainless steel	B	650	38	59	6810	£ 1,699
	Integrated, compact motor	White	B	650	38	59	6811	£ 1,699
	Integrated, compact motor	Black	B	650	38	59	6812	£ 1,699
120	Integrated, compact motor	Stainless steel	B	651	38	59	6820	£ 1,899
	Integrated, compact motor	White	B	651	38	59	6821	£ 1,899
	Integrated, compact motor	Black	B	651	38	59	6822	£ 1,899

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical specifications



Pureline Compact 90 cm
6810 stainless steel / 6811 white / 6812 black



Pureline Compact 120 cm
6820 stainless steel / 6821 white / 6822 black

Functions

Controls	Buttons + remote control	Buttons + remote control
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting

Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700 or 4,000	2,700 or 4,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)

Technical characteristics

Colour	6810 stainless steel 6811 white (≈RAL 9003) 6812 black (≈RAL 9005)	6820 stainless steel 6821 white (≈RAL 9003) 6822 black (≈RAL 9005)
Integrated motor	▪ (not removable)	▪ (not removable)
Weight cooker hood / motor casing (kg)	27.8	30.8
Mains voltage (V) / Electrical connection value (W)	230 / 171	230 / 171

Dimensions

Dimensions (W×D×H) (mm)	868×508×195	1 168×508×195
Opening (L×W) (mm)	845×485	1 145×485
Exhaust opening diameter (mm)	89×222	89×222
Exhaust position	Right / left / front / rear	Right / left / front / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600

Air quantity and sound level


Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6810, 6811, 6812	Integrated motor	750	244 / 40	443 / 142	581 / 266	650 / 483	27 / 38	40 / 52	47 / 59	51 / 63
6820, 6821, 6822	Integrated motor	750	240 / 40	444 / 140	582 / 265	651 / 484	27 / 38	40 / 52	47 / 59	51 / 63

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings


Pureline Compact 90 cm

6810 / 6811 / 6812

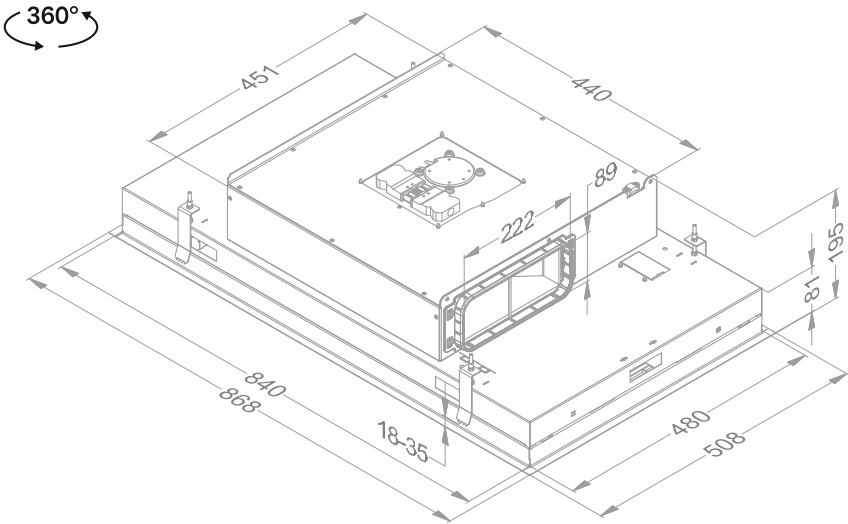

Pureline Compact 120 cm

6820 / 6821 / 6822

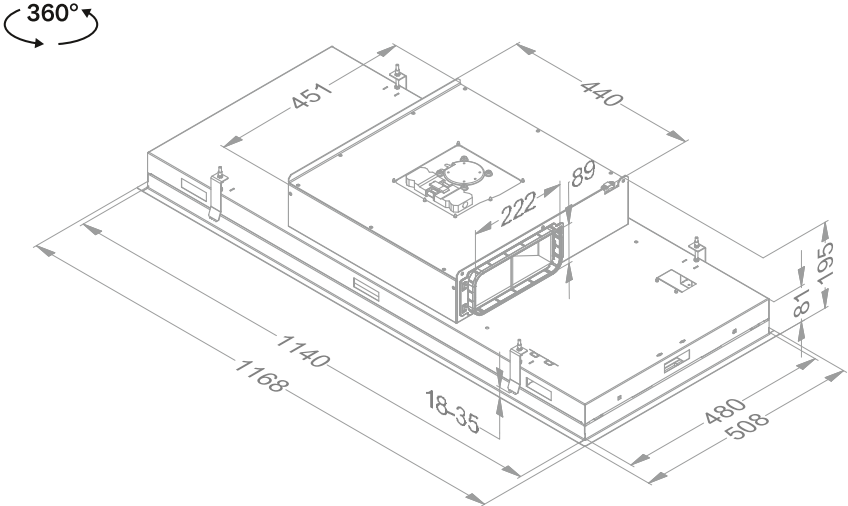

Accessories


	Reference	Price/pc	6810	6811	6812	6820	6821	6822
Miscellaneous								
Grease filter (replacement) (2 pcs to order)	6830.020	£ 49	•	•	•	•	•	•
Kit connection with external cover and/or lighting	990.030	£ 134	•	•	•	•	•	•
Flat flexible tube (89×222×750 mm)	906.408	£ 69	•	•	•	•	•	•



Accessories

	Reference	Price/pc	6810	6811	6812	6820	6821	6822
Recirculation								
Low built-in box (140 mm high) with monoblock filter (140×820×292 mm)								
White (≈RAL 9003)	7931.400	£ 399	▪	▪	▪	▪	▪	▪
Black (≈RAL 9005)	7932.400	£ 399	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	7933.400	£ 399	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£ 129	▪	▪	▪	▪	▪	▪
Exhaust box with monoblock filter (270×500×295 mm)								
White (≈RAL 9003)	841.400	£ 399	▪	▪	▪	▪	▪	▪
Black (≈RAL 9005)	842.400	£ 399	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	843.400	£ 399	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£ 137	▪	▪	▪	▪	▪	▪



CEILING
UNITS

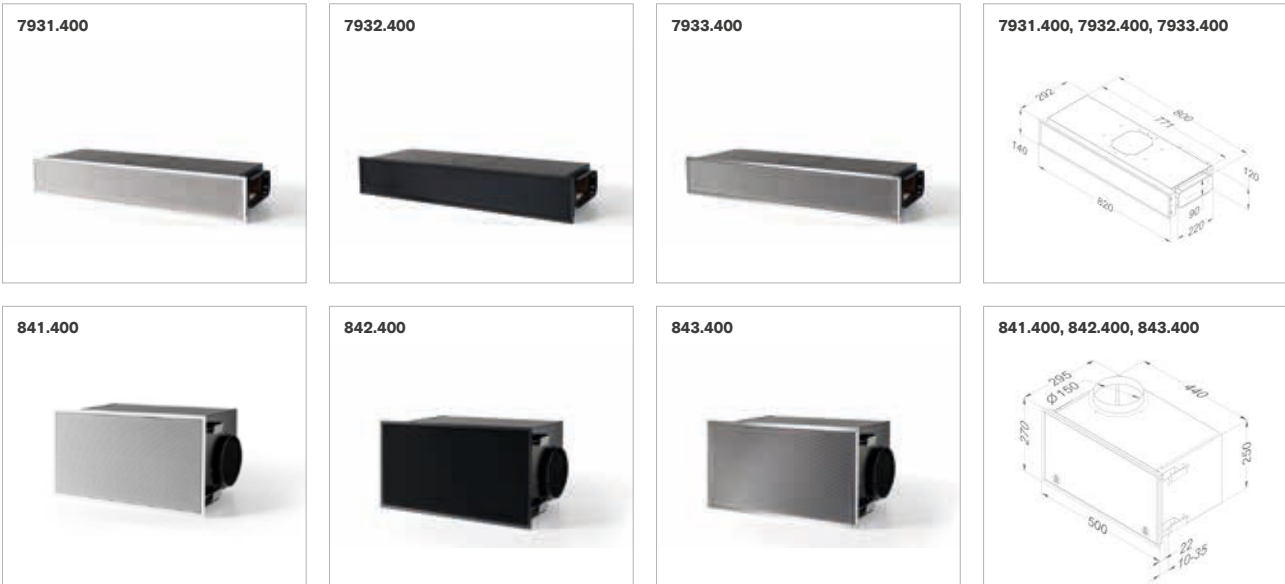



Pureline Pro

- Maximum efficiency yet extremely quiet
- LED lighting warm white (2,700 K) adjustable to neutral white (5,000 K)
- Ultra slim led strip with extensive lighting function for the right amount of light and atmosphere during and after cooking (cooking mode and ambient mode)
- Automatic speed control with the Novy Sense sensor for detection of cooking vapours and odour
- Cubic motor; rotatable in all directions and dismountable for remote installation indoors
- Operation and settings possible via smartphone or tablet, as well via remote control or controls on the cooker hood

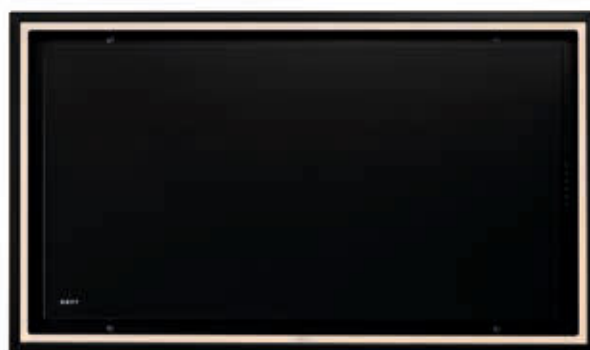

Premium
Product distributed through a selection of partners.



InTouch
Function for controlling the cooker hood from the hob.



Distance
Maximum distance between cooker hood and hob.



Novy Connect
Operation and settings possible via smartphone or tablet



Optional



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated, cubic motor or remotely inside	Stainless steel	A	713	39	59	6930	£ 2,099
	Integrated, cubic motor or remotely inside	White	A	713	39	59	6931	£ 2,099
	Integrated, cubic motor or remotely inside	Black	A	713	39	59	6932	£ 2,099
120	Integrated, cubic motor or remotely inside	Stainless steel	A	714	39	59	6940	£ 2,299
	Integrated, cubic motor or remotely inside	White	A	714	39	59	6941	£ 2,299
	Integrated, cubic motor or remotely inside	Black	A	714	39	59	6942	£ 2,299

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video

Pureline Pro Teaser video



Technical specifications



Pureline Pro 90 cm
6930 stainless steel / 6931 white / 6932 black



Pureline Pro 120 cm
6940 stainless steel / 6941 white / 6942 black

Functions

Controls	Buttons + remote control + Novy Connect	Buttons + remote control + Novy Connect
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
Automatic speed control via Novy Connect	▪	▪
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting

Type of lighting (W)	LED (24) / dimmable	LED (24) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour ambient mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)	Default setting 2,700 (adjustable between 2,700 and 5,000)

Technical characteristics

Colour	6930 stainless steel 6931 white (≈RAL 9003) 6932 black (≈RAL 9005)	6940 stainless steel 6941 white (≈RAL 9003) 6942 black (≈RAL 9005)
Integrated motor	▪	▪
Possibility to remotely place the motor indoors	▪	▪
Weight cooker hood / motor casing (kg)	23 / 6	26 / 6
Mains voltage (V) / Electrical connection value (W)	230 / 198	230 / 193

Dimensions

Dimensions (W×D×H) (mm)	868×508×319	1168×508×319
Height of ceiling unit incl. mounting clamps (without the motor box) (mm)	133	133
Opening (L×W) (mm)	845×485	1145×485
Exhaust opening diameter (mm)	150	150
Exhaust position	Top / right / left / front / rear	Top / right / left / front / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600



Air quantity and sound level

Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6930, 6931, 6932	Integrated motor	975	275 / 123	470 / 349	616 / 383	713 / 385	27 / 39	40 / 52	46 / 59	49 / 62
6940, 6941, 6942	Integrated motor	975	262 / 98	466 / 343	617 / 391	714 / 391	27 / 39	40 / 52	46 / 59	49 / 62

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.




CEILING
UNITS

Technical drawings


Pureline Pro 90 cm

6930 / 6931 / 6932

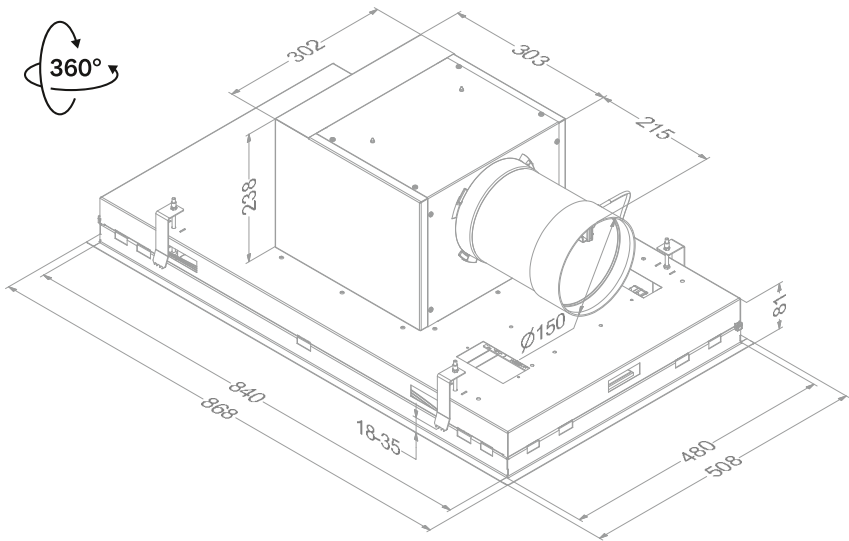

Pureline Pro 120 cm

6940 / 6941 / 6942

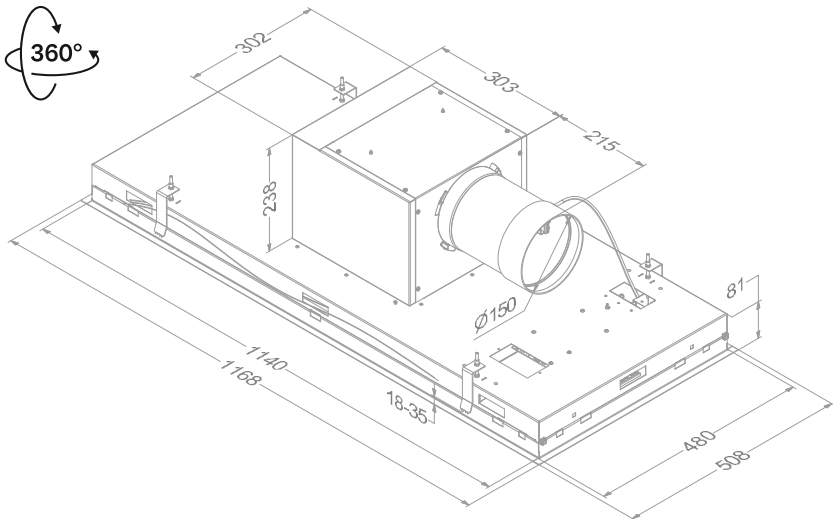

Accessories


	Reference	Price/pc	6930	6931	6932	6940	6941	6942
Miscellaneous								
Grease filter (replacement) (2 pcs to order)	6830.020	£ 49	•	•	•	•	•	•
Adapter to connect a flat duct (exhaust direction right, left, front, behind)	6930.050	£ 219	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.094	£ 35	•	•	•	•	•	•
Input / output module	990.036	£ 169	•	•	•	•	•	•





Accessories

	Reference	Price/pc	6930	6931	6932	6940	6941	6942
Recirculation								
Low built-in box (140 mm high) with monoblock filter (140×820×292 mm)								
White (≈RAL 9003)	7931.400	£ 399	▪	▪	▪	▪	▪	▪
Black (≈RAL 9005)	7932.400	£ 399	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	7933.400	£ 399	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£ 129	▪	▪	▪	▪	▪	▪
Exhaust box with monoblock filter (270×500×295 mm)								
White (≈RAL 9003)	841.400	£ 399	▪	▪	▪	▪	▪	▪
Black (≈RAL 9005)	842.400	£ 399	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	843.400	£ 399	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£ 137	▪	▪	▪	▪	▪	▪







Pureline with lighting

- Maximum efficiency yet extremely quiet
- LED lighting warm white (2,700 K) adjustable to neutral white (5,000 K)
- Integrated dimmable LED lighting
- Flexible installation thanks to models
 - With a Cubic motor; which can be rotated in all directions and is removable
 - Without a motor; for use with an external motor



InTouch
Function for controlling the cooker hood from the hob.



Distance
Maximum distance between cooker hood and hob.



Motor housing
Rotating motor housing that can be installed remotely.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated Cubic motor or remote inside	Stainless steel	A+	634	34	55	6830	£ 1,699
	Integrated Cubic motor or remote inside	White	A+	634	34	55	6831	£ 1,699
	Not included ⁽¹⁾	Stainless steel		(1)	(1)	(1)	6835	£ 1,299
	Not included ⁽¹⁾	White		(1)	(1)	(1)	6836	£ 1,299
120	Integrated Cubic motor or remote inside	Stainless steel	A+	615	35	55	6840	£ 1,899
	Integrated Cubic motor or remote inside	White	A+	615	35	55	6841	£ 1,899
	Not included ⁽¹⁾	Stainless steel		(1)	(1)	(1)	6845	£ 1,799
	Not included ⁽¹⁾	White		(1)	(1)	(1)	6846	£ 1,799

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to a wall motor or roof motor (see accessories).

Technical specifications



**Pureline 90 cm
6830 stainless steel /
6831 white**



**Pureline 90 cm
6835 stainless steel /
6836 white
Motor not included**



**Pureline 120 cm
6840 stainless steel /
6841 white**



**Pureline 120 cm
6845 stainless steel /
6846 white
Motor not included**

Functions

Controls	Buttons + remote control	Buttons + remote control	Buttons + remote control	Buttons + remote control
Number of speed settings	3 + power function	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6	6
With noise reduction	▪		▪	
Recirculation	Optional (monoblock)		Optional (monoblock)	
InTouch function for hobs	▪	▪	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪	▪
Run-on timer (min.)	10	10	10	10
Cleaning indicator for grease filter	▪	▪	▪	▪
Replacement indicator for recirculation filter	▪		▪	

Lighting

Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700 or 4,000	2,700 or 4,000	2,700 or 4,000	2,700 or 4,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)	Optional (kit 990.030)	Optional (kit 990.030)

Technical characteristics

Colour	6830 stainless steel 6831 white (≈RAL 9003)	6835 stainless steel 6836 white (≈RAL 9003)	6840 stainless steel 6841 white (≈RAL 9003)	6845 stainless steel 6846 white (≈RAL 9003)
Integrated motor	▪		▪	
Option to install the remote motor inside	▪		▪	
Motor not included (suitable for wall motor, flat roof motor outside)		▪ (1)		▪ (1)
Weight cooker hood / motor casing (kg)	21.5 / 6	16.5 + motor	24.5 / 6	19.5 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 117	230 / 13 + motor	230 / 118	230 / 13 + motor

Dimensions

Dimensions (W×D×H) (mm)	868×508×319	868×508×81	1168×508×319	1168×508×81
Height of ceiling unit including mounting clamps (without the motor box) (mm)	133	133	133	133
Opening (L×W) (mm)	845×485	845×485	1145×485	1145×485
Exhaust opening diameter (mm)	150	150	150	150
Exhaust position	Top / right / left / front / rear	Top	Top / right / left / front / rear	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600	650–1600	650–1600

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.



Air quantity and sound level

Ref.		Maximum flow rate (m ³ /h)	Air quantity (m ³ /h) / pressure (Pa)				Noise level dB(A) sound pressure (re 20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6830, 6831	Integrated motor	815	234 / 66	416 / 238	549 / 381	634 / 379	22 / 34	35 / 48	42 / 55	46 / 59
6835, 6836	Not included	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
6840, 6841	Integrated motor	815	246 / 84	407 / 251	535 / 382	615 / 384	24 / 35	35 / 47	42 / 55	46 / 58
6845, 6846	Not included	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



CEILING
UNITS

Technical drawings

Pureline 90 cm

6830 / 6831



6835 / 6836

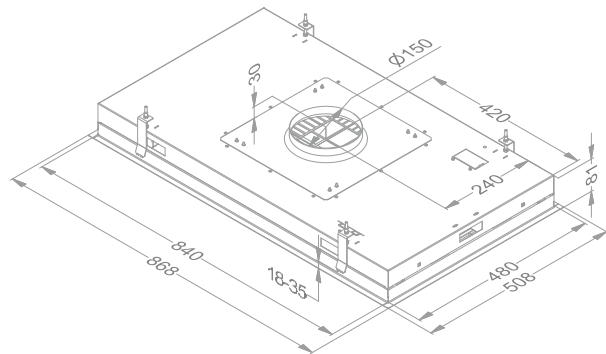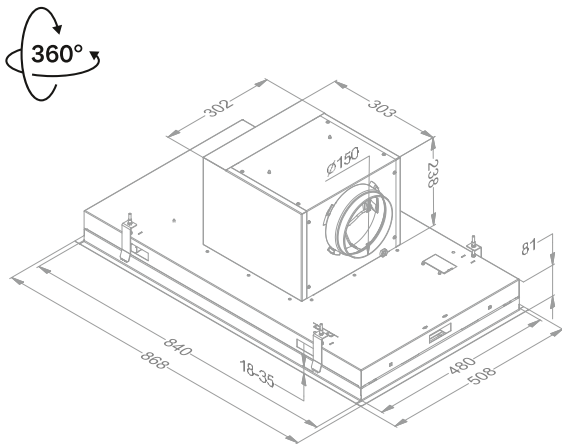

Pureline 120 cm

6840 / 6841

6845 / 6846

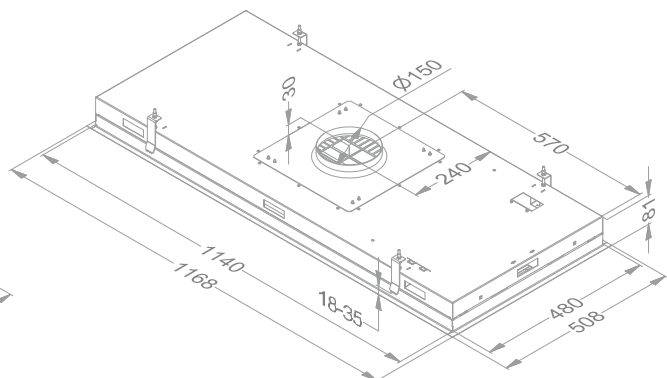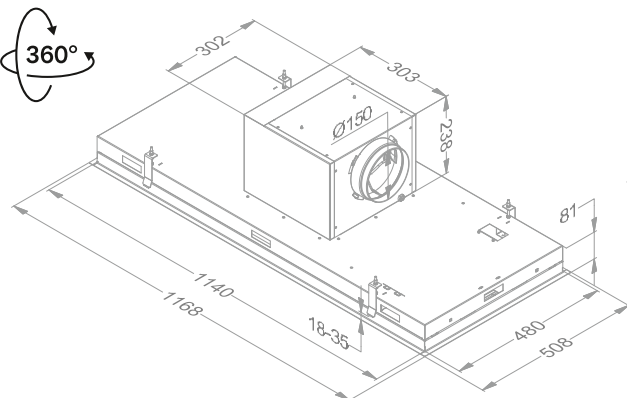

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.


Accessories

	Reference	Price/pc	6830	6831	6835	6836	6840	6841	6845	6846
Motor at a distance										
Wall motor, minimum 5 m between cooker hood and motor	445.999	£ 879			•	•			•	•
Roof motor 48.8 cm height	745.999	£ 1,479			•	•			•	•
Roof motor with noise reduction 78.4 cm height	755.999	£ 1,699			•	•			•	•
Technical details motors see p. 216-217										
Miscellaneous										
Grease filter (replacement) (2 pcs to order)	6830.020	£ 49	•	•	•	•	•	•	•	•
Adapter to connect a flat duct (exhaust direction right, left, front, behind)	6830.053	£ 130	•	•	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£ 35			•	•			•	•
Extension cable for remote motors (5 m)	7000.094	£ 35	•	•			•	•		
Monoblock filter (without exhaust box) (also replacement)	990.030	£ 134	•	•	•	•	•	•	•	•

445.999




445.999



745.999




745.999



755.999




755.999



6830.053



6830.053



990.030



6830.020





Accessories

	Reference	Price/pc	6830	6831	6835	6836	6840	6841	6845	6846
Recirculation										
Exhaust box with monoblock filter (270×500×295 mm)										
White (≈RAL 9003)	841.400	£ 399	▪	▪			▪	▪		
Black (≈RAL 9005)	842.400	£ 399	▪	▪			▪	▪		
Grey (≈RAL 7030)	843.400	£ 399	▪	▪			▪	▪		
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£ 137	▪	▪			▪	▪		
Low built-in box (140 mm high) with monoblock filter (140×820×292 mm)										
White (≈RAL 9003)	7931.400	£ 399	▪	▪			▪	▪		
Black (≈RAL 9005)	7932.400	£ 399	▪	▪			▪	▪		
Grey (≈RAL 7030)	7933.400	£ 399	▪	▪			▪	▪		
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£ 129	▪	▪			▪	▪		
Monoblock filter (without exhaust box) (also replacement)	6830.060	£ 159	▪	▪			▪	▪		





Pureline without lighting

- Maximum efficiency yet extremely quiet
- Flexible installation thanks to models
 - With a Cubic motor; which can be rotated in all directions and is removable
 - Without a motor; for use with an external motor
- No lighting, to suit your own lighting plan
- External lighting can be connected through the cooker hood and controlled via the cooker hood and/or remote control



InTouch

Function for controlling the cooker hood from the hob.



Distance

Maximum distance between cooker hood and hob.



Motor housing

Rotating motor housing that can be installed remotely.



Recirculation

Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m ³ /h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated Cubic motor / remote inside	Stainless steel	A++	624	35	55	6833	£ 1,699
	Integrated Cubic motor / remote inside	White	A++	624	35	55	6834	£ 1,699
	Not included ⁽¹⁾	Stainless steel		(1)	(1)	(1)	6838	£ 1,399
	Not included ⁽¹⁾	White		(1)	(1)	(1)	6839	£ 1,399
120	Integrated Cubic motor / remote inside	Stainless steel	A++	611	36	55	6843	£ 1,899
	Integrated Cubic motor / remote inside	White	A++	611	36	55	6844	£ 1,899
	Not included ⁽¹⁾	Stainless steel		(1)	(1)	(1)	6848	£ 1,699
	Not included ⁽¹⁾	White		(1)	(1)	(1)	6849	£ 1,699

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to a wall motor or roof motor (see accessories).

Technical specifications



**Pureline 90 cm
6833 stainless steel /
6834 white**



**Pureline 90 cm
6838 stainless steel /
6839 white
Motor not included**



**Pureline 120 cm
6843 stainless steel /
6844 white**



**Pureline 120 cm
6848 stainless steel /
6849 white
Motor not included**

Functions

Controls	Buttons + remote control	Buttons + remote control	Buttons + remote control	Buttons + remote control
Number of speed settings	3 + power function	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6	6
With noise reduction	▪		▪	
Recirculation	Optional (monoblock)		Optional (monoblock)	
InTouch function for hobs	▪	▪	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪	▪
Run-on timer (min.)	10	10	10	10
Cleaning indicator for grease filter	▪	▪	▪	▪
Replacement indicator for recirculation filter	▪		▪	

Lighting

External lighting to connect and operate with remote control (W)	Max. 300 (or with relay > 300)	Max. 300 (or with relay > 300)	Max. 300 (or with relay > 300)	Max. 300 (or with relay > 300)
--	-----------------------------------	-----------------------------------	-----------------------------------	-----------------------------------

Technical characteristics

Colour	6833 stainless steel 6834 white (≈RAL 9003)	6838 stainless steel 6839 white (≈RAL 9003)	6843 stainless steel 6844 white (≈RAL 9003)	6848 stainless steel 6849 white (≈RAL 9003)
Integrated motor	▪		▪	
Option to install the remote motor inside	▪		▪	
Motor not included (suitable for wall motor, flat roof motor outside)		▪ ⁽¹⁾		▪ ⁽¹⁾
Weight cooker hood / motor casing (kg)	21.5 / 6	16.5 + motor	24.5 / 6	19.5 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 105	230 / 0 + motor	230 / 105	230 / 0 + motor

Dimensions

Dimensions (W×D×H) (mm)	868×508×319	868×508×81	1168×508×319	1168×508×81
Height of ceiling unit including mounting clamps (without the motor box) (mm)	133	133	133	133
Opening (L×W) (mm)	845×485	845×485	1145×485	1145×485
Exhaust opening diameter (mm)	150	150	150	150
Exhaust position	Top / right / left / front / rear	Top	Top / right / left / front / rear	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600	650–1600	650–1600

⁽¹⁾ These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.



Air quantity and sound level

Type		Maximum flow rate (m ³ /h)	Air quantity (m ³ /h) / pressure (Pa)				Noise level dB(A) sound pressure (re 20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6833, 6834	Integrated motor	815	256 / 86	417 / 235	549 / 382	624 / 382	24 / 35	35 / 47	42 / 55	46 / 58
6838, 6839	Not included	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
6843, 6844	Integrated motor	815	227 / 69	398 / 240	530 / 381	611 / 382	26 / 36	35 / 46	42 / 55	46 / 57
6848, 6849	Not included	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



CEILING
UNITS

Technical drawings

Pureline 90 cm

6833 / 6834



6838 / 6839

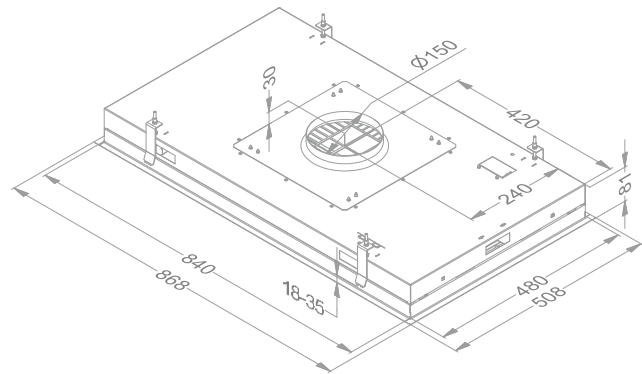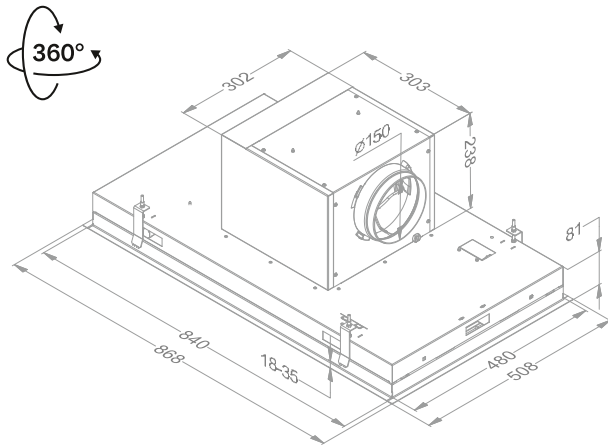

Pureline 120 cm

6843 / 6844

6848 / 6849

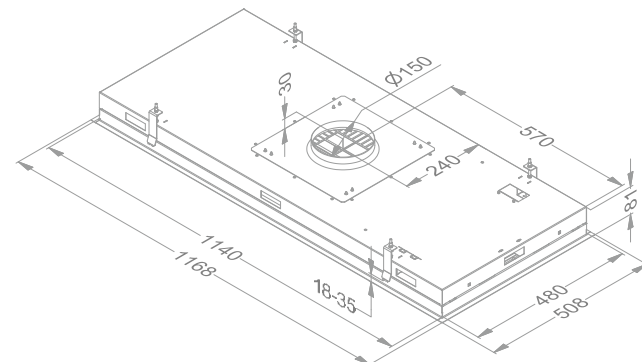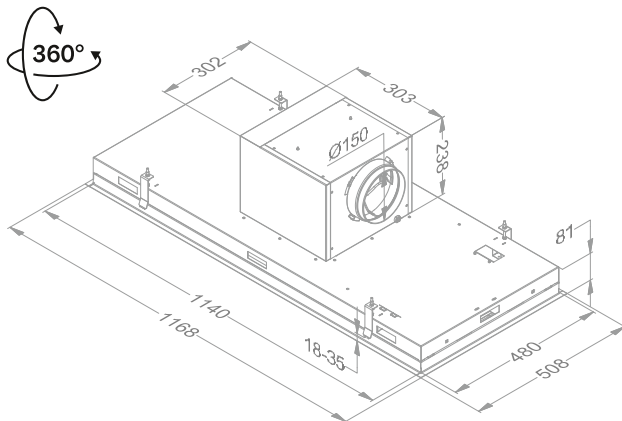

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.


Accessories

	Reference	Price/pc	6833	6834	6838	6839	6843	6844	6848	6849
Motor at a distance										
Wall motor, minimum 5 m between cooker hood and motor	445.999	£ 879			•	•			•	•
Roof motor 48.8 cm height	745.999	£ 1,479			•	•			•	•
Roof motor with noise reduction 78.4 cm height	755.999	£ 1,699			•	•			•	•
Technical details motors see p. 216-217										
Miscellaneous										
Grease filter (replacement) (2 pcs to order)	6830.020	£ 49	•	•	•	•	•	•	•	•
Adapter to connect a flat duct (exhaust direction right, left, front, behind)	6830.053	£ 130	•	•	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£ 35			•	•			•	•
Extension cable for remote motors (5 m)	7000.094	£ 35	•	•			•	•		
Kit connection with external cover and/or lighting	990.030	£ 134	•	•	•	•	•	•	•	•

445.999




445.999



745.999




745.999



755.999




755.999



6830.053



6830.053



990.030



6830.020





Accessories

	Reference	Price/pc	6833	6834	6838	6839	6843	6844	6848	6849
Recirculation										
Exhaust box with monoblock filter (270×500×295 mm)										
White (≈RAL 9003)	841.400	£ 399	▪	▪			▪	▪		
Black (≈RAL 9005)	842.400	£ 399	▪	▪			▪	▪		
Grey (≈RAL 7030)	843.400	£ 399	▪	▪			▪	▪		
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£ 137	▪	▪			▪	▪		
Low built-in box (140 mm high) with monoblock filter (140×820×292 mm)										
White (≈RAL 9003)	7931.400	£ 399	▪	▪			▪	▪		
Black (≈RAL 9005)	7932.400	£ 399	▪	▪			▪	▪		
Grey (≈RAL 7030)	7933.400	£ 399	▪	▪			▪	▪		
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£ 129	▪	▪			▪	▪		
Monoblock filter (without exhaust box) (also replacement)	6830.060	£ 159	▪	▪			▪	▪		







Maxi Pureline

- Extremely powerful
- Perfect for above an extra large cooking surface
- Industrial look
- No lighting, to suit your own lighting plan
- External lighting to be connected through the cooker hood and controlled via the cooker hood and/or remote control



CEILING
UNITS



InTouch
Function for controlling the
cooker hood from the hob.



Remote control
Supplied as standard with
Remote control.



Distance
Maximum distance
between cooker hood
and hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
				Minimum	Maximum		
150	Not included ⁽¹⁾	Stainless steel	⁽¹⁾	⁽¹⁾	⁽¹⁾	855	£ 2,099
	Not included ⁽¹⁾	White	⁽¹⁾	⁽¹⁾	⁽¹⁾	856	£ 2,099

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to 2 internal motors, wall motors or flat roof motors (see accessories).



Technical specifications



Maxi Pureline
855 stainless steel / 856 white

Functions

Controls	Buttons + remote control
Number of speed settings	3 + power function
Power setting with automatic downshift (min.)	6
Recirculation	Optional (in combination with 2 inside motors 245.999)
InTouch function for hobs	▪
Auto-Stop, automatic switch-off after 3 hours	▪
Run-on timer (min.)	10
Cleaning indicator for grease filter	▪
Replacement indicator for recirculation filter	▪

Lighting

External lighting to connect and operate with remote control (optional) (W)	Max. 300 (or with relay > 300)
---	--------------------------------

Technical characteristics

Colour	855 stainless steel 856 white (≈RAL 9003)
Motor not included (suitable for remote motor inside, wall motor or flat roof motor outside)	▪ ⁽¹⁾
Weight cooker hood / motor casing (kg)	35 + motors
Mains voltage (V) / Electrical connection value (W)	230 / 0 + motors

Dimensions (mm)


Dimensions (W×D×H) (mm)	1460×670×90
Height of ceiling unit including mounting clamps (without the motor box) (mm)	133
Opening (L×W) (mm)	1438×648
Exhaust opening diameter (mm)	2×150
Exhaust position	2×top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600
Recommended installation height with an electric or ceramic cooker(Hmin–Hmax) (mm)	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600

Air quantity and sound level

Type	Maximum free flow rate (m ³ /h)	Air quantity (m ³ /h) / pressure (Pa)				Noise level dB(A) sound pressure (re20μPa) / sound power (re 1 pW)			
		Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
855–856	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾

⁽¹⁾ This cooker hood should be connected to 2x remote motor inside, 2x wall motor or 2x roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.

Technical drawings

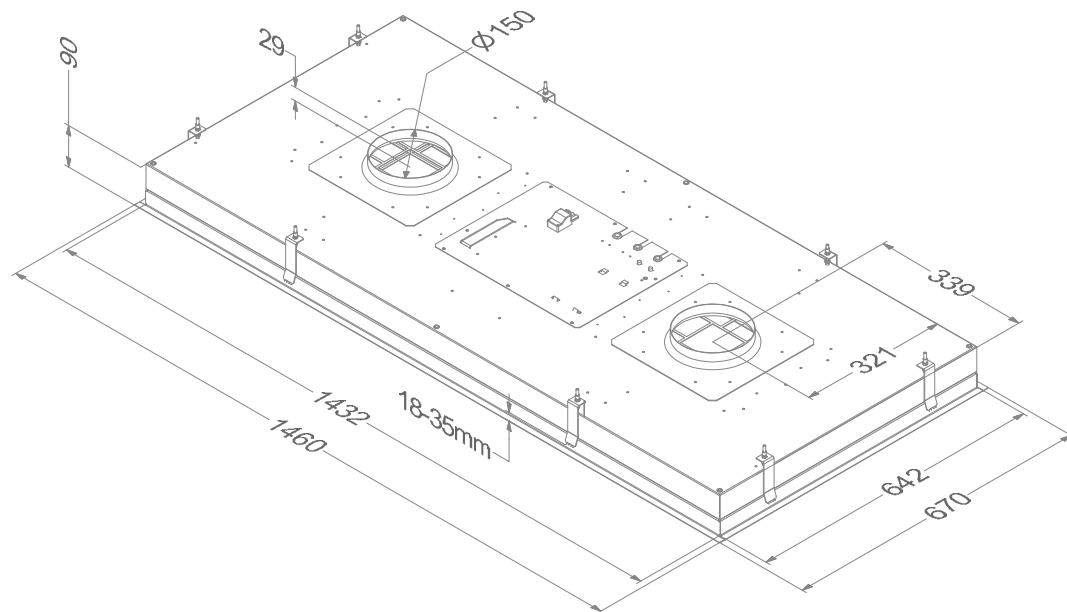


Accessories

	Reference	Price/pc	855	856
Motor at a distance				
Remote motor for inside (2 pcs to order)	245.999	£ 539	•	•
Wall motor, minimum 5 m between cooker hood and motor (2 pcs to order)	445.999	£ 879	•	•
Roof motor 48.8 cm height (2 pcs to order)	745.999	£ 1,479	•	•
Roof motor with noise reduction 78.4 cm height (2 pcs to order)	755.999	£ 1,699	•	•
Technical details motors p. 198-199				
Miscellaneous				
Grease filter (replacement) (2 pcs to order)	7400.020	£ 79	•	•
Adapter to connect a flat duct (exhaust direction 1x left, 1x right) (2 pcs to order)	830.053	£ 130	•	•
Extension cable for remote motors (5 m) (2 pcs to order)	7000.092	£ 35	•	•

245.999




245.999



445.999




445.999



745.999




745.999



755.999




755.999



830.053



830.053





Accessories

	Reference	Price/pc	855	856
Recirculation				
Exhaust box with monoblock filter (270×500×295 mm)				
White (≈RAL 9003) (2 pcs to order)	841.400	£ 399	▪	▪
Black (≈RAL 9005) (2 pcs to order)	842.400	£ 399	▪	▪
Grey (≈RAL 7030) (2 pcs to order)	843.400	£ 399	▪	▪
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£ 137	▪	▪
Low built-in box (140 mm high) with monoblock filter (140×820×292 mm)				
White (≈RAL 9003) (2 pcs to order)	7931.400	£ 399	▪	▪
Black (≈RAL 9005) (2 pcs to order)	7932.400	£ 399	▪	▪
Grey (≈RAL 7030) (2 pcs to order)	7933.400	£ 399	▪	▪
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£ 129	▪	▪
Kit with monoblock filters (without exhaust box)	850.400	£ 304	▪	▪
Monoblock replacement filter for 850.400 (2 pcs to order)	7300.055	£ 139	▪	▪






Built-in cooker hoods

for deep cabinets

Mini Pureline

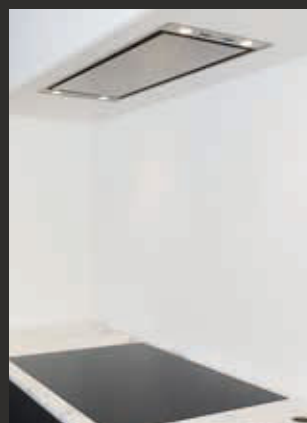

Width of cabinet or canopy

60 cm



90 cm



Colour

White



Stainless steel



Black



Motor

Integrated



At a distance (inside)

Optional

Exhaust

To the outside



Recirculation

Optional

Crystal

Glas built-in unit

Stainless steel Essence



p. 124

p. 130

p. 136



**BUILT-IN
COOKER
HOODS**



**BUILT-
UNDER
COOKER
HOODS**



WALL-MOUNTED COOKER HOODS



ISLAND COOKER HOODS



**COOKER
HOOD
ACCESSORY**



HOBBS



INFO





Mini Pureline

- Integrated in a decorative chimney or alcove
- Flexible installation of the Cubic motor for more placement options
- Integrated dimmable LED lighting
- LED lighting warm white (2,700 K) adjustable to neutral white (4,000 K)



InTouch
Function for controlling the cooker hood from the hob.



Remote control
Supplied as standard with Remote control.



Motor housing
Rotating motor housing that can be installed remotely.



Recirculation
Recirculation is optional.



810
811
816



820
821
826



BUILT-IN
COOKER
HOODS

Width (cm)	Motor	Colour	EEL	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated Cubic motor / remote inside ⁽²⁾	Stainless steel	A	534	37	54	810	£ 1,199
	Integrated Cubic motor / remote inside ⁽²⁾	White	A	534	37	54	811	£ 1,199
	Integrated Cubic motor / remote inside ⁽²⁾	Black	A	534	37	54	816	£ 1,199
90	Integrated Cubic motor / remote inside ⁽²⁾	Stainless steel	A+	601	37	52	820	£ 1,299
	Integrated Cubic motor / remote inside ⁽²⁾	White	A+	601	37	52	821	£ 1,299
	Integrated Cubic motor / remote inside ⁽²⁾	Black	A+	601	37	52	826	£ 1,399

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(2) To install the motor remotely, you should order an additional accessory (see accessories).



Technical specifications



Mini Pureline
810 stainless steel / 811 white /
816 black



Mini Pureline
820 stainless steel / 821 white /
826 black

Functions

Controls	Buttons + remote control	Buttons + remote control
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting

Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700 or 4,000	2,700 or 4,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)

Technical characteristics

Colour	810 stainless steel 811 white (≈RAL 9003) 816 black (≈RAL 9005)	820 stainless steel 821 white (≈RAL 9003) 826 black (≈RAL 9005)
Integrated motor	▪	▪
Option to install the remote motor inside	Optional	Optional
Weight cooker hood / motor casing (kg)	10 / 5	12 / 5
Mains voltage (V) / Electrical connection value (W)	230 / 118	230 / 121

Dimensions

Dimensions (W×D×H) (mm)	560×301×330	860×301×330
Opening (L×W) (mm)	545×286	845×286
Exhaust opening diameter (mm)	150	150
Exhaust position	Top / front / left / right / rear	Top / front / left / right / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–850



Air quantity and sound level


Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
810, 811, 816	Integrated motor	815	205 / 79	333 / 219	399 / 322	534 / 370	26 / 37	37 / 49	42 / 54	49 / 61
820, 821, 826	Integrated motor	815	237 / 79	379 / 225	451 / 329	601 / 372	26 / 37	36 / 48	40 / 52	47 / 59

Noise levels measured in accordance with IEC 60704-2-13 standards, fl ow rates according to IEC 61591.

Technical drawings

Mini Pureline 60 cm


810 / 811 / 816

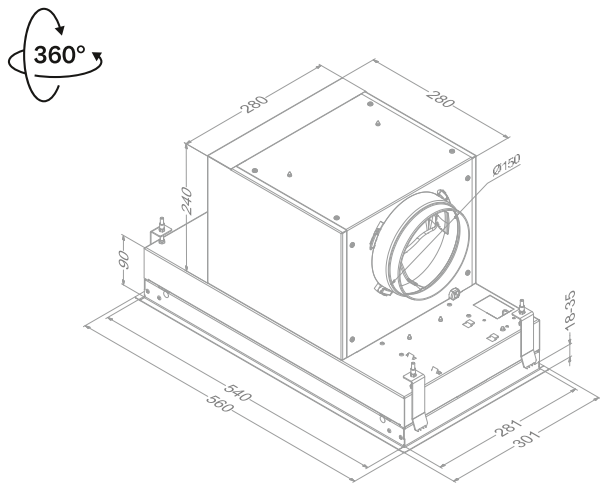

BUILT-IN
COOKER
HOODS

Mini Pureline 90 cm

820 / 821 / 826

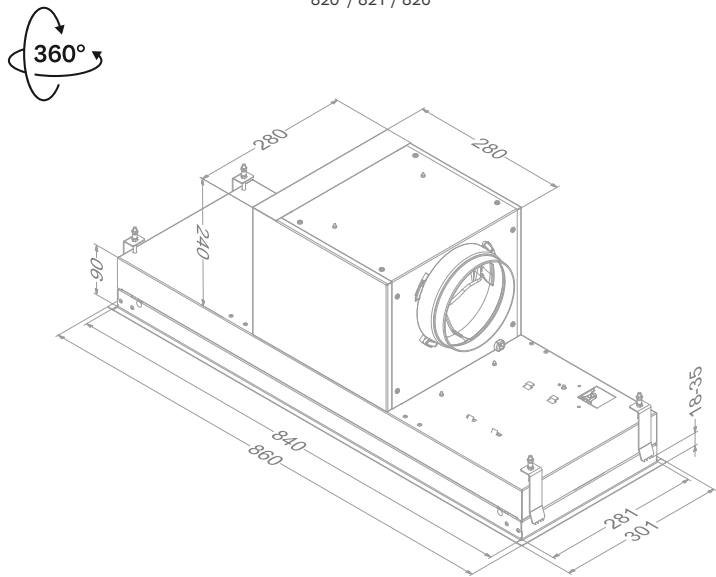



Accessories

	Reference	Price/pc	810	811	816	820	821	826
Miscellaneous								
Grease filter (replacement)	609.014	£ 49	•	•	•			
Grease filter (replacement)	7400.020	£ 79				•	•	•
Kit to install the remote motor	800.996	£ 90				•	•	•
Adapter to connect a flat duct	830.053	£ 130				•	•	•
Extension cable for remote motors (5 m)	7000.096	£ 35	•	•	•	•	•	•
Kit connection with external cover and/or lighting	990.030	£ 134	•	•	•	•	•	•

609.014



7400.020



800.996



830.052




830.052



990.030



990.030






Accessories

	Reference	Price/pc	810	811	816	820	821	826
Recirculation								
Exhaust box with monoblock filter (270×500×295 mm)								
White (≈RAL 9003)	841.400	£ 399	▪	▪	▪	▪	▪	▪
Black (≈RAL 9005)	842.400	£ 399	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	843.400	£ 399	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£ 137	▪	▪	▪	▪	▪	▪
Low built-in box (140 mm high) with monoblock filter (140×820×292 mm)								
White (≈RAL 9003)	7931.400	£ 399	▪	▪	▪	▪	▪	▪
Black (≈RAL 9005)	7932.400	£ 399	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	7933.400	£ 399	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£ 129	▪	▪	▪	▪	▪	▪
Monoblock filter (without exhaust box) (also replacement)	811.400	£ 130	▪	▪	▪			
Kit with monoblock filters (without exhaust box)	820.400	£ 152				▪	▪	▪
Monoblock replacement filter for recirculation kit 820.400	7300.055	£ 139				▪	▪	▪



BUILT-IN
COOKER
HOODS





Crystal

- Integrated in a decorative chimney or alcove
- Integrated dimmable LED lighting (3,000 K)
- Discreetly finished in white or black glass

**InTouch**

Function for controlling the cooker hood from the hob.

**Remote control**

Supplied as standard with Remote control.

**Recirculation**

Recirculation is optional.



BUILT-IN
COOKER
HOODS

Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated Cubic motor	White glass	B	600	39	52	26050	£ 799
	Integrated Cubic motor	Black glass	B	600	39	52	26052	£ 799
90	Integrated Cubic motor	White glass	B	592	40	51	26080	£ 999
	Integrated Cubic motor	Black glass	B	592	40	51	26082	£ 999

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Built-in / **Crystal**

Technical specifications



Crystal 60 cm
26050 white glass /
26052 black glass



Crystal 90 cm
26080 white glass /
26082 black glass

Functions

Controls	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting

Type of lighting (W)	LED (7) / dimmable	LED (14) / dimmable
Lighting colour (K)	3,000	3,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)

Technical characteristics

Colour	26050 white glass 26052 black glass	26080 white glass 26082 black glass
Integrated motor	▪	▪
Option to install the remote motor inside	Optional	Optional
Weight cooker hood (kg)	12,5	15
Mains voltage (V) / Electrical connection value (W)	230 / 231	230 / 238

Dimensions

Dimensions (W×D×H) (mm)	533×313×331	833×313×331
Opening (L×W) (mm)	510×290	810×290
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750



Air quantity and sound level


Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
26050, 26052	Integrated motor	700	207 / 443	282 / 491	386 / 525	600 / 564	27 / 39	33 / 45	40 / 52	50 / 61
26080, 26082	Integrated motor	700	207 / 447	276 / 489	371 / 526	592 / 559	28 / 40	33 / 45	39 / 51	49 / 61

Noise levels measured in accordance with IEC 60704-2-13 standards, fl ow rates according to IEC 61591.

Technical drawings

Crystal 60 cm


26050 / 26052

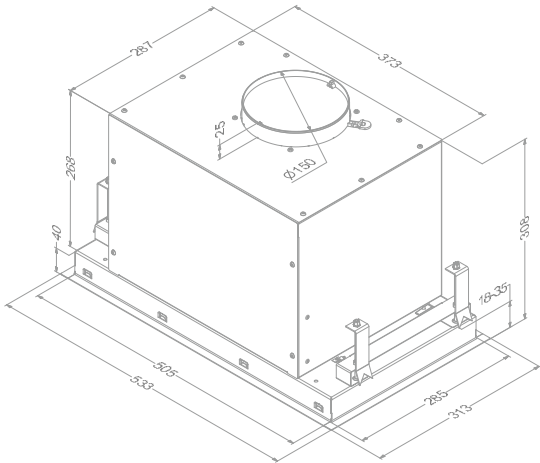

BUILT-IN
COOKER
HOODS

Crystal 90 cm


26080 / 26082

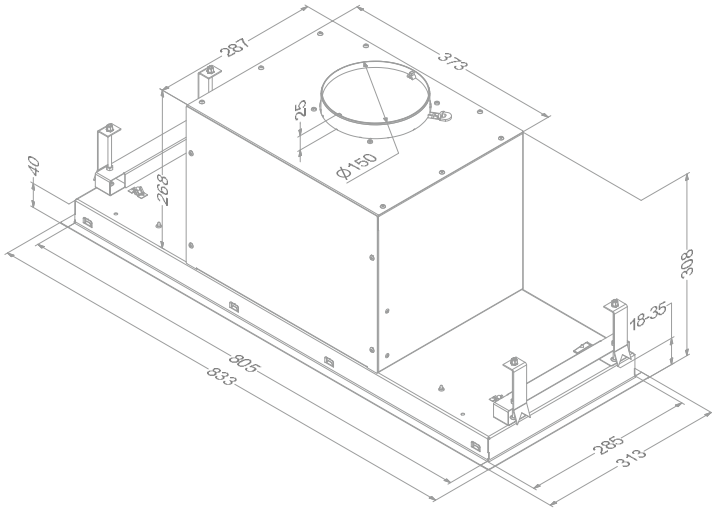


Accessories

	Reference	Price/pc	26050	26052	26080	26082
Miscellaneous						
Grease filter (replacement)	26050.020	£ 59	▪	▪	▪	▪
Kit connection with external cover and/or lighting	990.030	£ 134	▪	▪	▪	▪
Remote control	840.029	£ 80	▪	▪	▪	▪


990.030



990.030

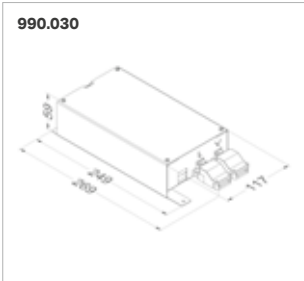

840.029








Accessories

	Reference	Price/pc	26050	26052	26080	26082
Recirculation						
Exhaust box with monoblock filter (270×500×295 mm)						
White (≈RAL 9003)	841.400	£ 399	•	•	•	•
Black (≈RAL 9005)	842.400	£ 399	•	•	•	•
Grey (≈RAL 7030)	843.400	£ 399	•	•	•	•
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£ 137	•	•	•	•
Low built-in box (140 mm high) with monoblock filter (140×820×292 mm)						
White (≈RAL 9003)	7931.400	£ 399	•	•	•	•
Black (≈RAL 9005)	7932.400	£ 399	•	•	•	•
Grey (≈RAL 7030)	7933.400	£ 399	•	•	•	•
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£ 129	•	•	•	•
Kit with monoblock filters (without exhaust box)	26050.400	£ 152	•	•	•	•
Monoblock replacement filter for recirculation kit 26050.400	26050.055	£ 139	•	•	•	•



BUILT-IN
COOKER
HOODS

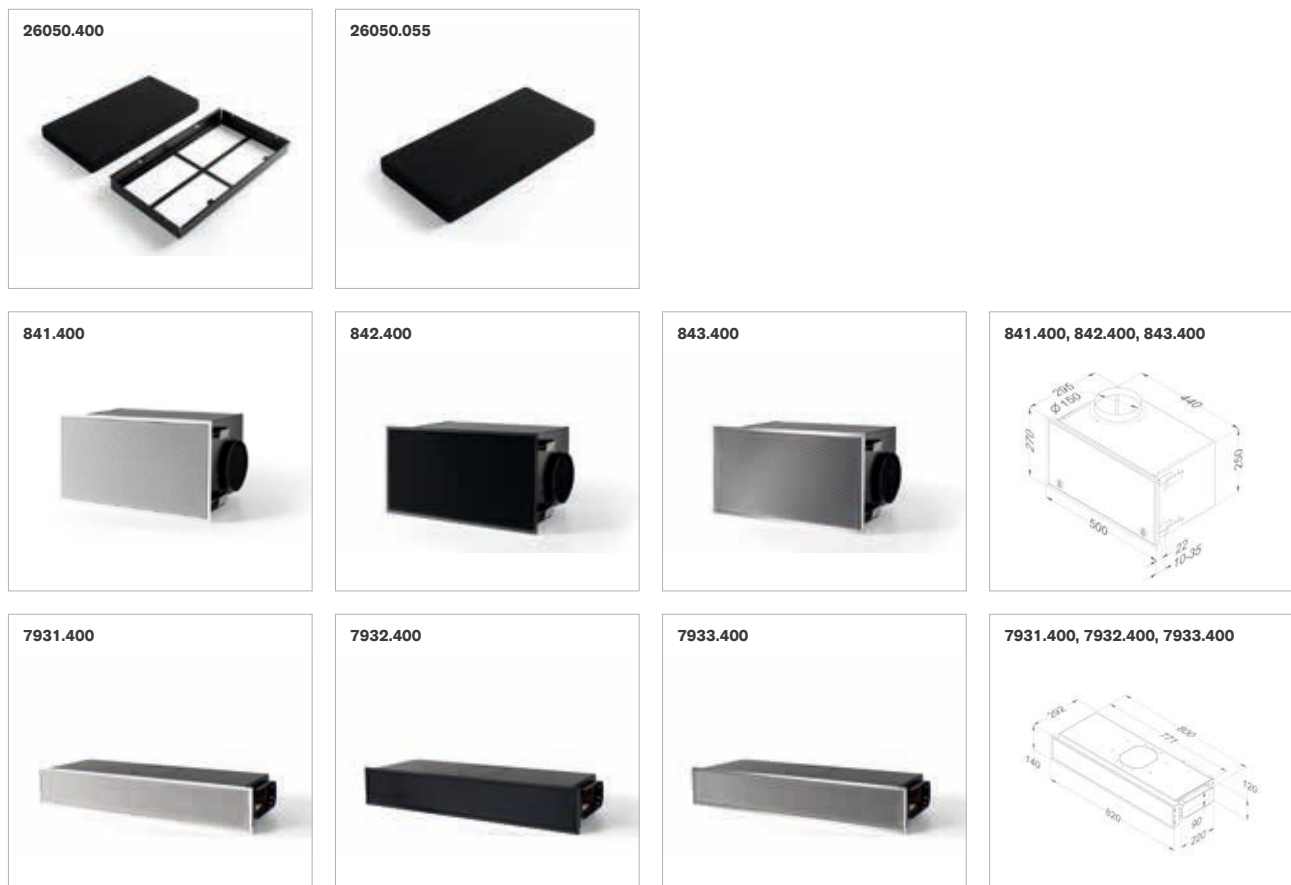





Glass built-in unit

- Glass built-in units for a decorative chimney or canopy
- Convenience and easy control
- Stylish design in white glass

**Distance**

Maximum distance between cooker hood and hob.

**Recirculation**

Recirculation is optional.



BUILT-IN
COOKER
HOODS



Width (cm)	Motor	Colour	EEI	Debiet Setting 3 (m³/u)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
53,8	Integrated	White glass	C	327	46	59	874	£ 629
70,0	Integrated	White glass	C	486	47	59	877	£ 859
83,8	Integrated	White glass	D	337	45	58	876 ⁽³⁾	£ 669
83,8	Integrated	White glass	D	628	47	60	878	£ 959

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(3) This model is only to be used above a hob with maximum 4 cooking zones.



Technical specifications



Glass built-in unit 60 cm
874 white glass



Glass built-in unit 70 cm
877 white glass



Glass built-in unit 90 cm
876 white glass



Glass built-in unit 90 cm
878 white glass

Functions

Controls	Knob	Knob	Knob	Knob
Number of speed settings	3	3	3	3
With noise reduction	▪	▪	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)	Optional (monoblock)	Optional (monoblock)

Lighting

Type of lighting (number/W)	CFL (2×11)	TL8 (2×15)	TL8 (2×15)	TL8 (2×15)
-----------------------------	------------	------------	------------	------------

Technical characteristics

Colour	White	White	White	White
Integrated motor	▪	▪	▪	▪
Weight cooker hood / motor casing (kg)	12.5	20	17	20
Mains voltage (V) / Electrical connection value (W)	230 / 125	230 / 183	230 / 139	230 / 232

Dimensions

Dimensions (W×D×H) (mm)	538×301×371	700×301×340	838×301×371	838×301×382
Opening (L×W) (mm)	510×290	672×290	810×290	810×290
Exhaust opening diameter (mm)	125	150	125	150
Exhaust position	Top	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750	650–750



Air quantity and sound level


Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re 20µPa) / sound power (re 1pW)		
			Setting I	Setting II	Setting III	Setting I	Setting II	Setting III
874	Integrated motor	470	172 / 251	227 / 326	327 / 360	32 / 46	38 / 51	45 / 59
877	Integrated motor	700	263 / 323	356 / 334	486 / 366	33 / 47	38 / 52	45 / 59
876	Integrated motor	470	179 / 229	237 / 334	337 / 390	31 / 45	37 / 51	44 / 58
878	Integrated motor	940	327 / 231	437 / 301	628 / 346	33 / 47	40 / 53	47 / 60

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings


Glass built-in unit 60 cm

874

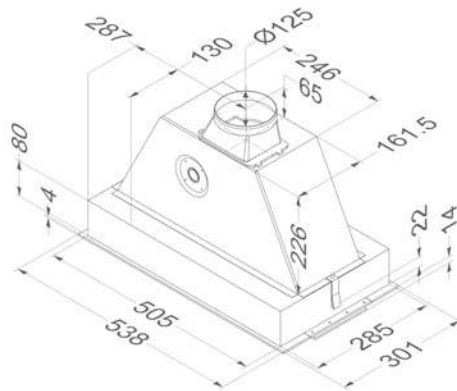


Glass built-in unit 70 cm

877

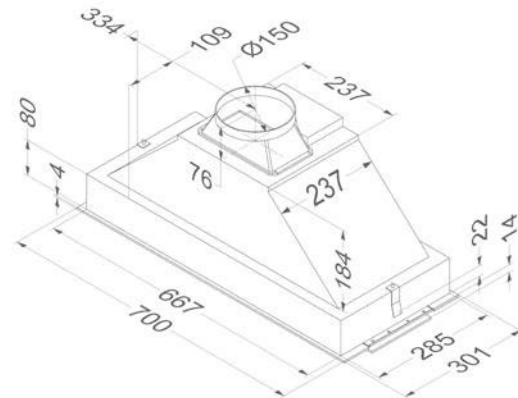


Glass built-in unit 90 cm

876

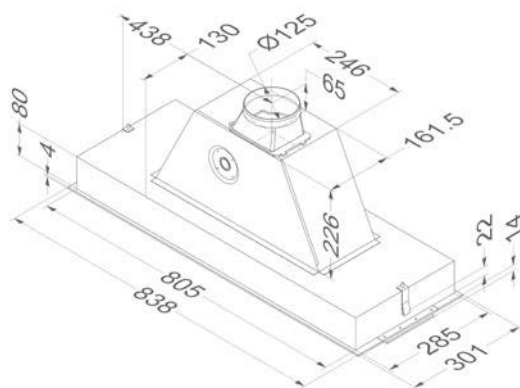

Glass built-in unit 90 cm

878

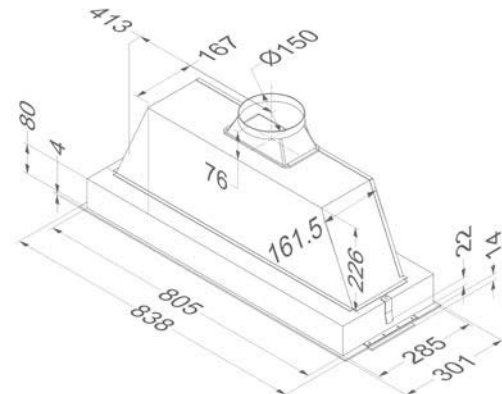

BUILT-IN
COOKER
HOODS



Built-in / **Glass**

Accessories

	Reference	Price/pc	874	876	877	878
Miscellaneous						
Grease filter (replacement)	609.014	£ 49	▪	▪		
Grease filter (replacement) (2 pcs to order)	609.014	£ 49				▪
Grease filter (replacement)	605.014	£ 49			▪	





Accessories

	Reference	Price/pc	874	876	877	878
Recirculation						
Exhaust box with monoblock filter (270×500×295 mm)						
White (≈RAL 9003)	841.400	£ 399	▪	▪	▪	▪
Black (≈RAL 9005)	842.400	£ 399	▪	▪	▪	▪
Grey (≈RAL 7030)	843.400	£ 399	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£ 137	▪	▪	▪	▪
Low built-in box (140 mm high) with monoblock filter (140×820×292 mm)						
White (≈RAL 9003)	7931.400	£ 399	▪	▪	▪	▪
Black (≈RAL 9005)	7932.400	£ 399	▪	▪	▪	▪
Grey (≈RAL 7030)	7933.400	£ 399	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£ 129	▪	▪	▪	▪



BUILT-IN
COOKER
HOODS







Stainless steel Essence

- Built-in units in stainless steel for a decorative chimney or canopy
- Suitable for compact kitchen setup
- Convenience and easy control
- Sleek design filter for the optimum extraction of cooking vapours
- LED lighting (2,700 K)



Distance
Maximum distance
between cooker hood
and hob.



Recirculation
Recirculation is optional.



BUILT-IN
COOKER
HOODS



Width (cm)	Motor	Colour	EEI	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Stainless steel	B	517	37	58	828	£ 549
90	Integrated	Stainless steel	B	521	34	58	829 ⁽³⁾	£ 599

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(3) This model is only to be used above a hob with maximum 4 cooking zones.



Technical specifications



**Stainless steel Essence 60 cm
828**



**Stainless steel Essence 90 cm
829**

Functions

Controls	Buttons	Buttons
Number of speed settings	4	4
Recirculation	Optional (carbon filter cartridge)	Optional (carbon filter cartridge)
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting

Type of lighting (number/W)	Led (2×2)	Led (2×2)
-----------------------------	-----------	-----------

Technical characteristics

Colour	Stainless steel	Stainless steel
Lighting colour (K)	2,700	2,700
Integrated motor	▪	▪
Weight cooker hood / motor casing (kg)	10	11,5
Mains voltage (V) / Electrical connection value (W)	230 / 167	230 / 168

Dimensions

Dimensions (W×D×H) (mm)	546×296×279	846×296×279
Opening (L×W) (mm)	525×275	825×275
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750


Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
828	Integrated motor	581	202 / 274	299 / 392	398 / 458	517 / 492	26 / 37	33 / 44	42 / 53	47 / 58
829	Integrated motor	581	199 / 259	299 / 381	399 / 451	521 / 488	23 / 34	28 / 39	40 / 51	47 / 58

Noise levels measured in accordance with IEC 60704-2:13 standards, flow rates according to IEC 61591.



Technical drawings

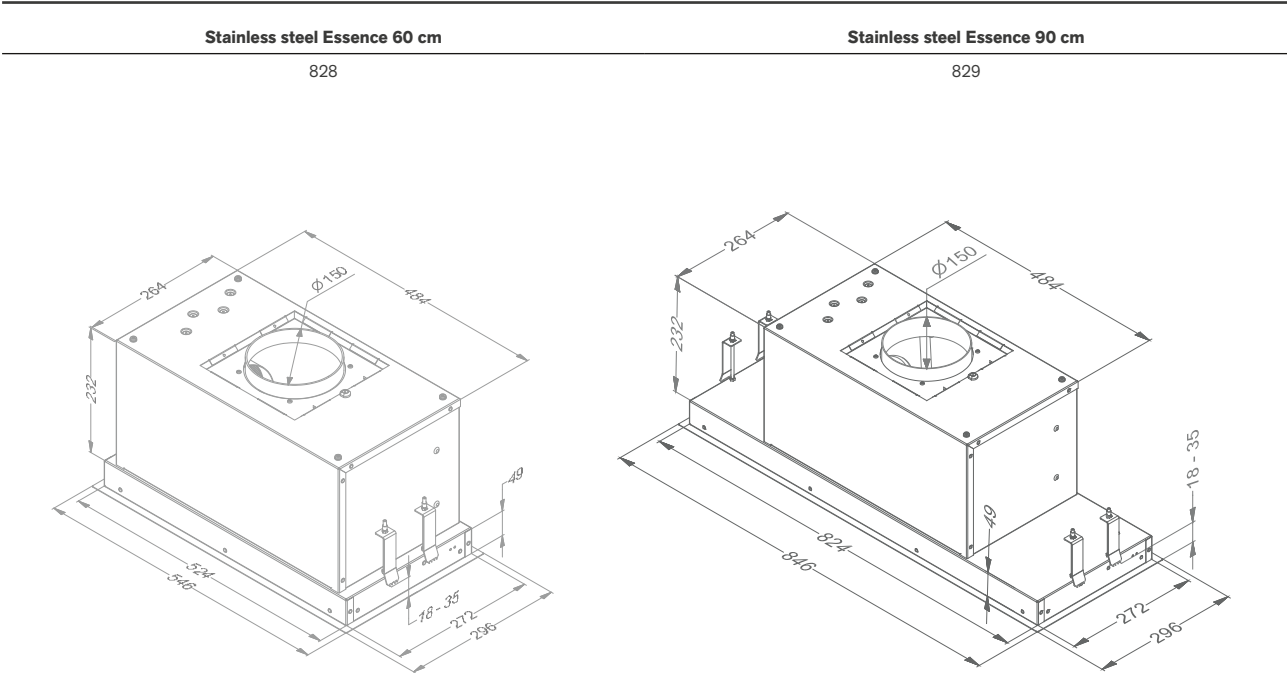

BUILT-IN
COOKER
HOODS

Accessories

	Reference	Price/pc	828	829
Miscellaneous				
Kit with LED lighting (4,000 K)	906.303	£ 65.50	▪	▪
Grease filter (replacement)	828.020	£ 79	▪	
Grease filter (replacement) (2 pcs to order)	829.020	£ 79		▪
Carbon cartridge (without exhaust box) (also replacement)	6200.055	£ 59	▪	▪





Built-under cooker hoods

for shallow cabinets

Fusion Pro

Fusion



Width of cabinet or canopy

60 cm	<input type="checkbox"/>	<input type="checkbox"/>
90 cm	<input type="checkbox"/>	<input type="checkbox"/>
120 cm	<input type="checkbox"/>	

Colour

White	<input type="checkbox"/>	<input type="checkbox"/>
Stainless steel		
Anthracite	<input type="checkbox"/>	

Motor

Integrated	<input type="checkbox"/>	<input type="checkbox"/>
------------	--------------------------	--------------------------

Exhaust

To the outside	<input type="checkbox"/>	<input type="checkbox"/>
Recirculation	Optional	Optional

p. 144

p. 148



Telescopic

Telescopic
Essence



	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>
	Optional	Optional

p. 152

p. 158



BUILT-
UNDER
COOKER
HOODS



WALL-
MOUNTED
COOKER
HOODS



ISLAND
COOKER
HOODS



COOKER
HOOD
ACCESSORIES



HOBS



INFO



Built-under / **Fusion Pro**

Seamless integration into
shallow wall cabinet



Fusion Pro meets the demand for designer cooker hoods in shallow wall cabinets. With this highly developed concept, Fusion Pro, like Fusion, is concealed and integrated into a shallow wall cabinet. Discover all the advantages.



Transparent tilting panel to catch cooking fumes



Convenient storage space



Seamless finishing to protect the wall cabinet



Angled front cover for handleless kitchens



Fusion Pro

- Can be invisibly integrated into a wall cabinet with minimum and maximum depth of between 310-351 mm
- Tilting cover in transparent glass for optimum capture of cooking vapours
- Completely invisible in closed position
- LED strip (3,000 K), dimmable
- Sufficient space for storage



Premium
Product distributed through a selection of partners.



Distance
Maximum distance between cooker hood and hob.



InTouch
Function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	EEL	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Anthracite / Anthracite glass	A+	682	48	59	8710	£ 1,239
	Integrated	White / transparant glass	A+	682	48	59	8711	£ 1,239
90	Integrated	Anthracite / Anthracite glass	A	674	48	59	8740	£ 1,439
	Integrated	White / transparant glass	A	674	48	59	8741	£ 1,439
120	Integrated	Anthracite / Anthracite glass	A	701	48	59	8770	£ 1,729

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Can only be fitted between two wall units.

Video
Fusion Pro





Technical specifications



Fusion Pro 60 cm
8710 anthracite + glass
8711 white + glass

Fusion Pro 90 cm
8740 anthracite + glass
8741 white + glass

Fusion Pro 120 cm
8770 anthracite glass

Functions

Controls	Touch control	Touch control	Touch control
Number of speed settings	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6
With noise reduction	▪	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪
Run-on timer (min.)	10	10	10
Cleaning indicator for grease filter	▪	▪	▪
Replacement indicator for recirculation filter	▪	▪	▪

Lighting

Type of lighting (W)	LED strip (14), dimmable	LED strip (23), dimmable	LED strip (23), dimmable
Lighting colour (K)	3,000	3,000	3,000

Technical characteristics

Colour	8710 Anthracite (≈RAL 7016) 8711 White (≈RAL 9003)	8740 Anthracite (≈RAL 7016) 8741 White (≈RAL 9003)	Anthracite (≈RAL 7016)
Oblique front cover for handleless kitchens	▪	▪	▪
Integrated motor	▪	▪	▪
Weight cooker hood / motor casing (kg)	11	14	17
Mains voltage (V) / Electrical connection value (W)	230 / 116	230 / 124	230 / 124

Dimensions


Dimensions (W×D×H) (mm)	600×310/351×340	900×310/351×340	1200×310/351×340
Width cabinet (mm)	600	900	1200
Minimal/maximal depth cabinet (mm)	310–351	310–351	310–351
Thickness side panel cabinet (mm)	16–19	16–19	16–19
Exhaust opening diameter (mm)	150	150	150
Exhaust position	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	500–750	500–750	500–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	500–750	500–750	500–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m ³ /h)	Air quantity (m ³ /h) / pressure (Pa)				Noise level dB(A) sound pressure (re20μPa) / sound power (re 1 pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
8710, 8711	Integrated motor	815	395 / 174	535 / 353	608 / 389	682 / 390	36 / 48	44 / 56	47 / 59	50 / 62
8740, 8741	Integrated motor	815	391 / 178	535 / 356	606 / 383	674 / 383	36 / 48	44 / 56	47 / 59	50 / 62
8770	Integrated motor	815	405 / 173	553 / 351	626 / 386	701 / 381	36 / 48	44 / 56	47 / 59	50 / 62

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

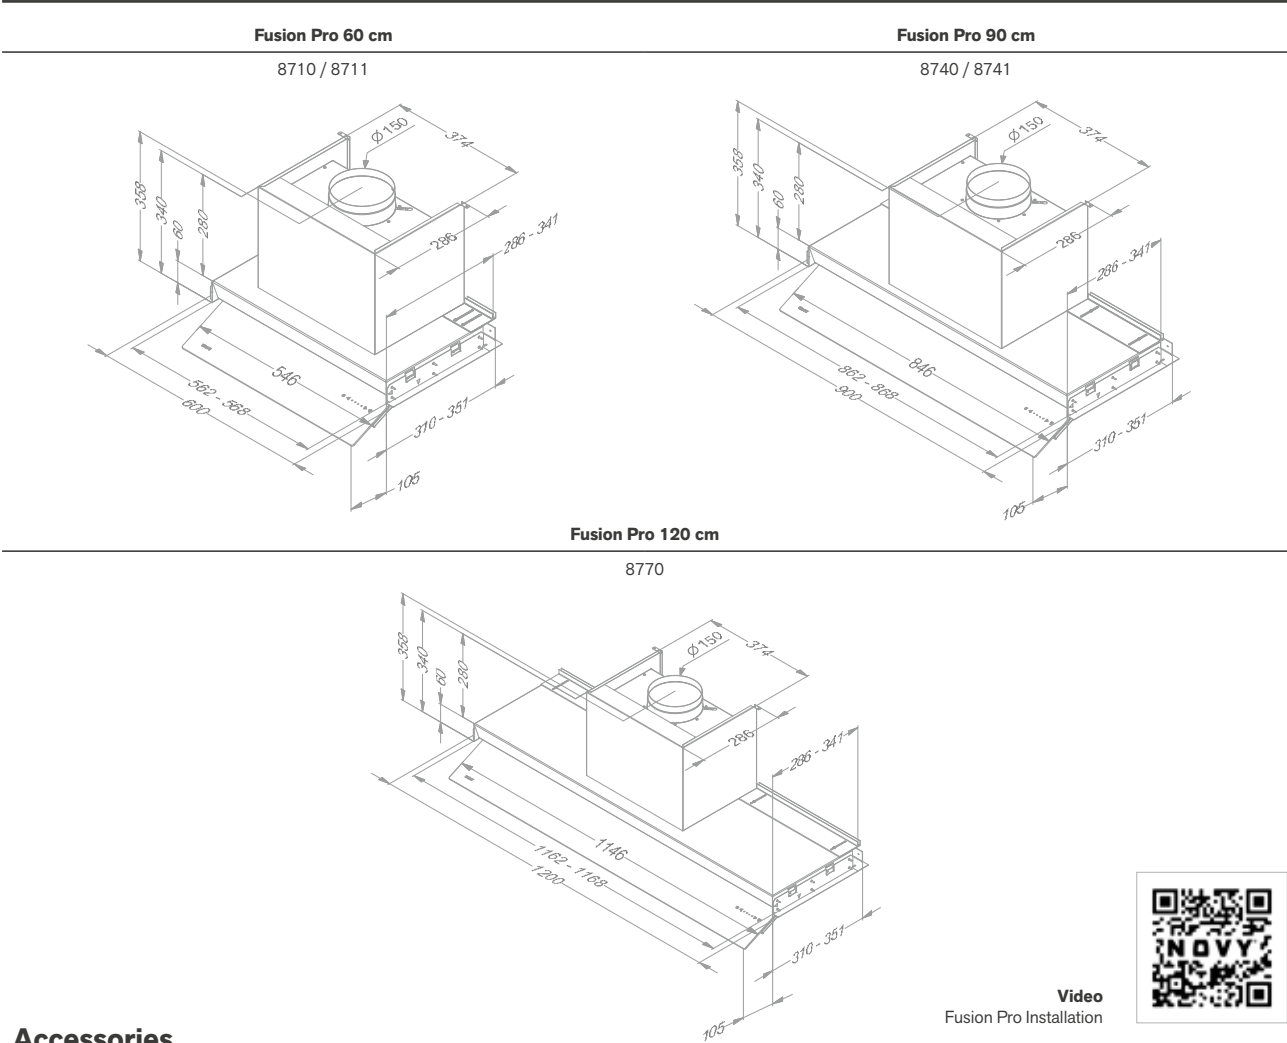



BUILT
UNDER
COOKER
HOODS


Accessories

	Reference	Price/pc	8710	8711	8740	8741	8770
Miscellaneous							
Grease filter (replacement) (2 pcs to order)	8740.050	£ 79	•	•			
Grease filter (replacement) (3 pcs to order)	8740.050	£ 79			•	•	
Grease filter (replacement) (4 pcs to order)	8740.050	£ 79					•
Chimney extension antracite (fixation on shelf)	8840.8160	£ 159	•		•		•
Chimney extension white (fixation on shelf)	8840.8170	£ 159		•		•	
Remote control	840.029	£ 80	•	•	•	•	•
Recirculation							
Monoblock filter (without exhaust box) (also replacement)	8740.400	£ 159	•	•	•	•	•


8740.050




840.029



8740.400



8840.8160

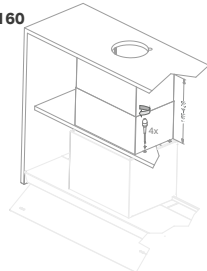





Fusion

- Can be invisibly integrated into a shallow wall cabinet with a built-in depth of only 32 cm
- Completely invisible in closed position
- Tilting cover in white glass for optimum capture of cooking vapours
- Subtle touch control
- LED strip (3,000 K), dimmable



Distance
Maximum distance between cooker hood and hob.



InTouch
Function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	White / White glass	A	608	39	58	680	£ 1,089
90	Integrated	White / White glass	A	629	37	59	686	£ 1,289


Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical specifications



**Fusion 60 cm
680 white glass**



**Fusion 90 cm
686 white glass**

Functions

Controls	Touch control	Touch control
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting

Type of lighting (number/W)	LED strip (9), dimmable	LED strip (16), dimmable
Lighting colour (K)	3,000	3,000

Technical characteristics

Colour	White	White
Integrated motor	▪	▪
Weight cooker hood / motor casing (kg)	12.5	15.2
Mains voltage (V) / Electrical connection value (W)	230 / 121	230 / 129

Dimensions (mm)


Dimensions (W×D×H) (mm)	520×280×320	820×280×320
Opening(W×D) (mm)	505×265	805×265
Exhaust opening diameter (mm)	150	150
Exhaust position	Top / rear	Top / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	500–750	500–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	500–750	500–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1 pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
680	Integrated motor	815	230 / 68	397 / 238	527 / 367	608 / 367	29 / 39	40 / 51	48 / 58	51 / 61
686	Integrated motor	815	237 / 70	415 / 242	547 / 381	629 / 382	28 / 37	40 / 51	48 / 59	50 / 61

Noise levels measured in accordance with IEC 60704-2:13 standards, flow rates according to IEC 61591.

Technical drawings

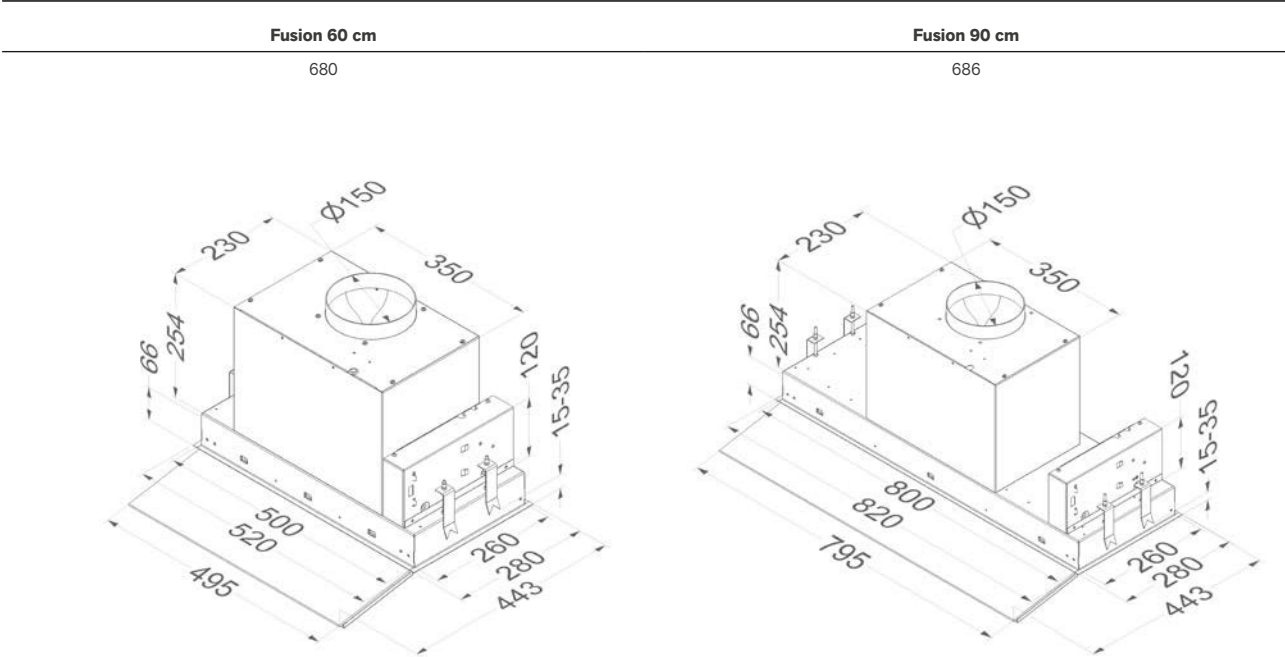

Accessories

	Reference	Price/pc	680	686
Miscellaneous				
Grease filter (replacement)	680.020	£ 79	▪	
Grease filter (replacement) (2 pcs to order)	680.020	£ 79		▪
Remote control	840.029	£ 80	▪	▪
Recirculation				
Monoblock filter (without exhaust box) (also replacement)	680.400	£ 143	▪	▪







Telescopic

- Can be integrated flush with the wall cabinet
- Telescopic slide for optimum capture of cooking vapours
- Sufficient space for a herb rack
- Glass visor for a transparent look
- LED lighting (2,700 K)
- Electronic control (663, 693) with extra functions



Distance

Maximum distance between cooker hood and hob.



Recirculation

Recirculation is optional.



In optie
663
693



BUILT
UNDER
COOKER
HOODS

Width (cm)	Motor	Colour	Controls	EEI	Maximum Flow Rate (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
						Minimum	Maximum		
60	Integrated	Stainless steel	Knob	C	346	49	60	661	£ 749
	Integrated	Stainless steel	Knob	D	594	55	63	662	£ 959
	Integrated	Stainless steel	Buttons	C	614	47	58	663	£ 1,169
90	Integrated	Stainless steel	Knob	C	348	48	60	691 ⁽³⁾	£ 929
	Integrated	Stainless steel	Knob	C	587	50	61	692	£ 1,189
	Integrated	Stainless steel	Buttons	C	605	43	55	693	£ 1,399

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(3) This model is only to be used above a hob with maximum 4 cooking zones.



Built-under / **Telescopic**

Technical specifications



**Telescopic 60 cm
661 stainless steel**

**Telescopic 60 cm
662 stainless steel**

**Telescopic 60 cm
663 stainless steel**

Functions

	Knob	Knob	Buttons
Controls			
Number of speed settings	3	3	3 + power function
Power setting with automatic downshift (min.)			6
With noise reduction	▪	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs			Optional
Auto-Stop, automatic switch-off after 3 hours			▪
Run-on timer (min.)			10
Cleaning indicator for grease filter			▪
Replacement indicator for recirculation filter			▪

Lighting

Type of lighting (number/W)	LED (2×2)	LED (2×2)	LED (2×2)
Lighting colour (K)	2,700	2,700	2,700

Technical characteristics

Colour side profile	Stainless steel (replaceable)	Stainless steel (replaceable)	Stainless steel (replaceable)
Integrated motor	▪	▪	▪
Weight cooker hood / motor casing (kg)	12	13	13
Mains voltage (V) / Electrical connection value (W)	230 / 103	230 / 182	230 / 181

Dimensions

Dimensions (W×D×H) (mm)	598×290×348	598×290×405	598×290×405
Minimum dimensions of cabinet (W×D×H) (mm)	600×280×450	600×280×450	600×280×450
Opening (mm)	560-570×180	560-570×180	560-570×180
Exhaust opening diameter (mm)	125	150	150
Exhaust position	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750




**Telescopic 90 cm
691 stainless steel**

**Telescopic 90 cm
692 stainless steel**

**Telescopic 90 cm
693 stainless steel**

Knob	Knob	Buttons
3	3	3 + power function
		6
▪	▪	▪
Optional (monoblock)	Optional (monoblock)	Optional (monoblock)
		Optional
		▪
		10
		▪
		▪
LED (2×2)	LED (2×2)	LED (2×2)
2,700	2,700	2,700
Stainless steel (replaceable)	Stainless steel (replaceable)	Stainless steel (replaceable)
▪	▪	▪
16	18	18
230 / 101	230 / 194	230 / 200
898×290×348	898×290×348	898×290×348
900×280×450	900×280×450	900×280×450
860-870×180	860-870×180	860-870×180
125	150	150
Top	Top	Top
650–750	650–750	650–750
600–750	600–750	600–750
650–750	650–750	650–750



Air quantity and sound level

		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV / Power setting	Setting I	Setting II	Setting III	Setting IV / Power setting
Type										
661	Integrated motor	470	212 / 252	255 / 290	346 / 344		38 / 49	43 / 54	48 / 60	
662	Integrated motor	940	387 / 267	464 / 326	594 / 408		43 / 55	47 / 58	51 / 63	
663	Integrated motor	940	285 / 187	397 / 287	473 / 336	614 / 411	36 / 47	43 / 55	47 / 58	51 / 63
691	Integrated motor	470	215 / 273	257 / 318	348 / 379		36 / 48	41 / 52	48 / 60	
692	Integrated motor	940	353 / 313	423 / 347	587 / 397		39 / 50	43 / 55	50 / 61	
693	Integrated motor	940	259 / 153	356 / 225	436 / 262	605 / 318	32 / 43	39 / 50	43 / 55	50 / 61



Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

Telescopic 60 cm

661



662 / 663

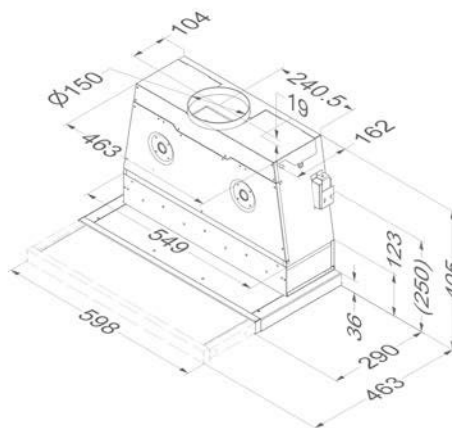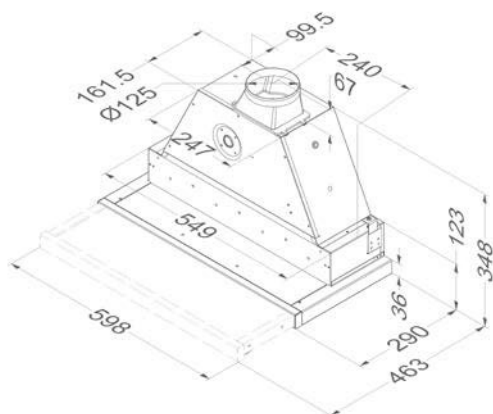

Telescopic 90 cm

691


692 / 693

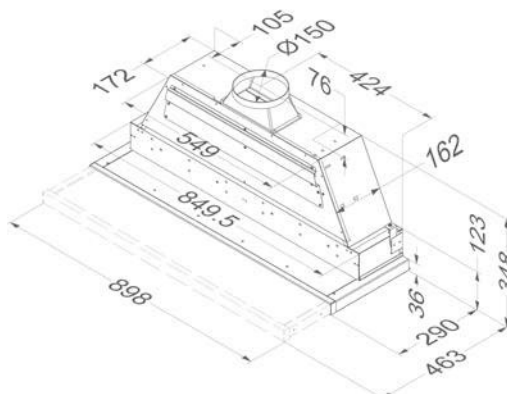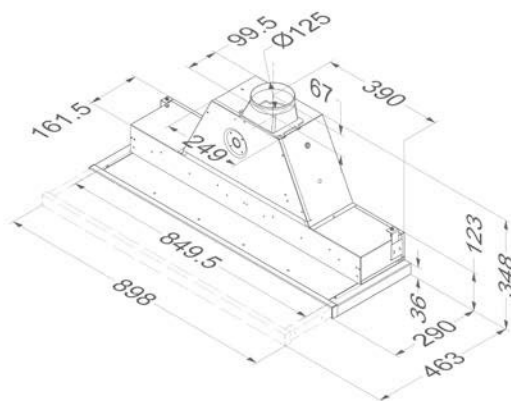



Accessories

	Reference	Price/pc	661	662	663	691	692	693
Miscellaneous								
Kit with LED lighting (4,000 K)	906.303	£ 65.50	•	•	•	•	•	•
Grease filter (replacement)	605.014	£ 49	•	•	•			
Grease filter (replacement) (2 pcs to order)	609.014	£ 49				•	•	•
Kit for InTouch including an interface (to be mounted before installation of the hood as a replacement for the original interface) and a remote control	990.021	£ 131			•			•
Kit connection with external cover and/or lighting	990.030	£ 134			•			•
Recirculation								
Kit with monoblock filters (without exhaust box)	662.400	£ 156	•	•	•			
Monoblock replacement filter for kit 662.400	662.060	£ 123	•	•	•			
Kit with monoblock filters (without exhaust box)	692.400	£ 195				•	•	•
Monoblock replacement filter for kit 692.400	692.060	£ 155				•	•	•

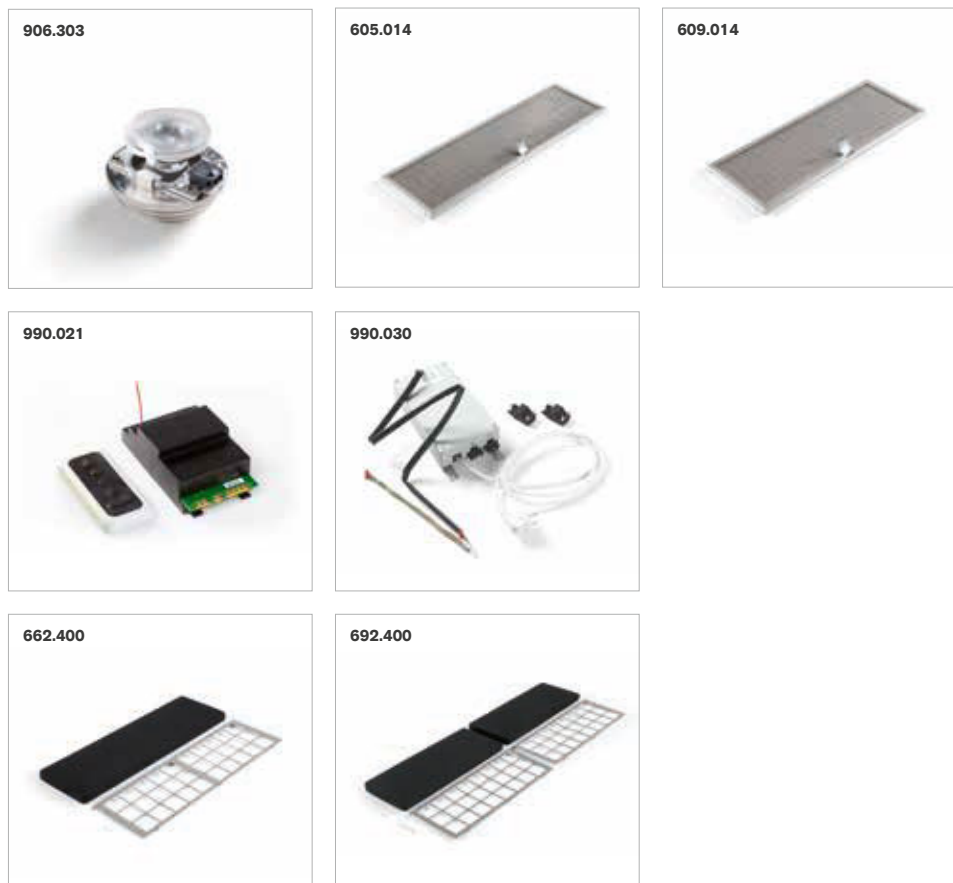





Telescopic Essence

- Can be integrated flush with the wall cabinet
- Telescopic slide for optimum capture of cooking vapours
- Sleek design filter for the optimum extraction of cooking vapours
- To be attached to intermediate shelf
- LED lighting (2,700 K)



Distance

Maximum distance between cooker hood and hob.



Recirculation

Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Stainless steel	B	501	33	56	650	£ 599
90	Integrated	Stainless steel	B	522	34	58	655 ⁽³⁾	£ 649

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(3) This model is only to be used above a hob with maximum 4 cooking zones. Provide for a kitchen cupboard with no bottom.



Technical specifications

**Telescopic Essence 60 cm**
655 stainless steel**Telescopic Essence 90 cm**
655 stainless steel

Functions

Controls	Buttons	Buttons
Number of speed settings	4	4
Recirculation	Optional (carbon filter cartridge)	Optional (carbon filter cartridge)
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting

Type of lighting (number/W)	Led (2×2)	Led (2×2)
Lighting colour (K)	2,700	2,700

Technical characteristics

Colour side profile	Stainless steel (not replaceable)	Stainless steel (not replaceable)
Integrated motor	▪	▪
Weight cooker hood / motor casing (kg)	10	12
Mains voltage (V) / Electrical connection value (W)	230 / 162	230 / 165

Dimensions


Dimensions (W×D×H) (mm)	598×290×316	898×290×316
Minimum dimensions of cabinet (W×D×H) (mm)	600×280×300	900×280×300
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m ³ /h)	Air quantity (m ³ /h) / pressure (Pa)				Noise level dB(A) sound pressure (re20μPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
650	Integrated motor	581	192 / 271	290 / 381	387 / 442	501 / 480	21 / 33	28 / 39	38 / 49	45 / 56
655	Integrated motor	581	206 / 282	303 / 374	405 / 445	522 / 482	23 / 34	31 / 42	42 / 53	46 / 58

Noise levels measured in accordance with IEC 60704-2:13 standards, flow rates according to IEC 61591.

Technical drawings

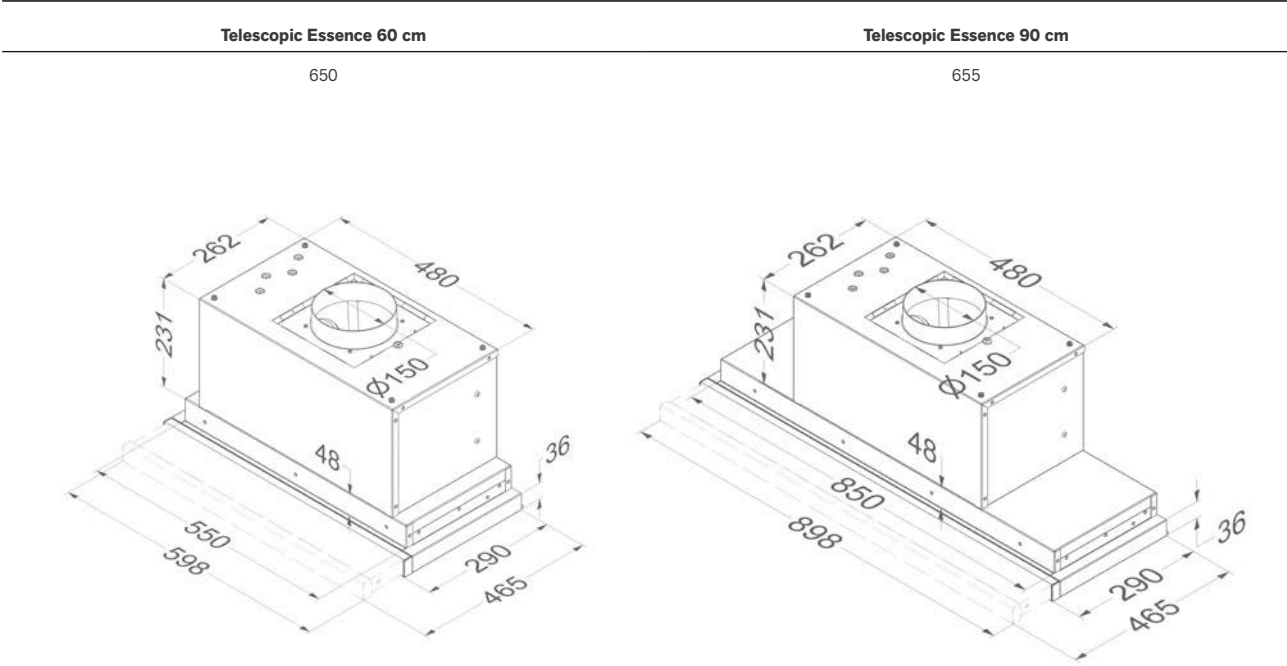

Accessories

	Reference	Price/pc	650	655
Miscellaneous				
Kit with LED lighting (4,000 K)	906.303	£ 65,50	▪	▪
Grease filter (replacement)	650.020	£ 79	▪	
Grease filter (replacement) (2 pcs to order)	655.020	£ 79		▪
Carbon cartridge (without exhaust box) (also replacement)	6200.055	£ 59	▪	▪





Wall-mounted cooker hoods

Vision



Headline



Flatline



Width

60 cm			
75 cm	■		
90 cm	■	■	■
120 cm	■		■
150 cm			

Colour

White	■		
Stainless steel		■	■
Black	■		■

Motor

Integrated	■	■	■
Not included	■	■	■

Exhaust

To the outside	■	■	■
Recirculation	■	■	Optional

p. 164

p. 170

p. 176



Proline

Salsa



		<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	
	<input type="checkbox"/>	
	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	<input type="checkbox"/>
	Optional	Optional

p. 182

p. 188



WALL-MOUNTED COOKER HOODS



ISLAND COOKER HOODS



COOKER HOOD ACCESSORIES



HOB



INFO





Vision

- Modern, clean look
- Option to install without a chimney with an exhaust to the back
- Models with recirculation as standard, making an exhaust to the outside unnecessary
- Subtle LED lighting (2,700 K)



Distance
Maximum distance
between cooker hood
and hob.



Recirculation
Standard for: 7856, 7858,
7859, 7836, 7838, 7839,
7848, 7849



In option



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
75	Integrated	Black / stainless steel	A+	788	35	51	7850 ⁽³⁾	£ 1,199
	Integrated	Black / black	A+	788	35	51	7853 ⁽³⁾	£ 1,199
	Integrated	White / stainless steel	A+	788	35	51	7851 ⁽³⁾	£ 1,199
	Integrated	Black / stainless steel		478	45	64	7858 ⁽³⁾ Recirculation	£ 1,199
	Integrated	Black / black		478	45	64	7856 ⁽³⁾ Recirculation	£ 1,199
	Integrated	White / stainless steel		478	45	64	7859 ⁽³⁾ Recirculation	£ 1,199
90	Integrated	Black / stainless steel	A+	808	35	51	7830	£ 1,569
	Integrated	Black / black	A+	808	35	51	7833	£ 1,569
	Integrated	White / stainless steel	A+	808	35	51	7831	£ 1,569
	Not included	Black / stainless steel	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	7835 ⁽¹⁾	£ 1,199
	Integrated	Black / stainless steel		490	45	66	7838 Recirculation	£ 1,569
	Integrated	Black / black		490	45	66	7836 Recirculation	£ 1,569
120	Integrated	White / stainless steel		490	45	66	7839 Recirculation	£ 1,569
	Integrated	Black / stainless steel	A+	784	32	52	7840	£ 1,959
	Integrated	White / stainless steel	A+	784	32	52	7841	£ 1,959
	Integrated	Black / stainless steel		490	45	66	7848 Recirculation	£ 1,959
	Integrated	White / stainless steel		490	45	66	7849 Recirculation	£ 1,959

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

⁽¹⁾ This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).

The air volume/noise level depends on the type of motor and installation.

⁽³⁾ These models are only to be used above a hob up to 65 cm wide and with up to 4 cooking zones.



Technical specifications



Vision 75 cm
7850 black glass / st. steel
7853 black glass / black
7851 white glass / st. steel



Vision 75 cm
7858 black glass / st. steel
7856 black glass / black
7859 white glass / st. steel



Vision 90 cm
7830 black glass / st. steel
7833 black glass / black
7831 white glass / st. steel

Functions

Controls	Touch control	Touch control	Touch control
Number of speed settings	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6
With noise reduction	▪	▪	▪
Recirculation		▪ (monoblock)	
InTouch function for hobs	Optional	Optional	Optional
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪
Run-on timer (min.)	10	30	10
Cleaning indicator for grease filter	▪	▪	▪
Replacement indicator for recirculation filter		▪	

Lighting

Type of lighting (number/W)	LED (2×2)	LED (2×2)	LED (2×2)
Lighting colour (K)	2,700	2,700	2,700

Technical characteristics

Integrated motor	▪	▪	▪
Motor not included (suitable for wall motor, flat roof motor outside)			
Weight cooker hood / motor casing (kg)	27.5	22.5	30
Mains voltage (V) / Electrical connection value (W)	230 / 325	230 / 200	230 / 325

Dimensions

Dimensions (B×D) (mm)	748×426	748×426	898×426
Height of the cooker hood (Hmin–Hmax) (mm)	517 (Rear exhaust) / 830–1100 (Top exhaust)	517	517 (Rear exhaust) / 830–1100 (Top exhaust)
Maximum height with shaft extension (mm) optional	1390		1390
Exhaust opening diameter (mm)	150		150
Exhaust position	Top / rear	Top	Top / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	500–750	500–750	500–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	500–750	500–750	500–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750



Vision 90 cm
7835 black glass / st. steel
Motor not included



Vision 90 cm
7838 black glass / st. steel
7836 black glass / black
7839 white glass / st. steel



Vision 120 cm
7840 black glass / st. steel
7841 white glass / st. steel



Vision 120 cm
7848 black glass / st. steel
7849 white glass / st. steel

Touch control	Touch control	Touch control	Touch control
3 + power function	3 + power function	3 + power function	3 + power function
6	6	6	6
▪	▪	▪	▪
	▪ (monoblock)		▪ (monoblock)
Optional	Optional	Optional	Optional
▪	▪	▪	▪
10	30	10	30
▪	▪	▪	▪
	▪		▪
LED (2×2)	LED (2×2)	LED (2×2)	LED (2×2)
2,700	2,700	2,700	2,700
	▪	▪	▪
▪			
25 + motor	25	32.5	27.5
230 / 7 + motor	230 / 200	230 / 325	230 / 200
898×426	898×426	1198×426	1198×426
517 (Rear exhaust) / 830–1100 (Top exhaust)	517	517 (Rear exhaust) / 830–1100 (Top exhaust)	517
1390		1390	
150		150	
Top / rear	Top	Top / rear	Boven
500–750	500–750	500–750	500–750
500–750	500–750	500–750	500–750
650–750	650–750	650–750	650–750



Air quantity and sound level

Type	Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1 pW)			
		Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
7850, 7853, 7851 Integrated motor	800	248 / 327	333 / 492	495 / 550	788 / 577	25 / 35	33 / 43	40 / 51	51 / 62
7858, 7856, 7859 Integrated motor	800	126	191	418	478	34 / 45	45 / 55	53 / 64	59 / 70
7830, 7833, 7831 Integrated motor	800	244 / 329	341 / 501	467 / 558	808 / 585	25 / 35	32 / 42	41 / 51	51 / 62
7835 Not included	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7838, 7836, 7839 Integrated motor	800	124	196	394	490	34 / 45	45 / 55	55 / 66	59 / 70
7840, 7841 Integrated motor	800	239 / 321	318 / 501	483 / 558	784 / 589	25 / 32	32 / 42	41 / 52	51 / 62
7848, 7849 Integrated motor	800	124	196	394	490	35 / 45	45 / 55	56 / 66	60 / 70

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical drawings

Vision 75 cm	Vision 75 cm	Vision 90 cm	Vision 90 cm
7850 / 7853 / 7851	7858 / 7856 / 7859	7830 / 7833 / 7831	7835
Vision 90 cm	Vision 120 cm	Vision 120 cm	
7838 / 7836 / 7839	7840 / 7841	7848 / 7849	

a) With chimney extension - **With recirculation

(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).
The air volume/noise level depends on the type of motor and installation.

	Reference	Price/pc	7850 / 7851	7853	7858 / 7859	7856	7830 / 7831	7833	7835	7838 / 7839	7836	7840 / 7841	7848 / 7849
Motor at a distance													
Remote motor for inside	245.999	£ 539							•				
Wall motor, minimum 5 m between cooker hood and motor	445.999	£ 879							•				
Roof motor 48.8 cm height	745.999	£ 1,479							•				
Roof motor with noise reduction 78.4 cm height	755.999	£ 1,699							•				
Recirculation													
Monoblock replacement filter	7400.055	£ 129			•	•				•	•		•
Miscellaneous													
Kit with LED lighting (4,000 K)	906.303	£ 65.50	•	•	•	•	•	•	•	•	•	•	•
Chimney extension stainless steel	7830.100	£ 269	•				•		•			•	
Chimney extension black	7833.100	£ 329		•				•					
Grease filter (replacement) (2 pcs to order)	7830.020	£ 49	•	•	•	•	•	•	•	•	•	•	•
Kit for InTouch including an interface (to be mounted before installation of the hood as a replacement for the original interface) and a remote control	990.021	£ 131	•	•	•	•	•	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£ 35							•				







Headline

- Flat cooker hood with subtle LED strip
- Option to install without a chimney with an exhaust at the back
- Model 7809 has recirculation as standard, which makes an exhaust to the outside unnecessary
- LED strip (3,000 K)



Distance
Maximum distance
between cooker hood
and hob.



Recirculation
Recirculation is optional.
Standard for: 7809



In option



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated	Stainless steel	A	764	34	51	7800	£ 2,239
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7805	£ 2,049
	Integrated	Stainless steel		759	37	58	7809 Recirculation	£ 2,519

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

⁽¹⁾ This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).
The air volume/noise level depends on the type of motor and installation.



Technical specifications



**Headline 90 cm
7800 stainless steel**



**Headline 90 cm
7805 stainless steel
Motor not included**



**Headline 90 cm
7809 stainless steel**

Functions

Controls	Buttons	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6
With noise reduction	▪	▪	▪
Recirculation			▪ (monoblock)
InTouch function for hobs	Optional	Optional	Optional
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪
Run-on timer (min.)	10	10	30
Cleaning indicator for grease filter	▪	▪	▪
Replacement indicator for recirculation filter			▪

Lighting

Type of lighting (number/W)	LED strip (20)	LED strip (20)	LED strip (20)
Lighting colour (K)	3,000	3,000	3,000

Technical characteristics

Integrated motor	▪		▪
Motor not included (suitable for wall motor, flat roof motor outside)		▪	
Weight cooker hood / motor casing (kg)	34	27 + motor	33
Mains voltage (V) / Electrical connection value (W)	230 / 307	230 / 20 + motor	230 / 284

Dimensions (mm)

Dimensions (W×D×H) (mm)	900×640	900×640	900×640
Height of the cooker hood (Hmin–Hmax) (mm)	630 (Rear exhaust) / 1040–1300 (Top exhaust)	630 (Rear exhaust) / 1040–1300 (Top exhaust)	630
Height of the Cooker hood met Recirculation (Hmin–Hmax) (mm)			630
Maximum height with shaft extension (mm) optional	1900	1900	
Exhaust opening diameter (mm)	150	150	
Exhaust position	Top / rear	Top / rear	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	500–600	500–600	500–600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	500–600	500–600	500–600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	500–600	500–600	500–600



Air quantity and sound level


Type	Maximum free flow rate (m ³ /h)	Air quantity (m ³ /h) / pressure (Pa)				Noise level dB(A) sound pressure (re20μPa) / sound power (re 1pW)			
		Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
7800 Integrated motor	800	232 / 313	349 / 483	512 / 540	764 / 563	24 / 34	32 / 42	40 / 51	49 / 60
7805 Not included	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7809 Integrated motor	800	182	309	497	759	27 / 37	37 / 48	47 / 58	56 / 67

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings


Headline 90 cm

7800 / 7805

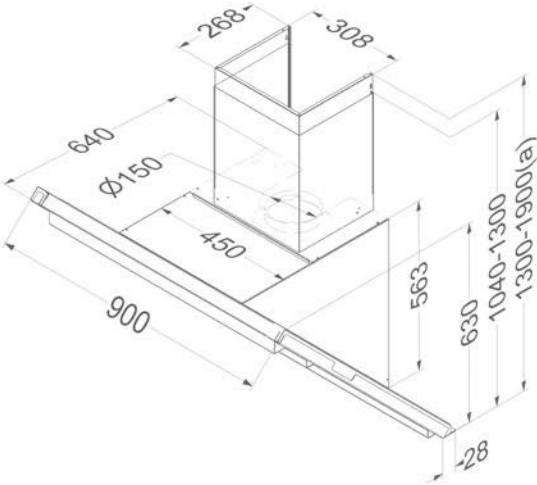

Headline 90 cm

7809

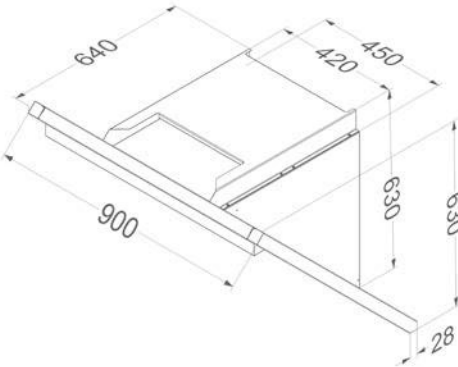

a) With chimney extension - **With recirculation

(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).
The air volume/noise level depends on the type of motor and installation.




Accessories

	Reference	Price/pc	7800	7805	7809
Motor at a distance					
Remote motor for inside	245.999	£ 539		•	
Wall motor, minimum 5 m between cooker hood and motor	445.999	£ 879		•	
Roof motor 48.8 cm height	745.999	£ 1,479		•	
Roof motor with noise reduction 78.4 cm height	755.999	£ 1,699		•	
Miscellaneous					
Chimney extension	7410.100	£ 213	•	•	
Back wall panel 900x500x15 (B×H×D)(mm) Stainless steel	150.250	£ 236	•	•	•
Grease filter (replacement) (2 pcs to order)	7400.020	£ 79	•	•	•
Kit for InTouch including an interface (to be mounted before installation of the hood as a replacement for the original interface) and a remote control	990.021	£ 131	•	•	•
Extension cable for remote motors (5 m)	7000.092	£ 35		•	
Kit connection with external cover and/or lighting	990.030	£ 134	•	•	•

245.999




245.999



445.999




445.999



745.999




745.999



755.999



755.999



7400.020




990.021



990.030



990.030





Accessories

	Reference	Price/pc	7800	7805	7809
Recirculation					
Monoblock replacement filter (2 pcs to order)	830.055	£ 137			•







Flatline

- Extra slim lines
- Seamless finish
- Subtle looking LED lighting (2,700 K)
- Reversible chimney for recirculation as standard



InTouch
Function for controlling the cooker hood from the hob.



Distance
Maximum distance between cooker hood and hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated	Stainless steel	A+	635	35	55	7600	£ 1,649
	Integrated	Black	A+	635	35	55	7602	£ 1,799
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7605	£ 1,409
120	Integrated	Stainless steel	A+	631	36	55	7610	£ 1,909
	Integrated	Black	A+	631	36	55	7612	£ 1,999
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7615	£ 1,679

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

⁽¹⁾ This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).
The air volume/noise level depends on the type of motor and installation.



Technical specifications



**Flatline wall 90 cm
7600 stainless steel /
7602 black
(≈RAL 9005)**



**Flatline wall 90 cm
7605 stainless steel
Motor not included**



**Flatline wall 120 cm
7610 stainless steel /
7612 black
(≈RAL 9005)**



**Flatline wall 120 cm
7615 stainless steel
Motor not included**

Functions

Controls	Buttons	Buttons	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6	6
With noise reduction	▪	▪	▪	▪
Recirculation	Optional (monoblock)		Optional (monoblock)	
InTouch function for hobs	▪	▪	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪	▪
Run-on timer (min.)	10	10	10	10
Cleaning indicator for grease filter	▪	▪	▪	▪
Replacement indicator for recirculation filter	▪		▪	

Lighting

Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700	2,700	2,700	2,700

Technical characteristics

Colour	7600 stainless steel 7602 zwart (≈RAL 9005)	7605 stainless steel	7610 stainless steel 7612 zwart (≈RAL 9005)	7615 stainless steel
Integrated motor	▪		▪	
Motor not included (suitable for wall motor, flat roof motor outside)		▪		▪
Weight cooker hood / motor casing (kg)	30	27 + motor	38.5	35.5 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 117	230 / 12 + motor	230 / 117	230 / 12 + motor

Dimensions

Dimensions (W×D×H) (mm)	898×554	898×554	1198×554	1198×554
Height of the cooker hood (Hmin–Hmax) (mm)	660–1050	660–1050	660–1050	660–1050
Height of the cooker hood with recirculation (Hmin–Hmax) (mm)	730–1120		730–1120	
Maximum height with shaft extension (mm) optional	1410	1410	1410	1410
Maximum height with shaft extension with recirculation (mm) optional	1480		1480	
Exhaust opening diameter (mm)	150	150	150	150
Exhaust position	Top	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750	650–750



Air quantity and sound level


Type		Maximum free flow rate (m ³ /h)	Air quantity (m ³ /h) / pressure (Pa)				Noise level dB(A) sound pressure (re20μPa) / sound power (re 1 pW)			
			Setting I	Setting II	Setting III	Setting IV / Power setting	Setting I	Setting II	Setting III	Setting IV / Power setting
7600, 7602	Integrated motor	815	233 / 70	415 / 240	551 / 384	635 / 385	24 / 35	36 / 47	44 / 55	46 / 57
7605	Not included		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7610, 7612	Integrated motor	815	259 / 83	420 / 247	550 / 380	631 / 381	26 / 36	38 / 49	44 / 55	48 / 59
7615	Not included		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)

Noise levels measured in accordance with IEC 60704-2:13 standards, flow rates according to IEC 61591.


Technical drawings

Flatline wall 90 cm

7600 / 7602

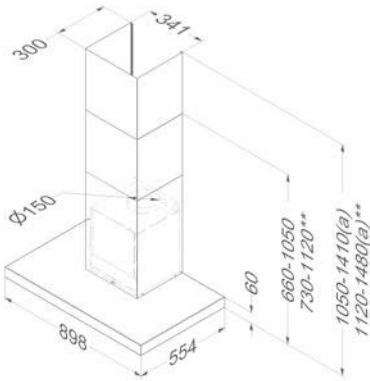


7605

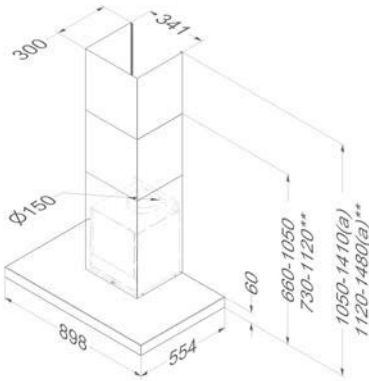


Flatline wall 120 cm

7610 / 7612

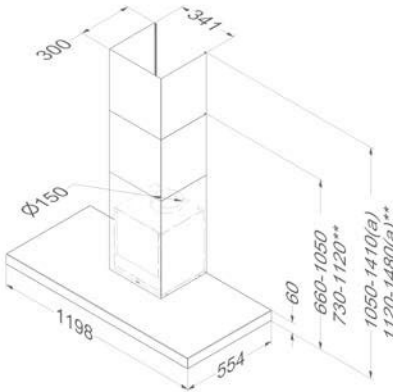

7615

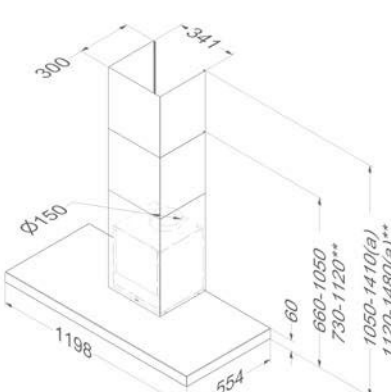

a) With chimney extension - **With recirculation

(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).
The air volume/noise level depends on the type of motor and installation.




Accessories

	Reference	Price/pc	7600	7602	7605	7610	7612	7615
Motor at a distance								
Remote motor for inside	245.999	£ 539			▪			▪
Wall motor, minimum 5 m between cooker hood and motor	445.999	£ 879			▪			▪
Roof motor 48.8 cm height	745.999	£ 1,479			▪			▪
Roof motor with noise reduction 78.4 cm height	755.999	£ 1,699			▪			▪
Miscellaneous								
Chimney extension Stainless steel	7600.100	£ 221	▪		▪	▪		▪
Chimney extension Black	7602.100	£ 229		▪			▪	
Back panel 900×690×15 (B×H×D) (mm) Stainless steel	150.200	£ 236	▪		▪			
Back panel 900×690×15 (B×H×D) (mm) Black	152.200	£ 239		▪				
Back panel 900×750×15 (B×H×D) (mm) Stainless steel	150.275	£ 266	▪		▪			
Back panel 1200×690×15 (B×H×D) (mm) Stainless steel	170.200	£ 266				▪		▪
Back panel 1200×690×15 (B×H×D) (mm) Black	172.200	£ 266					▪	
Back panel 1200×750×15 (B×H×D) (mm) Stainless steel	170.275	£ 279				▪		▪
Grease filter (replacement)	7400.020	£ 79	▪	▪	▪	▪	▪	▪
Kit with LED lighting (4,000 K)	906.307	£ 131	▪	▪	▪	▪	▪	▪
Remote control	840.029	£ 80	▪	▪	▪	▪	▪	▪
Extension cable for remote motors (5 m)	7000.092	£ 35			▪			▪
Kit connection with external cover and/or lighting	990.030	£ 134	▪	▪	▪	▪	▪	▪

245.999




245.999



445.999




445.999



745.999




745.999



755.999



755.999




840.029



990.030



990.030



7400.020





Accessories

	Reference	Price/pc	7600	7602	7605	7610	7612	7615
Recirculation								
Recirculation kit	7600.400	£ 174	•	•		•	•	
Monoblock replacement filter	7600.060	£ 129	•	•		•	•	







Proline

- Sleek and sturdy design
- Seamless finish
- Maximum efficiency but extremely quiet
- Subtle LED lighting (2,700 K)
- Reversible chimney for recirculation as standard



Distance
Maximum distance
between cooker hood
and hob.



InTouch
Function for controlling the
cooker hood from the hob.
In option



Recirculation
Recirculation is optional.



In option



Sound level during normal
use in dB(A) (re 1 pW)

Width (cm)	Motor	Colour	EEl	Flow power function (m³/h)	Minimum	Maximum	Ref.	Price/pc
90	Integrated	Stainless steel	B	511	41	53	7211	£ 2,029
120	Integrated	Stainless steel	B	794	49	60	7221	£ 2,329
150	Integrated	Stainless steel	B	846	48	61	7300	£ 2,519

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical specifications



**Proline wall 90 cm
7211 stainless steel**



**Proline wall 120 cm
7221 stainless steel**



**Proline wall 150 cm
7300 stainless steel**

Functions

Controls	Buttons	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6
With noise reduction	▪	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	Optional	Optional	Optional
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪
Run-on timer (min.)	10	10	10
Cleaning indicator for grease filter	▪	▪	▪
Replacement indicator for recirculation filter	▪	▪	▪

Lighting

Type of lighting (number/W)	LED (4×2)	LED (4×2)	LED (4×2)
Lighting colour (K)	2,700	2,700	2,700

Technical characteristics

Integrated motor	▪	▪	▪
Weight cooker hood / motor casing (kg)	31,5	40	47
Mains voltage (V) / Electrical connection value (W)	230 / 145	230 / 264	230 / 278

Dimensions

Dimensions (B×D) (mm)	898×554	1198×554	1498×554
Height of the cooker hood (Hmin–Hmax) (mm)	710–1100	710–1100	710–1100
Height of the cooker hood with recirculation (Hmin–Hmax) (mm)	780–1170	780–1170	780–1170
Maximum height with shaft extension (mm) optional	1460	1460	1460
Maximum height with shaft extension with recirculation (mm) optional	1530	1530	1530
Exhaust opening diameter (mm)	150	150	150
Exhaust position	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750



Air quantity and sound level


Type	Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20μPa) / sound power (re 1pW)			
		Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
7211 Integrated motor	700	225 / 295	304 / 327	390 / 345	511 / 365	29 / 41	35 / 48	40 / 53	45 / 58
7221 Integrated motor	1000	323 / 360	407 / 368	563 / 397	794 / 418	36 / 49	42 / 55	48 / 60	52 / 64
7300 Integrated motor	1000	323 / 361	406 / 383	569 / 403	846 / 422	35 / 48	41 / 54	48 / 61	54 / 66

Noise levels measured in accordance with IEC 60704-2:13 standards, flow rates according to IEC 61591.

Technical drawings


Proline wall 90 cm

7211

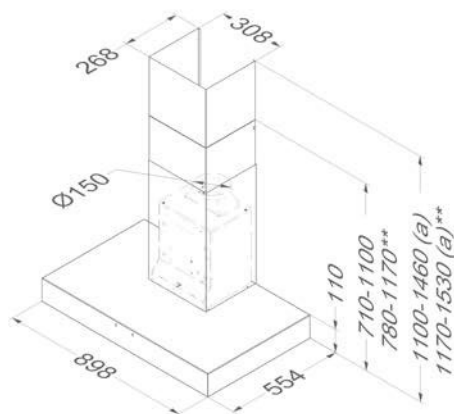


Proline wall 120 cm

7221

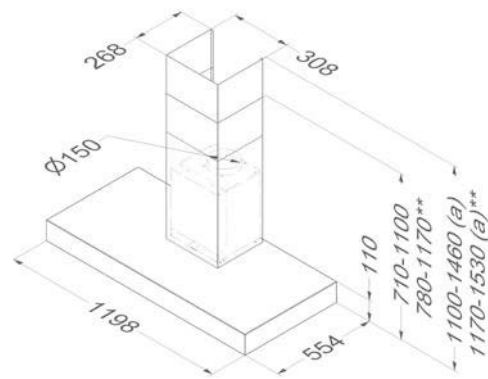

Proline wall 150 cm

7300

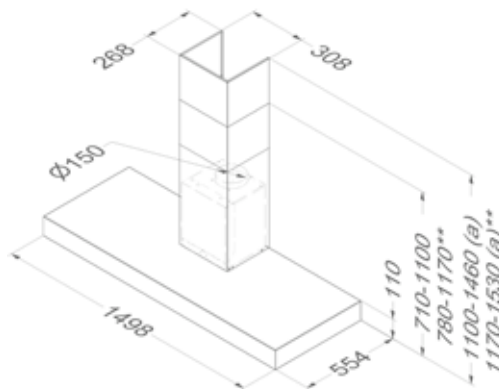

a) With chimney extension - **With recirculation



Accessories

	Reference	Price/pc	7211	7221	7300
Miscellaneous					
Chimney extension Stainless steel	7410.100	£ 213	▪	▪	▪
Back panel 900×690×15 (B×H×D) (mm) Stainless steel	150.200	£ 236	▪		
Back panel 900×750×15 (B×H×D) (mm) Stainless steel	150.275	£ 266	▪		
Back panel 1200×690×15 (B×H×D) (mm) Stainless steel	170.200	£ 266		▪	
Back panel 1200×750×15 (B×H×D) (mm) Stainless steel	170.275	£ 279		▪	
Back panel 1500×690×15 (B×H×D)(mm) Stainless steel	7200.200	£ 308			▪
Back panel 1500×750×15 (B×H×D) (mm) Stainless steel	7200.275	£ 322			▪
Grease filter (replacement)	7400.020	£ 79	▪	▪	
Grease filter (replacement) (2 pcs to order)	7400.020	£ 79			▪
Kit for InTouch including an interface (to be mounted before installation of the hood as a replacement for the original interface) and a remote control	990.021	£ 131	▪	▪	▪
Kit connection with external cover and/or lighting	990.030	£ 134	▪	▪	▪
Kit with LED lighting (4,000 K)	906.307	£ 131	▪	▪	▪

7400.020



906.307



990.021



990.030





Accessories

	Reference	Price/pc	7211	7221	7300
Recirculation					
Recirculation kit	7210.400	£ 208	▪	▪	
Recirculation kit	7300.400	£ 318			▪
Monoblock replacement filter	7300.055	£ 139	▪	▪	
Monoblock replacement filter (2 pcs to order)	7300.055	£ 139			▪







Salsa

- Slim design
- High quality simplicity
- Easy and simple control
- Reversible chimney for recirculation as standard
- Subtle LED lighting (3,000 K)



Distance
Maximum distance
between cooker hood
and hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	EEl	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Stainless steel	A	617	48	58	6500	£ 899
90	Integrated	Stainless steel	A	640	45	57	6510	£ 999
	Integrated	Black	A	640	45	57	6512	£ 1,149

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical specifications



**Salsa wall 60 cm
6500 stainless steel**



**Salsa wall 90 cm
6510 stainless steel
6512 black**

Functions

Controls	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	5	5
Recirculation	Optional (Carbon cartridge replacement)	Optional (Carbon cartridge replacement)
Run-on timer (min.)	5, 10, 15, 20	5, 10, 15, 20
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting

Type of lighting (number/W)	LED (2×2)	LED (3×2)
Lighting colour (K)	3,000	3,000

Technical characteristics

Colour	6500 stainless steel	6510 stainless steel 6512 black (≈RAL 9005)
Integrated motor	▪	▪
Weight cooker hood / motor casing (kg)	18	20
Mains voltage (V) / Electrical connection value (W)	230 / 210	230 / 241

Dimensions


Dimensions (B×D) (mm)	598×520	898×520
Height of the cooker hood (Hmin–Hmax) (mm)	710–1140	710–1140
Height of the cooker hood with recirculation (Hmin–Hmax) (mm)	765–1205	765–1205
Maximum height with shaft extension (mm) optional	1460	1460
Maximum height with shaft extension with recirculation (mm) optional	1525	1525
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6500	Integrated motor	700	244 / 403	318 / 468	419 / 512	617 / 549	36 / 48	41 / 53	47 / 58	55 / 67
6510, 6512	Integrated motor	700	248 / 413	329 / 466	423 / 505	640 / 544	33 / 45	38 / 51	44 / 57	54 / 66



Technical drawings

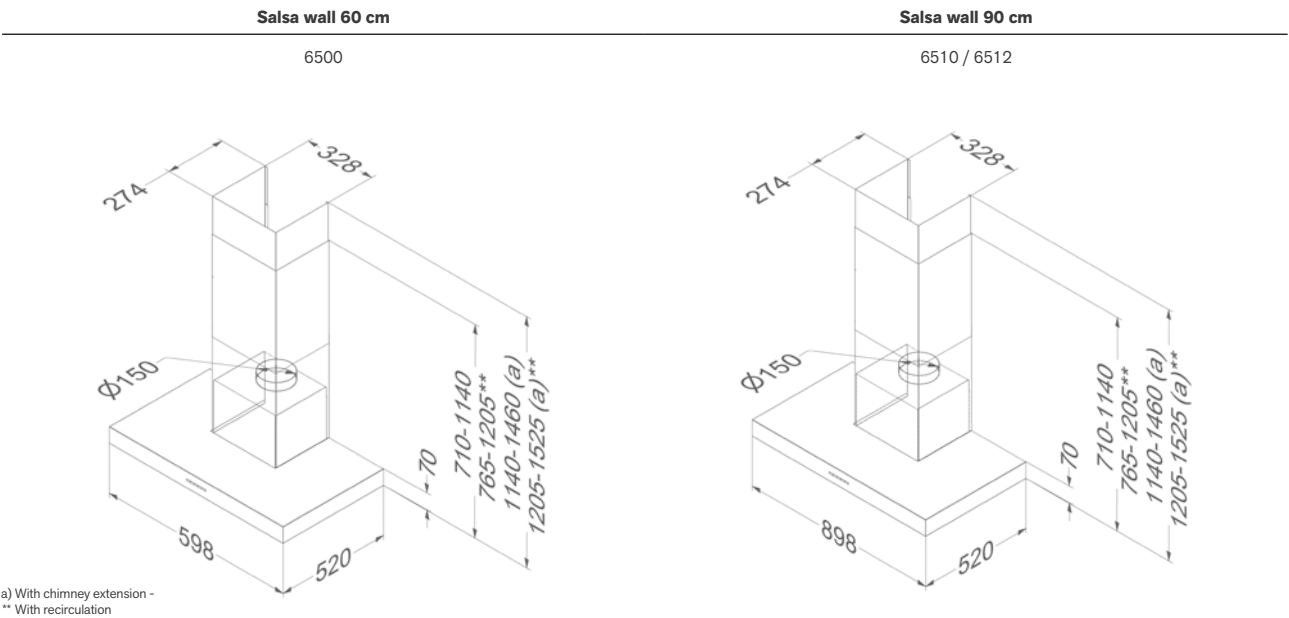

Accessories

	Reference	Price/pc	6500	6510	6512
Motor at a distance					
Chimney extension Stainless steel	6200.100	£ 229	•	•	
Chimney extension Black	6512.100	£ 269			•
Back panel 600×690×15 (B×H×D) (mm) Stainless steel	140.200	£ 199	•		
Back panel 900×690×15 (B×H×D) (mm) Stainless steel	150.200	£ 236		•	
Back panel 900×690×15 (B×H×D) (mm) Black	152.200	£ 239			•
Back panel 900×750×15 (B×H×D) (mm) Stainless steel	150.275	£ 266		•	
Grease filter (replacement) (2 pcs to order)	6200.020	£ 49	•	•	•
Recirculation					
Recirculation kit	6200.400	£ 130	•	•	•
Carbon cartridge replacements (replacement)	6200.055	£ 59	•	•	•





Island cooker hoods

Mood



Width

90 cm
100 cm
108 cm
120 cm



Colour

White
Stainless steel
Black
Steel look



Motor

Integrated
Not included



Exhaust

To the outside
Recirculation



Zen




Flatline



p. 200

p. 204

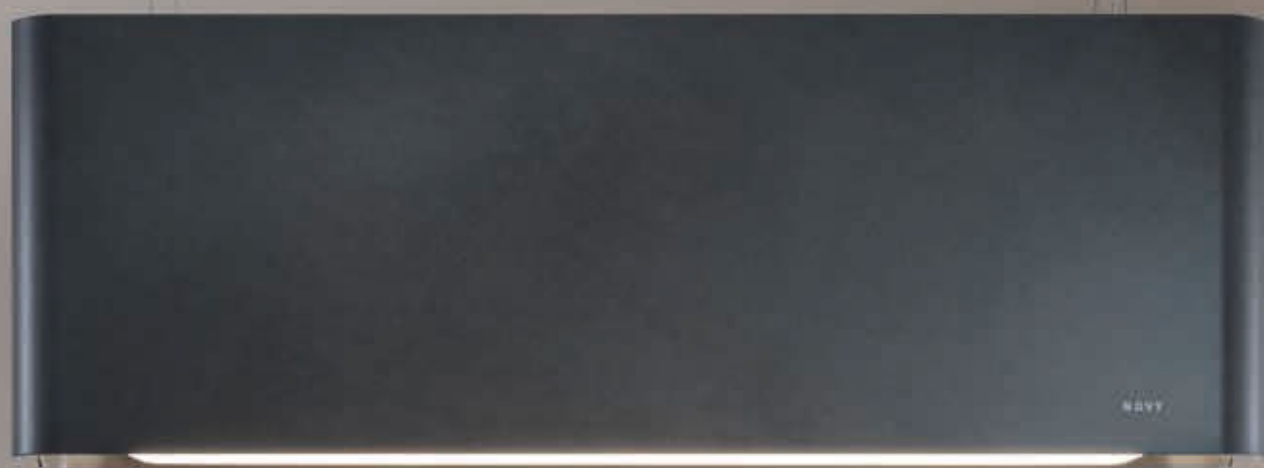

Mood

- Efficient cooker hood and lighting in one
- Adjustable light intensity and colour temperature from 2,700 K to 5,000 K
- Recirculation as standard for additional planning options
- Extended lighting function for the right amount of light and atmosphere during and after cooking (cooking mode and mood mode)
- Operation and settings possible via smartphone or tablet, as well as via remote control



Premium
Product distributed through a selection of partners.



Recirculation
Standard with recirculation.



InTouch
Function for controlling the cooker hood from the hob.



Novy Connect
Operation and settings possible via smartphone or tablet



Width (cm)	Motor	Colour	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
				Minimum	maximum		
108	Integrated	White	661	53	69	7550	£ 2,699
	Integrated	Black	661	53	69	7552	£ 2,699
	Integrated	Steel look	661	53	69	7555	£ 2,899

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical specifications

Mood 108 cm
7550 white / 7552 black /
7555 steel look



Functions

Controls	Remote control / Novy Connect
Number of speed settings	4
With noise reduction	▪
Recirculation	▪ (monoblock)
InTouch function for hobs	▪
Auto-Stop, automatic switch-off after 3 hours	▪
Run-on timer (min.)	30
Cleaning indicator for grease filter	▪
Replacement indicator for recirculation filter	▪

Lighting

Type of lighting (W)	LED (32) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour mode mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)

Technical characteristics

Colour	7550 white (≈RAL 9003) / 7552 black (≈RAL 9005) 7555 steel look
Integrated motor	▪
Weight cooker hood / motor casing (kg)	32
Mains voltage (V) / Electrical connection value (W)	230 / 202

Dimensions


Dimensions (B×D) (mm)	1080×246
Height of the Cooker hood (mm)	370
Exhaust position	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–850

Air quantity and sound level

Type	Maximum free flow rate (m³/h)	Air quantity (m³/h)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
		Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
7550, 7552, 7555 Integrated motor	1010	324	432	534	661	41 / 53	47 / 59	52 / 64	57 / 69

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

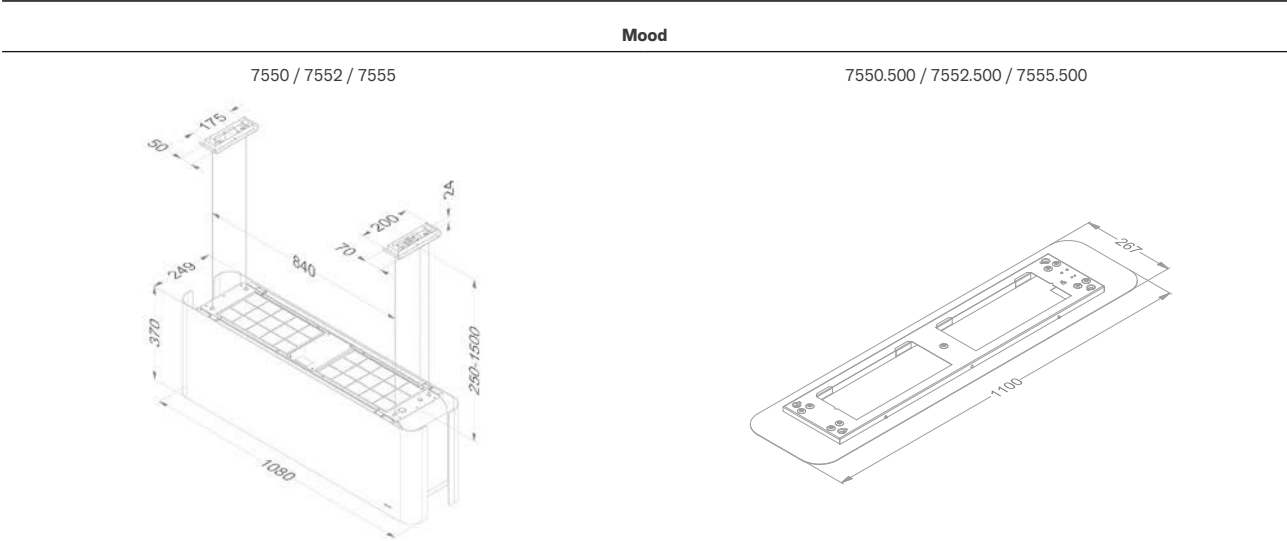

Accessories

	Reference	Price/pc	7550	7552	7555
Miscellaneous					
Grease filter (replacement) (4 pcs to order)	7550.030	£ 59	▪	▪	▪
Kit with longer hanging cables (4×3,5 m)	7550.100	£ 99	▪	▪	▪
Mounting set black	7552.300	£ 99		▪	
Mounting set steel look	7555.300	£ 99			▪
Ceiling plate white	7550.500	£ 149	▪		
Ceiling plate black	7552.500	£ 149		▪	
Ceiling plate steel look	7555.500	£ 149			▪
Recirculation					
Monoblock replacement filter (set contains 2 pcs)	7550.400	€ 279	▪	▪	▪









Zen

- An attractive design due to its translucent solid surface
- With warm ambient lighting (2,700 K) or neutral lighting (4,000 K)
- Functional LED lighting warm white (2,700 K) adjustable to neutral white (4,000 K) and vice versa
- Recirculation as standard, which makes an exhaust to the outside unnecessary



Recirculation
Standard with recirculation.



InTouch
Function for controlling the cooker hood from the hob.



Remote control
Supplied as standard with Remote control.



Distance
Maximum distance between cooker hood and hob.



Width (cm)	Motor	Colour	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
				Minimum	maximum		
120	Integrated	Warm white	497	39	58	7510 (2,700 K)	£ 3,099
	Integrated	Neutral white	497	39	58	7520 (4,000 K)	£ 3,099

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



Technical specifications



**Zen 120 cm
7510 white (solid surface)
warm white**



**Zen 120 cm
7520 white (solid surface)
neutral white**

Functions

Controls	Buttons + remote control	Buttons + remote control
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	▪ (monoblock)	▪ (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	30	30
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Functional lighting

Type of lighting (number/W)	LED (4×2)	LED (4×2)
Dimmable Lighting	▪	▪
Lighting colour (K)	2,700 (adjustable to 4,000)	4,000 (adjustable to 2,700)

Ambient lighting

Type of lighting (number/W)	T5 (2×8 + 2×21)	T5 (2×8 + 2×21)
Lighting colour	warm white	neutral white

Technical characteristics

Integrated motor	▪	▪
Weight cooker hood / motor casing (kg)	49	49
Mains voltage (V) / Electrical connection value (W)	230 / 180	230 / 180

Dimensions

Dimensions (B×D) (mm)	1200×550	1200×550
Height of the Cooker hood (mm)	370	370
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–850	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–850	650–850


Air quantity and sound level

Type	Maximum free flow rate (m³/h)	Air quantity (m³/h)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
		Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
7510, 7520 Integrated motor	815	185	318	429	497	26 / 39	39 / 52	45 / 58	48 / 61

Technical drawings

Zen

7510 / 7520

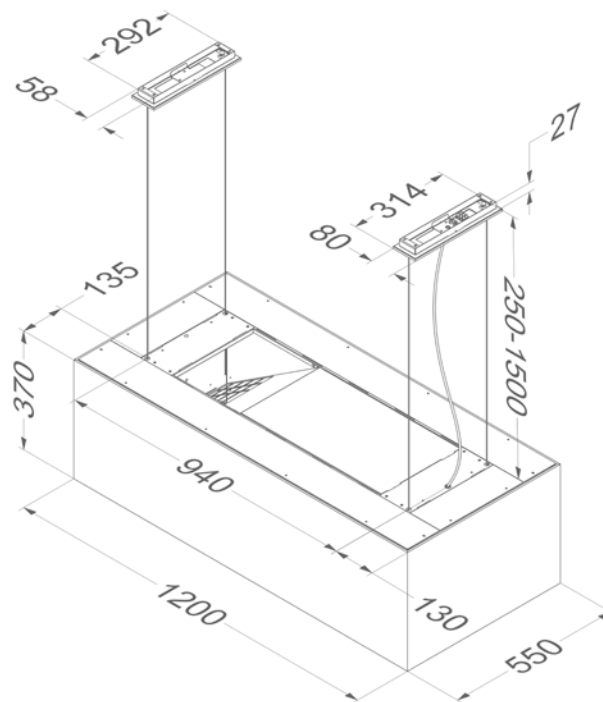

Accessories

	Reference	Price/pc	7510	7520
Miscellaneous				
Grease filter (replacement)	7400.020	£ 79	•	•
Kit with longer hanging cables (4×3,5 m)	7500.100	£ 53	•	•
Recirculation				
Monoblock replacement filter (Set per 2)	7300.055	£ 139	•	•





Flatline

- Extra slim lines
- Seamless finish
- Subtle looking LED lighting (2,700 K)
- Reversible chimney for recirculation as standard



Distance
Maximum distance
between cooker hood
and hob.



Recirculation
Recirculation is optional.



InTouch
Function for controlling the
cooker hood from the hob.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated	Stainless steel	A+	707	35	53	7640	£ 2,169
	Integrated	Black	A+	707	35	53	7642	£ 2,299
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7645	£ 1,939
100	Integrated	Stainless steel	A	743	47	57	7650	£ 2,259
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7655	£ 2,069
120	Integrated	Stainless steel	A	744	47	57	7660	£ 2,449
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7665	£ 2,269

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

⁽¹⁾ This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).
The air volume/noise level depends on the type of motor and installation.



Technical specifications



**Flatline island 90 cm
7640 stainless steel /
7642 black (≈RAL 9005)**



**Flatline island 90 cm
7645 stainless steel
motor not included**

Functions

Controls	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	

Lighting

Type of lighting (number/W)	LED (4×2)	LED (4×2)
Dimmable Lighting	▪	▪
Lighting colour (K)	2,700	2,700

Technical characteristics

Colour	7640 stainless steel 7642 black (≈RAL 9005)	7645 stainless steel
Integrated motor	▪	
Motor not included (suitable for wall motor, flat roof motor outside)		▪
Weight cooker hood / motor casing (kg)	36	33 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 118	230 / 13 + motor

Dimensions (mm)

Dimensions (B×D)	900×600	900×600
Height of the cooker hood (Hmin–Hmax) (mm)	563–730	563–730
Height of the cooker hood with recirculation (Hmin–Hmax) (mm)	679–860	
Maximum height with chimney extension Optional A/B	1040 / 1350	1040 / 1350
Maximum height with chimney extension for recirculation Optional A/B	1170 / 1480	
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–850	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–850	650–850



**Flatline island 100 cm
7650 stainless steel**



**Flatline island 100 cm
7655 stainless steel
motor not included**



**Flatline island 120 cm
7660 stainless steel**



**Flatline island 120 cm
7665 stainless steel
motor not included**

Buttons	Buttons	Buttons	Buttons
3 + power function	3 + power function	3 + power function	3 + power function
6	6	6	6
▪	▪	▪	▪
Optional (monoblock)		Optional (monoblock)	
▪	▪	▪	▪
▪	▪	▪	▪
10	10	10	10
▪	▪	▪	▪
▪		▪	
LED (4×2)	LED (4×2)	LED (4×2)	LED (4×2)
▪	▪	▪	▪
2,700	2,700	2,700	2,700
7650 stainless steel	7655 stainless steel	7660 stainless steel	7665 stainless steel
▪		▪	
	▪		▪
38	35 + motor	42	39 + motor
230 / 308	230 / 13 + motor	230 / 300	230 / 13 + motor
1000×700	1000×700	1200×700	1200×700
563–730	563–730	563–730	563–730
679–860		679–860	
1040 / 1350	1040 / 1350	1040 / 1350	1040 / 1350
1170 / 1480		1170 / 1480	
150	150	150	150
Top	Top	Top	Top
650–850	650–850	650–850	650–850
600–850	600–850	600–850	600–850
650–850	650–850	650–850	650–850

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1 pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
7640, 7642	Integrated	815	277 / 66	467 / 237	620 / 382	707 / 382	24 / 35	34 / 46	41 / 53	44 / 56
7645	Not included ⁽¹⁾		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7650	Integrated	1000	216 / 314	296 / 472	451 / 531	743 / 555	32 / 47	35 / 50	41 / 57	50 / 64
7655	Not included ⁽¹⁾		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7660	Integrated	1000	219 / 324	302 / 470	459 / 496	744 / 511	32 / 47	36 / 51	41 / 57	51 / 65
7665	Not included ⁽¹⁾		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.




⁽¹⁾ This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).
The air volume/noise level depends on the type of motor and installation.



Technical drawings


Flatline island 90 cm

7640 / 7642 / 7645

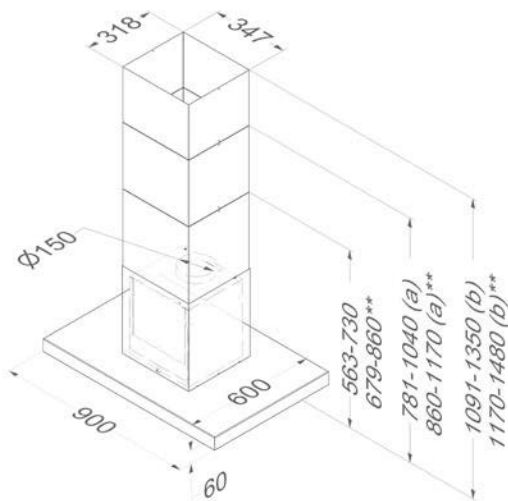


Flatline island 100 cm

7650 / 7655

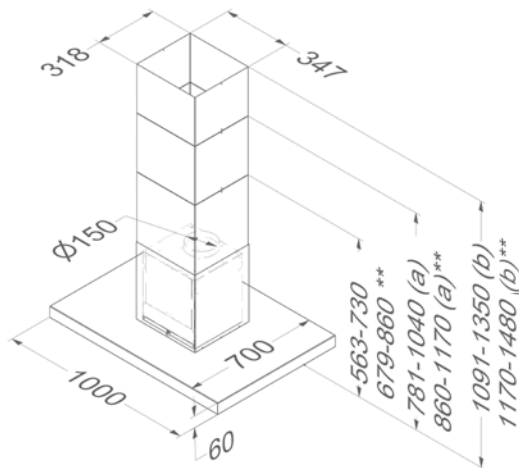

Flatline island 120 cm

7660 / 7665

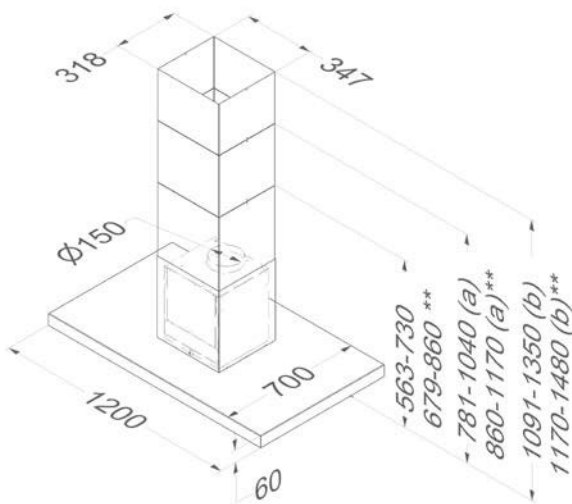

(a) With chimney extension - (b) With chimney extension (higher) - **With recirculation




Accessories

	Reference	Price/pc	7640	7642	7645	7650	7655	7660	7665
Motor at a distance									
Remote motor for inside	245.999	£ 539			▪		▪		▪
Wall motor, minimum 5 m between cooker hood and motor	445.999	£ 879			▪		▪		▪
Roof motor 48.8 cm height	745.999	£ 1,479			▪		▪		▪
Roof motor with noise reduction 78.4 cm height	755.999	£ 1,699			▪		▪		▪
Miscellaneous									
Chimney extension stainless steel option A	7640.100	£ 399	▪		▪	▪	▪	▪	▪
Chimney extension stainless steel option B	7640.101	£ 529	▪		▪	▪	▪	▪	▪
Chimney extension black option A	7642.100	£ 399		▪					
Chimney extension balck option B	7642.101	£ 529		▪					
Grease filter (replacement)	7400.020	£ 79	▪	▪	▪	▪	▪	▪	▪
Kit with LED lighting (4,000 K)	906.307	£ 131	▪	▪	▪	▪	▪	▪	▪
Remote control	840.029	£ 80	▪	▪	▪	▪	▪	▪	▪
Extension cable for remote motors (5 m)	7000.092	£ 35			▪		▪		▪
Kit connection with external cover and/or lighting	990.030	£ 134	▪	▪	▪	▪	▪	▪	▪

245.999




245.999



445.999




445.999



745.999




745.999



755.999



755.999



7400.020




840.029



990.030



990.030



Accessories

	Reference	Price/pc	7640	7642	7645	7650	7655	7660	7665
Recirculation									
Recirculation kit	7640.400	£ 248	•	•		•		•	
Monoblock replacement filter	7600.060	£ 129	•	•		•		•	





Cooker hood accessories

Recirculation	p. 214
Motors	p. 216
Maintenance	p. 218
Installation accessories	p. 220

Accessories can be found per product on the relevant product page.

Novy offers a wide range of accessories that make it possible to adapt a cooker hood to your specific situation. In this way it will be a great pleasure to use your cooker hood.

Recirculation

By choosing for recirculation you no longer need to vent warm air to the outside, which saves you energy. In addition, a cooker hood with recirculation offers more freedom with regard to its position in comparison to a cooker hood with an exhaust to the outside. This technology is based on an upgraded monoblock carbon filter that provides an extraordinary level of cooking odour absorption.

Installation methods

Novy built-in box with monoblock filter for ceiling units, downdrafts and canopy

The Novy built-in box with monoblock filter must be built into an existing structure, cabinet or plinth, and is connected to the cooker hood. The odours of the extracted cooking vapours are filtered out by the monoblock filter in the box. It also reduces the noise more. The air is then returned to the kitchen through the exhaust grill of the box. This excellent efficiency is due to the elegant design of the box, in which small hexagonal holes ensure a greater air flow. Visually, the smooth surface results in a subtle integration into the plinth.



Basic kits to integrate in ceiling units and canopies

For ceiling units and canopies a kit can be ordered when opting for recirculation. The basic kit consists of a monoblock filter. This is placed directly behind the grease filter. The exhaust grill to let the air back into the kitchen must be provided by you.

Basic kits for wall and island cooker hoods

For wall and island cooker hoods you must order a basic kit when opting for recirculation. This basic kit with monoblock filter is integrated in the chimney of the cooker hood. It also reduces the noise more. The air is then returned to the kitchen through the outlets in the cooker hood chimney.

Cooker hoods with recirculation as standard

Some cooker hoods are equipped with recirculation and a monoblock filter as standard.

Replaceable carbon filter cartridges

Salsa and Essence cooker hoods use replaceable carbon filter cartridges. In due course the cartridges must be replaced. The kit consists of a cartridge filled with active carbon granules. The exhaust grill must be provided by the customer in the canopy, decorative chimney or cabinet (except in the case of Salsa).

Maintenance

Replacement monoblock filter or active carbon filter cassettes

After 3 to 5 years (depending the models and on the intensity of cooking) the monoblock filter needs to be replaced. All cooker hoods have a cleaning indicator which, in the case of a monoblock filter, lights up after 900 hours of cooking (depending on the models). In the case of cooker hoods with active carbon filter cartridges, the indicator lights up after 120 hours and the cassette must be replaced.



Motors

Remote motors

For models without an integrated motor, you have the option of a remote motor. The choice is between installation indoors and various motors for outside installation. This enables you to install a cooker hood in a suspended ceiling with limited height and create absolute silence in the kitchen. When installing a remote motor the sound level depends on the type of motor and installation. If the Novy cooker hood is installed without a Novy motor (or the motor without a Novy cooker hood) the warranty becomes void.

Kit to install remote motors inside

For the models Pureline and Mini Pureline the motor can be easily installed remotely inside with an additional installation kit.

Extension cable for remote motors (5 m)

A number of models have the option of a remote motor. The cooker hood contains as standard a connection cable of approx. 4 m (depending on the model). A 5 m extension cable is optionally available if the distance between the cooker hood and the motor is greater.

Technical specifications

Functions

Controls

Number of speed settings

With noise reduction

With insulated flat roof uprising

With insulated flat roof uprising and silencer

With automatic return cover

With insulated switch

Minimum/ maximum operating temperature (°C)

Material

Material flat roof motor : aluminium (ALMG3)

Material flat roof motor : aluminium (ALMG3)

Material non-return valve : galvanised

Technical characteristics

Weight cooker hood / motor casing (kg)

Mains voltage (V) / Electrical connection value (W)

Dimensions

Dimensions motorunit (B×D×H) (mm)

Exhaust opening diameter (mm)

Exhaust position

Diameter inlet (tube) (mm)

Diameter inlet (opening roof) (mm)



**Remote motor for
installation inside**
245.999 Black
£ 539



Wall motor
445.999 Stainless steel
£ 879







Flat roof motor 48,8 cm
745.999
£ 1,479



Flat roof motor 78,4 cm
755.999
With noise reduction
£ 1,699

In combination with the cooker hood	In combination with the cooker hood	In combination with the cooker hood	In combination with the cooker hood
3 + power function	3 + power function	3 + power function	3 + power function
▪	▪	▪	▪
		▪	▪
		▪	▪
		▪	▪
		-25 / 65	-25 / 65
		▪	▪
		▪	▪
		▪	▪
6	11	10,7	13,9
230 / 250	230 / 184	230 / 191	230 / 191
309×280×244	400×130×500	388×388×488	388×388×784
150	150		
Top / right / left / front / rear	Below	Vertical	Vertical
150		150	150
	180	180	180



Air quantity and sound level

Type	Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
		Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
245.999	1000	401 / 350	503 / 410	634 / 370	760 / 450	30 / 42	35 / 47	40 / 53	43 / 57
445.999	1400	330 / 380	520 / 450	660 / 520	940 / 660	31 / 43	37 / 49	40 / 52	43 / 56
745.999	1180	855 / 590	975 / 625	1080 / 650	1150 / 670	61	62	63	64
755.999	1180	850 / 590	970 / 625	1075 / 650	1145 / 670	55	56	57	58

Sound level of roof motors measured on the suction side Lwa5 (dB(A)) (DIN 45635-2).

Maintenance

Grease filters

To ensure optimum filtering of grease it is necessary to regularly (1x per month) clean the grease filter. The integrated cleaning indicator in almost all cooker hoods is a reminder and illuminates after 20 cooking hours. The grease filter can be cleaned in the dishwasher. However, we recommend replacing the filter after 5 years. To find the correct grease filter for your cooker hood please consult the technical table at the end.

Stainless steel cleaner

For optimum cleaning of your stainless steel cooker hood we recommend you use Novy stainless steel cleaner. This is a soft nourishing mousse that leaves no traces leaving a clean surface.

906.060	Stainless steel cleaner	£ 25
---------	-------------------------	------

Installation accessories

InTouch

InTouch offers the possibility to operate the Novy cooker hood from the Novy InTouch induction hob.

Practically all cooker hoods with electronic control can be operated as standard or with an optional InTouch kit to be combined with Novy InTouch induction hobs.

Cloud, Maxi Pureline, Pureline, Mini Pureline, Crystal Fusion Pro, Fusion, Flatline, Mood and Zen are standard equipped with the InTouch function.

For the telescopic cooker hood (663/693), Vision, Headline, Proline an optional InTouch kit (incl. remote control) is available.

990.021	Kit for InTouch (incl. remote control)	£ 131
---------	--	-------

Remote control

Cloud, Maxi Pureline, Pureline, Mini Pureline, Mood and Zen are equipped with a remote control as standard.

The Mood and Cloud can also be controlled via the Novy Connect application.

Optionally, the Crystal, Fusion Pro, Fusion, Flatline can be equipped with a remote control.

840.029	Remote control	£ 80
---------	----------------	------

LED lighting kit

For a number of models you can replace the existing LED lighting of 2,700 K (warm white) by LED lighting of 4,000 K (neutral white).

Pureline, Mini Pureline and Zen are equipped with dual LED lighting for which the colour temperature can be changed manually, before installation, from 2,700 K (warm white) to 4,000 K (neutral white).

Control kit for external lighting or remote covers

Would you like to connect additional atmospheric lighting to your cooker hood? Or do you need to control a remote cover the moment the cooker hood is switched on? With this kit you can control both.

Maxi Pureline, Pureline: 6833, 6834, 6838, 6839, 6843, 6844, 6848, 6849 are equipped as standard with a connector which makes it possible to switch on external lighting (max. 300 W).

Extension chimneys for wall and island hoods

If the standard lower chimney is too short, you can always opt for a extension chimney. When ordering an extension the lower chimney is included to avoid colour differences.

Back panels for wall hoods

With Novy back panels you can give the wall under your decorative wall hood a beautiful finish in stainless steel.

Adapter for limited installation height in ceiling, canopy, decorative chimney or cabinet

If you have limited space in the ceiling, canopy, decorative chimney or cabinet to install a cooker hood, an adapter can limit the installation height by making the transition to a flat duct.

Installation accessories

The proper functioning of a cooker hood is partly determined by the correct installation of the device and it is important that you take this into consideration at an early stage of the construction process. Novy offers a wide range of installation accessories for your specific situation.

Flat exhaust ducts

These ducts are very suitable for ceilings with a small overall height.

906.401

Flat duct 1000 mm
89×222×1000 mm
(male)
£ 37



906.405

Angle adaptor
Ø 150 mm with
air deflectors
94×227×205 mm
(male) Height 140 mm
£ 39



906.402

Connector
94×227×80 mm
(female)
£ 10



906.406

Transfer
Ø 150 mm
94×227×150 mm
(female)
£ 29



906.403

Horizontal bend 90°
with air deflectors
94×227×290 mm
(female)
£ 39



906.407

Wall duct stainless steel
with non-return valve
222×89 mm
depth connector
120 mm
£ 211



906.408

Flat flexible tube
89×222×750 mm
(male)
£ 69



906.418

Bend 15° for flat duct
94×227×138 mm
(male/female)
£ 12.20



906.404

Vertical bend 90° with
air deflectors
94×175×227 mm
(female)
£ 35



Round ducting & accessories

Round tube 1 m
906.410
 Ø 125 mm – £ 33
906.415
 Ø 150 mm – £ 36



Connector
906.412
 Ø 125 mm – £ 9
906.417
 Ø 150 mm – £ 11.50



Bend 90° (with air deflectors
 for a better result)
 Height 220 mm
906.411
 Ø 125 mm – £ 24
906.416
 Ø 150 mm – £ 35



Aluminium tube
906.216
 Ø 127 mm, length 10 m – £ 71
906.218
 Ø 152 mm, length 10 m – £ 71



Aluminium tube
906.219
 Ø 127 mm, length 3 m – £ 29
906.217
 Ø 152 mm, length 3 m – £ 33
906.430
 Ø 202 mm, length 3 m – £ 50



Flexible silencer
906.288
 Ø 127 mm, length 1 m – £ 45
906.287
 Ø 152 mm, length 1 m – £ 47



Y-piece
906.299
 2×Ø 125 mm – Ø 150 mm – £ 60
906.298
 2×Ø 150 mm – Ø 200 mm – £ 155
906.297
 elbow 45° Ø 125 mm / stuk – £ 39



Clamp
906.290
 range Ø 60 – 135 mm – £ 7.50
906.291
 range Ø 60 – 215 mm – £ 8.50
906.292
 aluminium tape width 50 mm
 (per 50 m) – £ 21



Installation kit (non-return valve,
 3 m aluminium tape, 3 m aluminium
 tube 906.217 or 906.219)
906.300
 Ø 125 mm – £ 79
906.301
 Ø 150 mm – £ 99



Non-return valves

The use of a non-return valve is advised to prevent cold air flows coming in from outside.

Non-return valve
906.431
 mechanical non-return valve,
 Ø 125 mm – £ 36
906.432
 mechanical non-return valve,
 Ø 150 mm – £ 39



Electric valve
906.270
 electric valve Ø125 mm, 230 V,
 N/C with spring return, to combine
 with kit 990.030 – £ 239
906.271
 electric valve Ø150 mm, 230 V,
 N/C with spring return, to combine
 with kit 990.030 – £ 249



Wall exhaust valve

This valve covers the exhaust duct. It keeps cold air out, but also other weather and natural influences, so that the exhaust does not get blocked.

Wall exhaust valve aluminium
906.078
 173×173 mm,
 for exhaust Ø 125 mm – £ 65
906.178
 210×210 mm,
 for exhaust Ø 150 mm – £ 67
906.079
 246×246 mm,
 for exhaust Ø 200 mm – £ 85



Wall conduct kit for

Wall conduct kit with telescopic
 pipe including built-in heat retention
 non-return valve and stainless
 steel grill for ground-level and
 conventional installation at ceiling
 height.



Wall conduct kit for ducting
906.420
 Ø 150 mm – £ 419
 Wall conduct kit for flat exhaust duct
906.425
 89×222 mm – £ 419





Hobs

Induction Pro









Induction Power










Induction Comfort





Cooking profile

Intensity	  	 	 /  
-----------	---	--	---

Number of cooking zones

1			
2			
3			
4			
5			

Flexzone / Expandable zone

1			
2			


Dimensions cooking zones (W)



Dimensions	200×240 / Ø280	200×240 / Ø230 / Ø280	Ø175 / Ø210 / Ø260
------------	----------------	-----------------------	--------------------




p. 226

p. 230

p. 234

 Normal use, basic cooking function, different zones with different power

  Normal use, extensive cooking functions, different zones with high power

   Intensive use, extensive cooking function, equal zones with high power

Induction
Domino's




















Induction
Multizone



Gas
Pro



	 /  		 /  
			
			
			
			
			
			
	200×240 / Ø175 / Ø210	Ø175 / Ø210	Ø230 / Ø270

p. 238

p. 242

p. 246

NOVY HOBS

Control at your fingertips

You can cook intuitively. The cooker hood can also be controlled from the hob. InTouch technology combines cooker hood and induction hob into one, without the need for remote control. Wireless, and seamless.

- InTouch connection with cooker hood
- Flexible cooking zones
- Automatic pot detection



Installation method

Have your induction hob placed on top of the worktop (surface-mounted) or opt for recessed integration (flush-mounted) and go completely seamless.

Intuitive operation

All our hobs can be operated intuitively. Thanks to the slider and touch control function, every temperature change is at your fingertips.

Minimalist design

A sleek design stripped of all frills - you'll recognise this in every Novy hob. Even the controls remain in the background and only light up when you start cooking.



Convenient flex zones

Connect two cooking zones into one large cooking zone. Convenient if you have large pots and pans on the hob, or if you want to grill like on the barbecue.



Pot move function

Move your pot or pan to a new zone without losing the programming of the current zone.



Pro with the Chef

The Chef function automatically links flex zones together whilst maintaining the right temperature. Choose between quick power cooking, simmering or keep warm.



InTouch technology

Operate your cooker hood from your hob with wireless RF communication.





Induction Pro

- Even more flexibility and cooking surface through the use of octagonal zones
- Professional cooking programs, such as Chef function, Pot Move and Grill function for even more functionality
- White slider touch control operation
- Maximum power of 3,700 W for the octagonal zones and 5,000 W for the round zone
- Surface and flush installation possible



InTouch
Function for controlling the cooker hood from the hob.



Chef fonction
Chef function for activation of programmed zones.



Flex zones
Automatic or manual linking of 2 cooking zones.



Keep-warm function
Keep-warm function to keep food at a constant temperature.



Outside dimensions (W×D) (cm)	Opening (W×D) (cm)	Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Ref.	Price/pc
65×52	56×49	4	4× 240×200	▪	7400	1773	£ 1,829
80×52	75×49	4	4× 240×200	▪	7400	1775	£ 1,599
80×52	75×49	5	4× 240×200, 200×300	▪	11100	1776	£ 2,599
91×41	89×39	4	4× 200×240	▪	7400	1777	£ 2,359
90×52	85×49	5	4× 240×200, Ø280	▪	11100	1778	£ 2,699

Video

Five reasons for choosing a Novy induction hob



Technical specifications



**Induction Pro
1773**



**Induction Pro
1775**



**Induction Pro
1776**

Controls

Type of controls	Slider touch control	Slider touch control	Slider touch control
Colour of controls	White	White	White

Glass built-in / Finish

Finish	Round border	Round border	Round border
Surface / Flush	• / •	• / •	• / •
Black opaque glass	•	•	•

Functions cooker hood

InTouch function	•	•	•
Number of power levels	9+Power + SuperPower	9+Power + SuperPower	9+Power + SuperPower
Chef function	•	•	•
Pot move function	•	•	•
Count-up timer	•	•	•
Cooking presets	•	•	•
Wipe guard	•	•	•
Automatic pot detection	•	•	•
Flex zones	• (x2)	• (x2)	• (x2)
Automatic bridge function flexzones	•	•	•
Residual heat indication	•	•	•
Timer on each zone	•	•	•
Independent cooking timer	•	•	•
Keep-warm function	42°, 70° and 94°	42°, 70° and 94°	42°, 70° and 94°
Grill function	• (x2)	• (x2)	• (x2)
Safety lock hob	•	•	•
Stop & Go	•	•	•
Automatic cooking	•	•	•

Cooking zones

Number of cooking zones	4	4	5
Cooking zone 1	Front left	Front left	Front left
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3700)	240×200 / 2100 (3700)	240×200 / 2100 (3700)
Cooking zone 2	Rear left	Rear left	Rear left
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3700)	240×200 / 2100 (3700)	240×200 / 2100 (3700)
Cooking zone 3	Right front	Right front	Central
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3700)	240×200 / 2100 (3700)	200×300 / 2100 (3700)
Cooking zone 4	Back right	Back right	Right front
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3700)	240×200 / 2100 (3700)	240×200 / 2100 (3700)
Cooking zone 5			Back right
Dimensions (mm) / Power (Boost) (W)			240×200 / 2100 (3700)



Dimensions (Installation details see p. 252-253)

Dimensions (W×D×H) (mm)	650×520×47	800×520×47	800×520×47
Opening (B×D) (mm)	560×490	750×490	750×490
Weight (kg)	11.5	13.5	14.2

Technical details

Total connected load (W)	7400	7400	11100
Multiphase supply voltage	230 V / 400 V - 2N	230 V / 400 V - 2N	230 V / 400 V - 2N / 3N
Single-phase supply voltage	230 V	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60	50 – 60



Accessories

Side profiles 1700.092 - £ 51	•	•	•
Grill plate 1700.093 - £ 249	•	•	•
Teppanyaki plate 1700.095 - £ 249	•	•	•



Induction Pro
1777

Induction Pro
1778

Slider touch control	Slider touch control
White	White
Round border	Round border
▪ / ▪	▪ / ▪
▪	▪
▪	▪
9+Power + SuperPower	9+Power + SuperPower
▪	▪
▪	▪
▪	▪
▪	▪
▪	▪
▪ (×2)	▪ (×2)
▪	▪
▪	▪
▪	▪
▪	▪
42°, 70° and 94°	42°, 70° and 94°
▪ (×2)	▪ (×2)
▪	▪
▪	▪
▪	▪
4	5
Left	Front left
200×240 / 2100 (3700)	240×200 / 2100 (3700)
Left central	Rear left
200×240 / 2100 (3700)	240×200 / 2100 (3700)
Right central	Central
200×240 / 2100 (3700)	280 / 2600 (5500)
Right	Right front
200×240 / 2100 (3700)	240×200 / 2100 (3700)
	Back right
	240×200 / 2100 (3700)
	
910×410×47	900×520×47
890×390	850×490
14.8	16.7
7400	11100
230 V / 400 V - 2N	230 V / 400 V - 2N / 3N
230 V	230 V
50 – 60	50 – 60
▪	▪
▪	▪
▪	▪

1700.092



1700.093



1700.095





Induction Power

- Great flexibility due to the combination of octagonal and round zones
- Extensive cooking programs for refined cooking, such as the Chef function
- Red slider touch control operation
- Maximum power of 3,700 W per zone
- Surface and flush installation possible



InTouch
Function for controlling the cooker hood from the hob.



Flex zones
Automatic or manual linking of 2 cooking zones.









Keep-warm function
Keep-warm function to keep food at a constant temperature.



Chef function
Chef function for activation of programmed zones (only for 1768).



Outside dimensions (W×D) (cm)	Opening (W×D) (cm)	Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Ref.	Price/pc
65×52	56×49	4 	2× 240×200, 2× Ø210	▪	7400	1763	£ 1,439
80×52	75×49	4 	2× 240×200, Ø230, Ø280		7400	1724	£ 1,699
80×52	75×49	4 	2× 240×200, Ø230, Ø280	▪	7400	1726	£ 1,829
90×52	85×49	5 	2× 240×200, Ø280, 2× Ø200	▪	11100	 1768	£ 1,699
100×40	98×38	4 	2× 200×240, 2× Ø230	▪	7400	1767	£ 1,899

Technical specifications



**Induction Power
1724**



**Induction Power
1726**

Controls

Type of controls	Slider touch control	Slider touch control
Colour of controls	Red	Red

Glass built-in / Finish

Finish	Round border	Round border
Surface / Flush	• / •	• / •
Black opaque glass	•	•

Functions

InTouch function		•
Number of power levels	9 + Power + SuperPower	9 + Power + SuperPower
Chef function		
Count-up timer	•	•
Automatic pot detection	•	•
Flex zones	• (×1)	• (×1)
Automatic bridge function flexzones	•	•
Residual heat indication	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function	42°, 70° and 94°	42°, 70° and 94°
Safety lock hob	•	•
Stop & Go	•	•
Automatic cooking	•	•

Cooking zones

Number of cooking zones	4	4
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3700)	240×200 / 2100 (3700)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3700)	240×200 / 2100 (3700)
Cooking zone 3	Right front	Right front
Dimensions (mm) / Power (Boost) (W)	230 / 2100 (3700)	230 / 2100 (3700)
Cooking zone 4	Back right	Back right
Dimensions (mm) / Power (Boost) (W)	280 / 2100 (3700)	280 / 2100 (3700)
Cooking zone 5		
Dimensions (mm) / Power (Boost) (W)		



Dimensions (Installation details see p. 252-253)

Dimensions (W×D×H) (mm)	800×520×47	800×520×47
Opening (B×D) (mm)	750×490	750×490
Weight (kg)	13.4	13.4

Technical details


Total connected load (W)	7400	7400
Multiphase supply voltage	230 V / 400 V – 2N	230 V / 400 V – 2N
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60

Accessories

Side profiles 1700.092 - £ 51	•	•
--------------------------------------	---	---



Induction Power
1763



Induction Power
1767



Induction Power
1768

Slider touch control	Slider touch control	Slider touch control
Red	Red	Red
Round border	Round border	Round border
• / •	• / •	• / •
•	•	•
•	•	•
9 + Power + SuperPower	9 + Power + SuperPower	9 + Power + SuperPower
•	•	•
•	•	•
• (×1)	• (×1)	• (×1)
•	•	•
•	•	•
•	•	•
•	•	•
42°, 70° and 94°	42°, 70° and 94°	42°, 70° and 94°
•	•	•
•	•	•
•	•	•
4	4	5
Front left	Front left	Front left
240×200 / 2100 (3700)	200×240 / 2100 (3700)	240×200 / 2100 (3700)
Rear left	Left central	Rear left
240×200 / 2100 (3700)	200×240 / 2100 (3700)	240×200 / 2100 (3700)
Right front	Right central	Central
210 / 1850 (3000)	230 / 2100 (3700)	280 / 2100 (3700)
Back right	Back right	Right front
210 / 1850 (3000)	230 / 2100 (3700)	200/ 1850 (3000)
		Back right
		200 / 1850 (3000)
650×520×47	1000×400×47	900×520×47
560×490	980×380	850×490
11.1	14.8	15.7
7400	7400	11100
230 V / 400 V – 2N	230 V / 400 V – 2N	230 V / 400 V – 2N / 3N
230 V	230 V	230 V
50 – 60	50 – 60	50 – 60
•	•	•



Induction Comfort

- Round zones with different capacities and various sizes
- Red slider touch control operation
- Default cooking programs for easy use
- Surface and flush installation possible









InTouch
Function for controlling the cooker hood from the hob.




Keep-warm function
Keep-warm function to keep food at a constant temperature.




Outside dimensions (W×D) (cm)	Opening (W×D) (cm)	Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Ref.	Price/pc
65×52	56×49	3	 2× Ø200, Ø290	▪	6400	1752	£ 899
65×52	56×49	4	 2× Ø175, 2× Ø210		7400	1753	£ 979
80×52	75×49	4	 2× Ø175, 2× Ø210		7400	1754	£ 1,179
80×52	75×49	4	 2× Ø175, 2× Ø210	▪	7400	1755	£ 1,309
80×37	76×34	3	 Ø175, 2× Ø210	▪	6700	1757	£ 1,099
90×52	85×49	5	 3× Ø175, Ø210, Ø250	▪	7400	1758	£ 1,599

Technical specifications



Induction Comfort
1752



Induction Comfort
1753

Controls

Type of controls	Touch control	Slider touch control
Colour of controls	Red	Red

Glass built-in / Finish

Finish	Round border	Round border
Surface / Flush	• / •	• / •
Black opaque glass	•	•

Functions cooker hood

InTouch function	•	
Number of power levels	9 + Power	9 + Power
Residual heat indication	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function		70°
Safety lock hob	•	•
Stop & Go		•
Automatic boiling function		•

Cooking zones

Number of cooking zones	3	4
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (Boost) (W)	200 / 2300 (3000)	210 / 2300 (3000)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (Boost) (W)	200 / 1100 (1400)	175 / 1100 (1400)
Cooking zone 3	Right	Right front
Dimensions (mm) / Power (Boost) (W)	290 / 2300 (3000)	175 / 1100 (1400)
Cooking zone 4		Back right
Dimensions (mm) / Power (Boost) (W)		210 / 2300 (3000)
Cooking zone 5		
Dimensions (mm) / Power (Boost) (W)		



Dimensions (Installation details see p. 252-253)


Dimensions (W×D×H) (mm)	650×520×52	650×520×52
Opening (B×D) (mm)	560×490	560×490
Weight (kg)	10.1	11

Technical details

Total connected load (W)	6400	7400
Multiphase supply voltage	230 V / 400 V - 2N	230 V / 400 V - 2N
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60

Accessories

Side profiles 1700.092 - £ 51	•	•
-------------------------------	---	---



Induction Comfort
1754 / 1755



Induction Comfort
1757




Induction Comfort
1758

Slider touch control	Slider touch control	Slider touch control
Red	Red	Red
Round border	Round border	Round border
▪ / ▪	▪ / ▪	▪ / ▪
▪	▪	▪
▪ (only for 1755)	▪	▪
9 + Power	9 + Power	9 + Power
▪	▪	▪
▪	▪	▪
▪	▪	▪
70°	70°	70°
▪	▪	▪
▪	▪	▪
▪	▪	▪
4	3	5
Front left	Left	Front left
210 / 2300 (3000)	210 / 2300 (3000)	175 / 1400 (2000)
Rear left	Central	Rear left
175 / 1100 (1400)	175 / 1100 (1400)	175 / 1100 (1400)
Right front	Right	Central
175 / 1100 (1400)	210 / 2300 (3000)	250 / 2300 (3000)
Back right		Right front
210 / 2300 (3000)		175 / 1100 (1400)
		Back right
		210 / 2300 (3000)
800×520×52	800×370×52	900×520×52
750×490	760×340	850×490
12.6	10.9	16.8
7400	6700	7400
230 V / 400 V - 2N	230 V / 400 V - 2N	230 V / 400 V - 2N
230 V	230 V	230 V
50 – 60	50 – 60	50 – 60

▪

▪

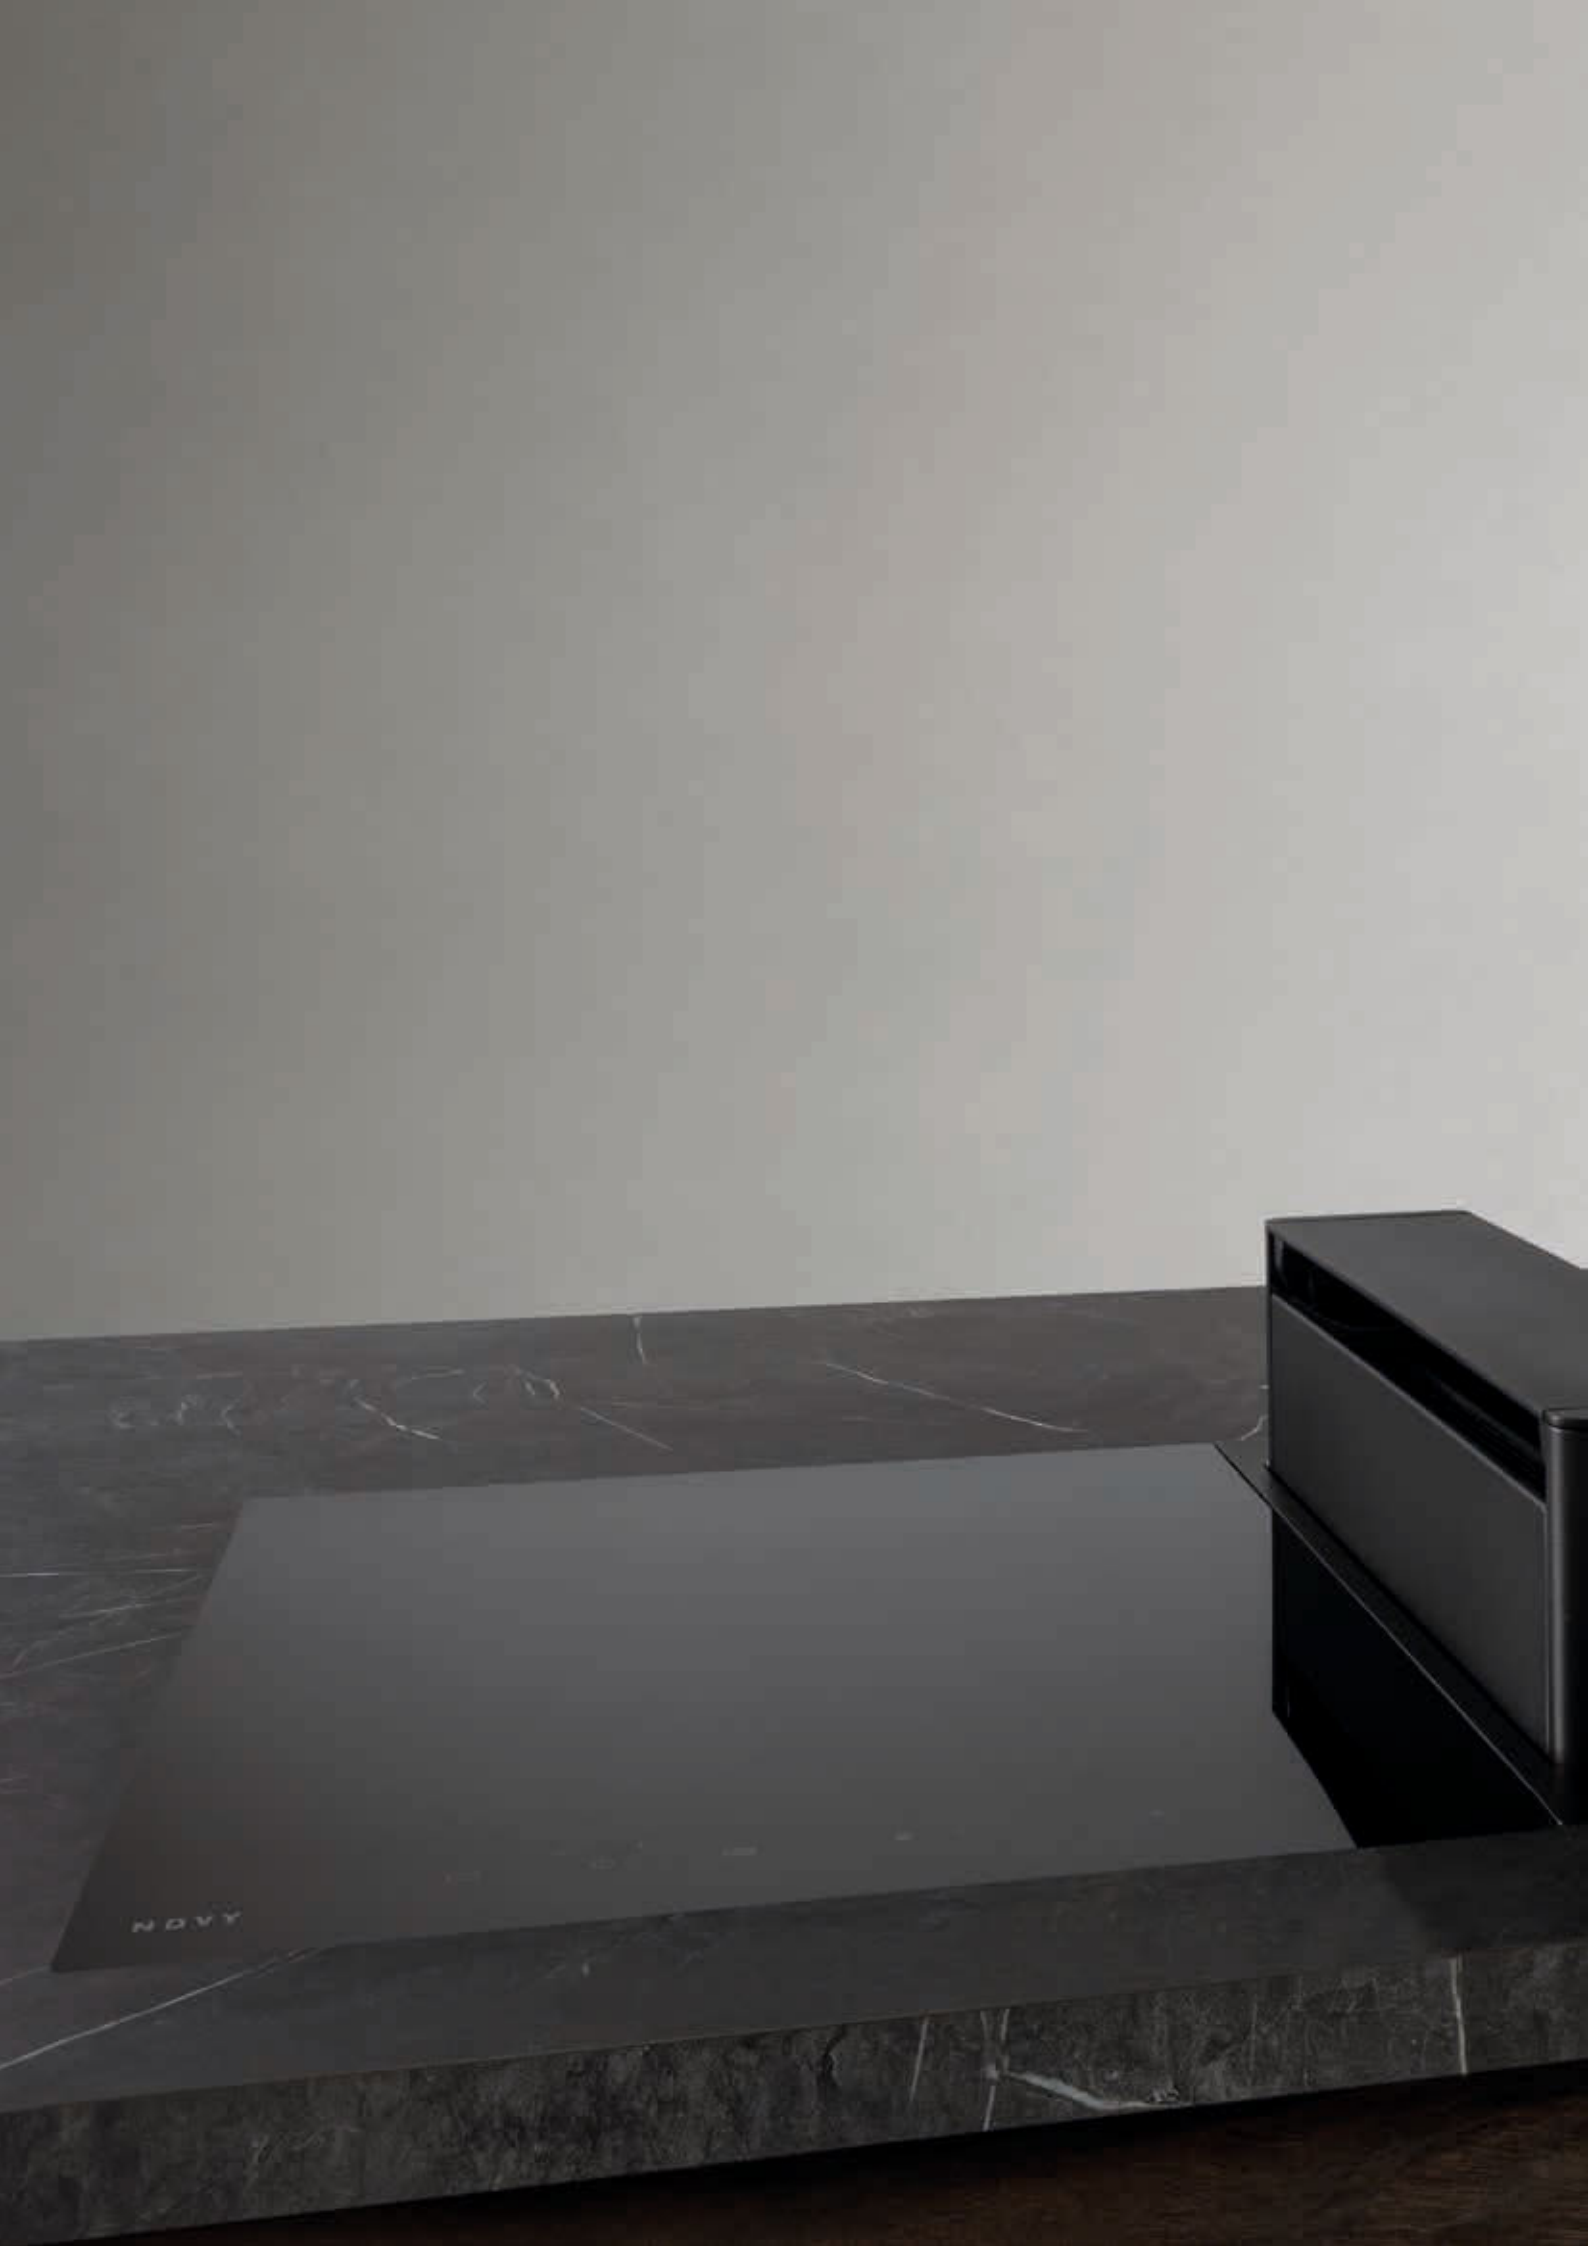

Induction Domino's

- Create your own ideal setting
- Red slider or touch operation depending on the type of domino
- Rounded edge
- Surface and flush installation possible



Type	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Max. output (W)	Ref.	Price/pc
Induction 38 cm						
Induction Comfort	38×52	2	Ø175, Ø210	3700	3784	£ 699
Induction Power	38×52	2	2× 240×200	3700	3774	£ 799
Induction Pro	38×52	2	2× 240×200	3700	3762	£ 1,299
Teppan yaki	38×52	2		2800	3753	£ 2,159
Wok ⁽¹⁾	38×52	1		3200	3773	£ 1,899
Induction 58 cm						
Teppan yaki	58×52	4		5600	3754	£ 3,099
Fryer						
Fryer	29×52			2000	3711	£ 599

(1) Demeyere wok Ø36 cm standaard meegeleverd.

Technical specifications



**Inductie 38 cm
Teppan Yaki
3753**



**Inductie 58 cm
Teppan Yaki
3754**



**Inductie 38 cm
Pro
3762**

Controls

Type of controls	Slider touch control	Slider touch control	Slider touch control
Colour or controls	Red	Red	Red

Glass built-in / Finish

Finish	Round border	Round border	Round border
Surface / Flush	• / •	• / •	• / •
Black opaque glass			•

Functions

Residual heat indication	•	•	•
Flex zones	• (×1)	• (×2)	• (×1)
Manual bridge function flexzones	•	•	•
Timer on each zone	•	•	•
Independent cooking timer	•	•	•
Keep-warm function	120°, 150° and 180°	120°, 150° and 180°	42°, 70° and 94°
Safety lock hob	•	•	•
Stop & Go	•	•	•
Automatic boiling function			•

Cooking zones

Number of cooking zones	2	4	2
Cooking zone 1	Voor	Front left	Front
Dimensions (mm) / Power (Boost) (W)	1400	1400	240×200 / 2100 (3700)
Cooking zone 2	Achter	Rear left	Back
Dimensions (mm) / Power (Boost) (W)	1400	1400	240×200 / 2100 (3700)
Cooking zone 3		Front right	
Dimensions (mm) / Power (Boost) (W)		1400	
Cooking zone 4		Back right	
Dimensions (mm) / Power (Boost) (W)		1400	

Dimensions (Installation details see p. 252-253)

Dimensions (W×D×H) (mm)	380×520×54	580×520×54	380×520×47
Opening (B×D) (mm)	370×490	560×490	350×490
Weight (kg)	10,4	12,6	7
Content (l)			

Technical details

Total connected load (W)	2800	5600	3700
Multiphase supply voltage		230 V / 400 V - 2N	
Single-phase supply voltage	230 V	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60	50 – 60
Connection cable	•	•	•

Accessories

Demeyere Wok (included)			
Profile Domino's 3730.020 - £ 28	•	•	•



**Inductie 38 cm
Wok
3773**



**Inductie 38 cm
Power
3774**



**Inductie 38 cm
Comfort
3784**




**Fryer
3711**

Slider touch bediening Red	Touch control Red	Touch control Red	Rotating button
Round border ▪ / ▪ ▪	Round border ▪ / ▪ ▪	Round border ▪ / ▪ ▪	Round border ▪ / - ▪
▪	▪	▪	
	▪ (x1) ▪		
▪	▪	▪	
▪	▪	▪	
42°, 70° and 94° ▪	▪	▪	
▪			
1 Front 360 (wok) / 2000 (3200)	2 Front 240×200 / 1600 (1850) Back 240×200 / 2100 (3000)	2 Front 175 / 1100 (1400) Back 210 / 2300 (3000)	
380×520×121 370×490 11,6	380×520×52 350×490 11,6	380×520×52 350×490 7	290×520×235 270×475 6,1 4
3200	3700	3700	2000
230 V 50 – 60 ▪	230 V 50 – 60 ▪	230 V 50 – 60 ▪	230 V 50 – 60 ▪
▪	▪	▪	



Induction Multizone

- 3 or 4 loose cooking zones with a separate control zone to freely design into the worktop
- Extensive cooking functions
- Rounded borders
- Surface or flush mounting is possible
- Maximum power of 1,770 W for zones of 175 mm
- Maximum power of 3,100 W for zones of 210 mm



**InTouch**

Function for controlling the cooker hood from the hob.

**Keep-warm function**

Keep-warm function to keep food at a constant temperature.



Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Ref.	Price/pc
4 	2 × Ø175, 2 × Ø210	•	7400	1790	£ 1,699
3 	Ø175, 2 × Ø210	•	6800	1791	£ 1,699

Technical specifications



Induction Multizone
1790



Induction Multizone
1791

Controls

Type of controls	Slider touch control	Slider touch control
Colour of controls	Red	Red

Glass built-in / Finish



Finish	Round border	Round border
Surface / Flush	• / •	• / •
Black opaque glass	•	•

Uitrusting

InTouch functie	•	•
Residual heat indication	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function	70°	70°
Safety lock hob	•	•
Stop & Go	•	•

Cooking zones

Number of cooking zones	4, zones to be positioned as required	3, zones to be positioned as required
Cooking zone 1	Left	Front left
Dimensions (mm) / Power (Boost) (W)	210 / 2300 (3100)	210 / 2300 (3100)
Cooking zone 2	Left central	Rear left
Dimensions (mm) / Power (Boost) (W)	175 / 1100 (1770)	175 / 1100 (1770)
Cooking zone 3	Right central	Back right
Dimensions (mm) / Power (Boost) (W)	175 / 1100 (1770)	210 / 2300 (3100)
Cooking zone 4	Right	
Dimensions (mm) / Power (Boost) (W)	210 / 2300 (3100)	



Dimensions



Dimensions (W×D×H) (mm)	see p. 245	see p. 245
Opening (B×D) (mm)	see p. 245	see p. 245
Weight (kg)	14.5	12.4

Technical details

Total connected load (W)	7400	6800
Multiphase supply voltage	230 V / 400 V - 2N	230 V / 400 V - 2N
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60

Technical drawing


Dimensions

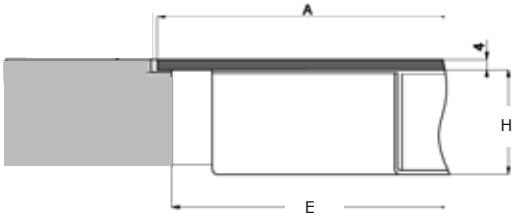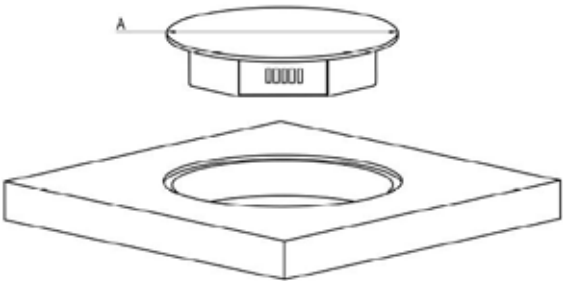

			(mm)	A	E	H
Diam A	300 mm	Cooking zone 210 mm	Cooking zone 175	Ø 270	Ø 254	57
Diam A	270 mm	Cooking zone 175 mm	Cooking zone 210	Ø 300	Ø 284	57
			Control panel	326 × 160 – R80	314 × 150 – R75	35


Built-in sketch

Surface

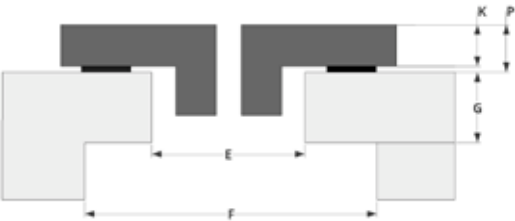

(mm)	E	F	G	K	P
Cooking zone 175	Ø 254	Ø 265	max 20	4	6
Cooking zone 210	Ø 284	Ø 295	max 20	4	6
Control panel	314 × 150 – R75			4	6

Flush

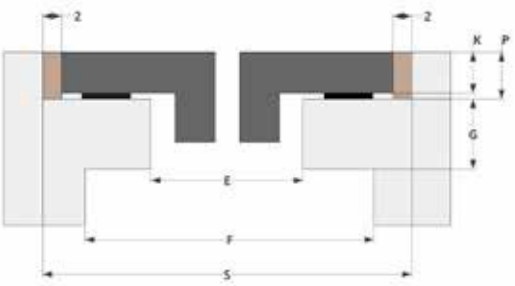

(mm)	E	F	G	K	P	S
Cooking zone 175	Ø 254	Ø 265	max 20	4	6	Ø 274
Cooking zone 210	Ø 284	Ø 295	max 20	4	6	Ø 304
Control panel	314 × 150 – R75			4	6	330 × 164 – R82




Gas Pro

- Gas burners are directly integrated in your worktop (Caution, gas burners not compatible with wooden worktops)
- Robust, cast iron pot carriers in stylish and timeless look
- Visual control of the flame
- Sufficient space between the burners for large pots and pans
- Choice of various cooking setups
- Consult website for installation & handling instructions



Model	Width (cm)	Number of zones	Max output (W)	Ref.	Price/pc
Altar Top black	30	1	3.000	56 002	£ 1,299
Azuma Top black	30	1	5.000	56 004	£ 1,499
Capital Top black	60	3	2.000, 3.000, 5.000	56 006	£ 3,299
Cusin Top black	90	3	3.000, 2× 5.000	56 008	£ 3,299
Dempo Top black	90	4	2.000, 3.000, 2× 5.000	56 010	£ 3,599
Danau Top black	120	4	2.000, 3.000, 2× 5.000	56 012	£ 3,599
Drum Top black	120	4	2.000, 3.000, 2× 5.000	56 014	£ 3,599
Elbrus Top black	90	5	2× 2.000, 2× 3.000, 5.000	56 016	£ 4,099

Technische specificaties

				
	Altar top 56 002 / black	Azuma Top 56 004 / black	Capital Top 56 006 / black	Cusin Top 56 008 / black
Controls				
Type of controls	Rotating button	Rotating button	Rotating button	Rotating button
Glass built-in / Finish				
Built-in	•	•	•	•
Cast iron pan support	•	•	•	•
Colour	Black	Black	Black	Black
Functions				
Automatic spark ignition	•	•	•	•
Flame protection	•	•	•	•
Cooking zones				
Number of cooking zones	1	1	3	3
Cooking zone 1	Central	Central	Front left	Left
Power (W)	3000	5000	3000	5000
Cooking zone 2			Back left	Central
Power (W)			2000	3000
Cooking zone 3			Right	Right
Power (W)			5000	5000
Cooking zone 4				
Power (W)				
Cooking zone 5				
Power (W)				
Dimensions				
Dimensions (W×D×H) (mm)	213×503×89	213×503×89	533×503×89	853×403×89
Opening (B×D) (mm)	Check technical file	Check technical file	Check technical file	Check technical file
Weight (kg)	5,5	7,5	18,5	20,5
Technical details				
Total connected load	3000	5000	9800	13000
Supply voltage	230 V	230 V	230 V	230 V
Frequency	50	50	50	50
Connection cable	•	•	•	•
Accessories				
Support bar / 56 199 - £ 99 (1 set included as standard)	•	•	•	•
Wok ring / 93 005 - £ 249 (1 included as standard)		•	•	•



Dempo Top
56 010 / black

Rotating button



Danau Top
56 012 / black

Rotating button



Drum Top
56 014 / black

Rotating button



Elbrus Top
56 016 / black

Rotating button

•	•	•	•
•	•	•	•
Black	Black	Black	Black
•	•	•	•
•	•	•	•
4	4	4	5
Left	Left	Left	Front left
5000	5000	5000	3000
Central for	Center left	Center left	Back left
3000	3000	3000	2000
Center back	Center right	Center right	Central
2000	2000	2000	5000
Right	Right	Right	Front right
5000	5000	5000	3000
			Back right
			2000
853×503×89	1157×403×89	1157×503×89	853×503×89
Check technical file	Check technical file	Check technical file	Check technical file
25,5	25,5	25,5	29,5
14800	14800	14800	14600
230 V	230 V	230 V	230 V
50	50	50	50
•	•	•	•
•	•	•	•
•	•	•	•

56 199



93 005











Installation of a Novy hob



Dimensions

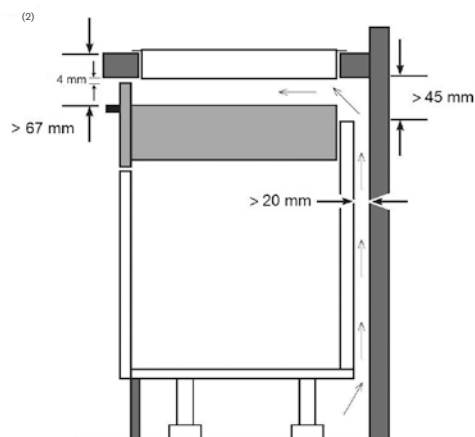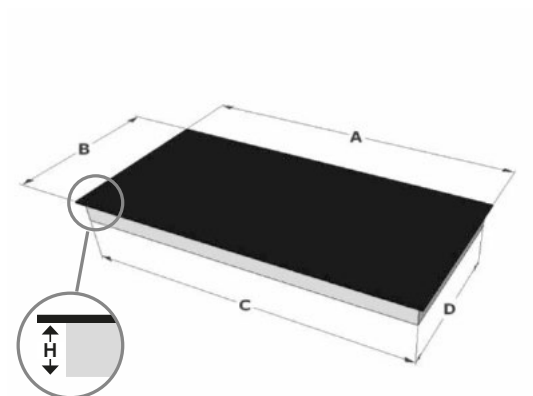

Surface installation

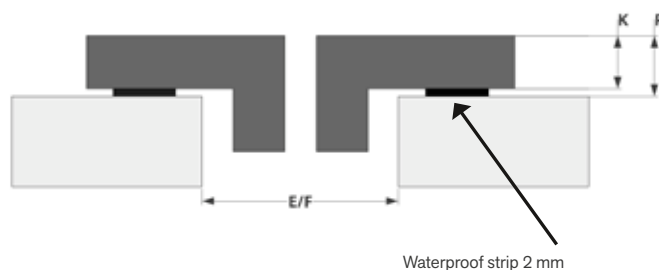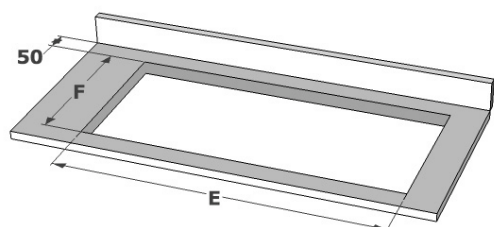

Flush installation

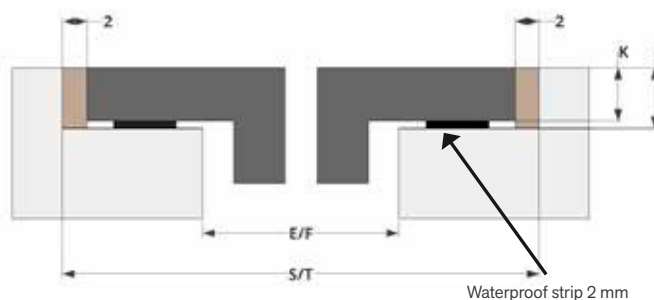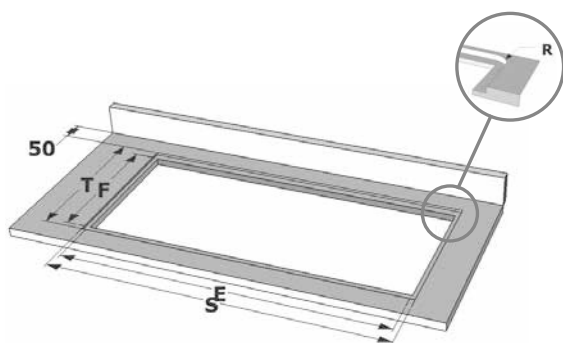

	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Induction Pro										
1773	650	520	560	490	47	7	654	524	4	6
1775	800	520	750	490	47	7	804	524	4	6
1776	800	520	750	490	47	7	804	524	4	6
1777	910	410	890	390	47	7	914	414	4	6
1778	900	520	850	490	47	7	904	524	4	6
	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Induction Power										
1724	800	520	750	490	47	7	804	524	4	6
1726	800	520	750	490	47	7	804	524	4	6
1763	650	520	560	490	47	7	654	524	4	6
1767	1000	400	980	380	47	7	1004	404	4	6
1768	900	520	850	490	47	7	904	524	4	6
	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Induction Comfort										
1752	650	520	560	490	52	7	654	524	4	6
1753	650	520	560	490	52	7	654	524	4	6
1754	800	520	750	490	52	7	804	524	4	6
1755	800	520	750	490	52	7	804	524	4	6
1757	800	370	760	340	52	7	804	374	4	6
1758	900	520	850	490	52	7	904	524	4	6
	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Induction Domino's										
3711	290	520	270	475	235	-	-	-	-	-
3753	380	520	370	490	54	7	384	524	6	8
3754	580	520	560	490	54	7	584	524	6	8
3762	380	520	350	490	47	7	384	524	4	6
3773	380	520	370	490	121	7	384	524	4	6
3774	380	520	350	490	52	7	384	524	4	6
3784	380	520	350	490	52	7	384	524	4	6
	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Gas Pro										
Check technical file										
	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Downdraft										
1801	780	520	750	490	192	7	784	524	4	6
1811	780	520	750	490	180	7	784	524	4	6
1821, 1831, 1841	880	520	860	500	65	7	884	524	4	6
1851, 1861	800	520	750	490	225	7	804	524	4	6
40 000	491	520	486	500	224	7	495	524	5	7
40 002	872	520	852	500	224	7	876	524	5	7
40 004	872	520	852	500	224	7	876	524	5	7
40 006	872	520	862	500	224	7	876	524	6	8
40 008	872	520	862	500	224	7	876	524	5	7
40 000 + 40 002-8	1364	520	1354	500	224	7	1368	524	6	8
40 002-8 + 40 002-8	1745	520	1735	500	224	7	1749	524	6	8
42 110, 42 120	1180	520	1160	490	65	7	1184	524	4	6

(1) This is the standard radius finish. Contact your worktop supplier if you would prefer a smaller radius.



Info

Premium Innovation Products p. 256

Cooker hoods p. 258

Hobs p. 259

Premium Innovation Products

Novy's dedication to innovation has led to a new generation of products. Technologically sophisticated, they set the tone in relation to aesthetics, ease of use, simplicity and, of course, silence.














Due to their innovative and progressive features, these products are known as Novy Premium Innovation Products. This catalogue presents: Novy Panorama , Gas Pro, One, Mood, Cloud, Pureline Compact, Fusion Pro and induction hobs 1775 and 1768. You can recognise these products from the **Premium Innovation logo**.









Novy Premium Innovation Partners



To support these products, Novy has decided to collaborate with a **selection of partners**. They receive extensive training and can offer you the expertise and advice you need to make the right choices. This is how Novy and its Premium Innovation Partners guarantee maximum comfort for your dream kitchen.

Cooker hood icons

	<p>Ecosmart</p> <p>Extra quiet, super-efficient, longlasting and energy friendly products.</p>		<p>Design filter</p> <p>A filter with a modern and elegant design.</p>
	<p>Cooker hoods with a motor (direct extraction)</p> <p>The most common model is a cooker hood with an exhaust to the outside.</p>		<p>Perimeter extraction</p> <p>Placing a bottom plate under the cooker hood concentrates the extraction around the edges. This small gap speeds up the extraction. The smaller the area, the faster the airflow. This acceleration enhances the efficiency of the extraction system.</p>
	<p>Remote control</p> <p>These models come with a remote control, the other cooker hoods can also be fitted with them, by ordering an extra kit.</p>		<p>Cubic Motor</p> <p>A square motor housing which can be installed remotely. The housing can be turned in any direction so that the exhaust direction can be chosen depending on the situation. This motor is designed for inside use.</p>
	<p>InTouch</p> <p>InTouch allows you to control your Novy cooker hood from your Novy induction hob.</p>		<p>Click&Fix</p> <p>A simple construction using a click system whereby the Pureline can be clicked into a false ceiling, after which only 4 screws need to be tightened.</p>
	<p>Installation height</p> <p>The installation height is the distance between the hob and the cooker hood. This height is extremely important for the optimum operation of the cooker hood. The advised installation heights are shown for each model.</p>		<p>Recirculation</p> <p>Sometimes a cooker hood with an external exhaust isn't possible for technical reasons or isn't permitted. A recirculation cooker hood is one which returns the filtered cooking fumes back into the room. The grease in the fumes is filtered by the grease filter and the odours are absorbed by a filter with activated carbon (a monoblock filter). Damp air is not eliminated in the filter, but can be removed by the room's ventilation system. Most cooker hoods can be fitted with a recirculation accessory.</p>
	<p>Novy Connect</p> <p>Thanks to the Novy Connect App you can control your Novy device via your smartphone or tablet. With the Novy Connect App you can not only record your preferences, but also consult information and indication for the maintenance of your fat and/or carbon filter.</p>		

Hob icons

	Chef function The cream of the crop is the Chef function, allowing you to link the Bridge zones automatically at the push of a button. The right-hand zone in setting 9 is for intensive cooking or baking. The centre zone in setting 6 is for simmering and the left-hand zone in setting 4 is to keep dishes warm.		Cooking zone layout Cooking zone layout, zones of different power and sizes.
P	Power and Super Power Each zone has its own Power function, which boosts power considerably. This function is ideal for f.e. boiling large quantities of water.		Cooking zone layout Cooking zone layout, where there are 2 octagonal zones on the left side for more flexibility and 2 powerfull round
U	Keep warm function The keep warm function makes it very easy to maintain a constant temperature of 70°C (or 94°C on specific models).		Cooking zone layout Cooking zone layout, with octagonal zones for maximum flexibility and cooking area.
II	Stop & Go Stop & Go can make sure that the power supply can be temporarily switched off. If you touch this control within 10 minutes, all the previously set levels are reinstated.		Grill function When using this function the Bridge function is automatically activated to create a larger cooking surface. This function allows you to grill in the most ideal conditions. See Induction Pro and Power.
Π	Bridge The bridge function allows you to link two adjoining zones so that you can control them in one movement. Very handy for large pots and pans. The linking goes automatically in the Pro and Power range.		Safe When the pan is removed only the contact heat of the pan remains. The residual heat cools down very quickly. If a zone is accidentally turned on but there is no pan on the zone, nothing happens. The hob is also equipped with additional safety features: <ul style="list-style-type: none"> - residual heat indicator - overheating safety - boil over safety - safety shut-off (when the device is left on for a long time) - child lock

	<p>Pot Move function</p> <p>By engaging the Pot Move function in the Pro range, you can move pots and pans to another zone, while the settings are automatically maintained.</p>	<p>Count-up timer</p> <p>In the Pro range, each zone has a separate count-up timer which starts counting when a zone is switched on. It serves as an additional reminder whenever you choose not to set a timer yourself.</p>
	<p>Black opaque glass</p> <p>The glass lets no light pass through, which results in an even black cooking surface without being able to see inside the device.</p>	<p>Wipe Guard</p> <p>Lock your controls with Wipe Guard, so that the hob can be cleaned easily.</p>
	<p>Timer and independent cooking timer</p> <p>Each zone has a separate timer and the hob is also fitted with an independent cooking timer.</p>	<p>Automatic boiling function</p> <p>The contents of the pan are first brought to the boil for a set time and then the cooking process continues at a set lower level.</p>
	<p>Touch Control</p> <p>All induction hobs are simple and discreet to operate. Most of the hobs have a combination of Touch Control and slider control.</p>	<p>Slider control</p> <p>With the slider control you only need to slide your finger over the control to achieve the desired level. The level can also be directly selected.</p>

Novy Ltd

Wiberforce House

Station Road

London NW4 4QE

United Kingdom

M: +44 (0) 7526 729197

D: +44 (0) 207 866 2493

novy@novy.com

www.novy.co.uk

Warranty terms and conditions

www.novy.co.uk

Footnotes

Novy reserves the right to adjust pricing without prior notice
and change model design.

Characteristics of the products on condition of changes
or printing errors. All colors in this catalogue can only be
represented approximately. The copy is not binding.
Novy reserves the right to adjust pricing without prior notice
and change model design.



